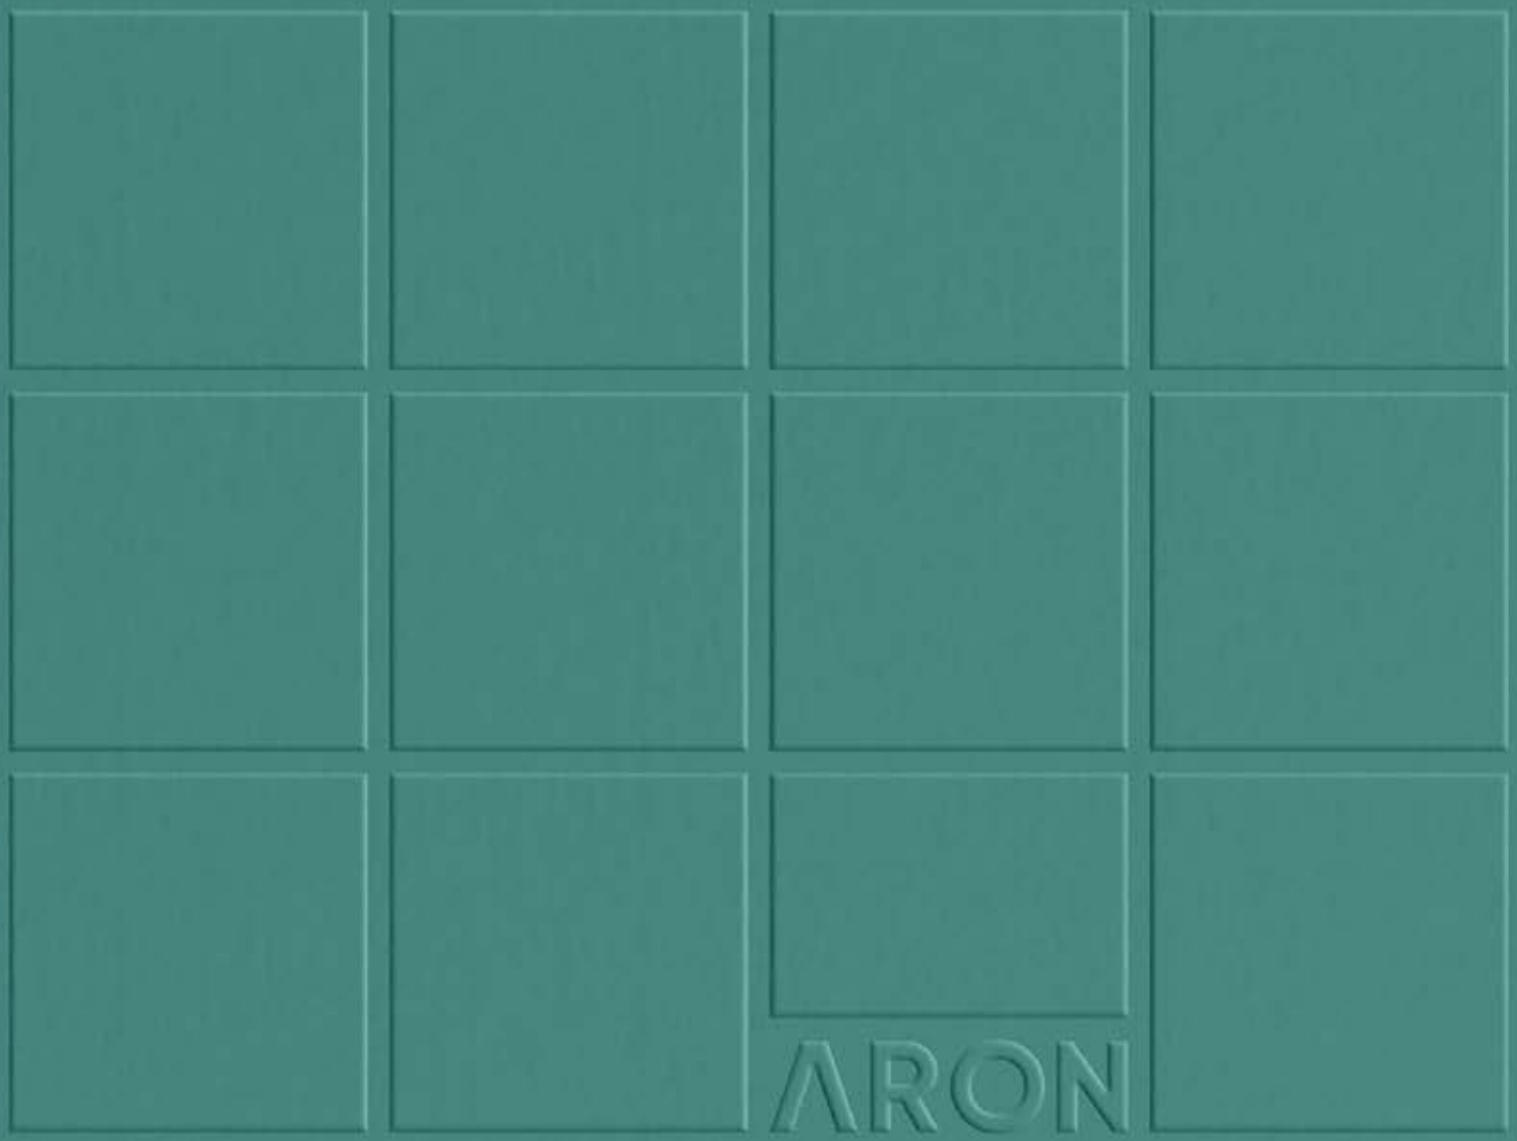

ARON

# ARON

PROFESSIONAL CATALOG

# The Light House.
# ARON

## Lighting for People.

Designing light for people is not a trend; it is a return to the essence of lighting — caring for human life, health and emotions.
For a long time, light was seen only as a technical requirement, measured in numbers and standards. But light is not experienced by spaces. It is experienced by the people who live in them.
When lighting is designed around human presence, it goes beyond compliance and begins to create comfort, balance, and a genuine sense of well-being.

Pensar a luz para as pessoas não é uma moda. É voltar ao essencial da iluminação: melhorar a forma como vivemos, trabalhamos e nos sentimos nos espaços.
Durante muitos anos, a luz foi tratada apenas como um requisito técnico, definida por valores, normas e cálculos. Mas a luz não é vivida pelos espaços — é vivida pelas pessoas.
Quando a iluminação parte da presença humana, deixa de ser apenas cumprir regras e passa a criar conforto visual, equilíbrio e uma sensação real de bem-estar no dia a dia.

**Manuel Vidigal**
Aron CEO



## About Aron

2015 BORN IN PORTUGAL

Founded in Portugal in 2015, the brand was created with a clear focus that Lighting should be simple to specify, easy to install, and strong enough to last — without losing design identity.

Aron designs and develops lighting solutions that combine clean design, reliable technology, and competitive pricing, created specifically for the needs of architects, lighting designers, and distributors.

2016 FIRST EXHIBITION IN PORTO

In 2016, we presented our first collection at an exhibition in Porto. This milestone marked our entry into the professional lighting market and the beginning of direct collaboration with market professionals.

2017-2020 PORTUGAL-SPAIN LOCAL TEAM

After establishing a strong and consistent presence in the Portuguese market, we took our first international step in 2020 by entering Spain, expanding our reach and reinforcing our ambition to grow sustainably across Europe.

## International Expansion

2022 FIRST LIGHT + BUILDING

Exhibiting at Light + Building in Frankfurt in 2022 was a defining moment, giving us visibility on a global stage and confirming our positioning within the European architectural lighting sector.

2024 LOCAL TEAM IN ITALY AND FRANCE

In 2024, we extended our presence to Italy and France, strengthening our network in two markets known for their strong design identity and high technical standards.

**+3000 Products**

**+500 Distributors**



**Founded in Lisbon, built through distribution, driven by design**

2025 EXPORT TO 20 MARKETS

Alongside our local teams in Portugal, France, Spain, and Italy, 2025 marked a major international milestone as we expanded our export network, supplying our products to more than 20 countries through trusted partners and distributors.

2026 ARCHITECTURAL PRODUCT LINE

In 2026, we will introduce a dedicated architectural product line developed through close collaboration with lighting designers. The range is based on clear geometric forms, focusing on practical performance, modularity, and reliable integration into architectural spaces, supporting a wide variety of professional lighting applications.



# Lighting Projects & Control



At Aronlight, we aim to provide the most suitable control systems for any environment. We offer both wired and wireless (RF) solutions, with the ability to integrate motion and occupancy sensors, delivering detailed technical information about the luminaires, including energy consumption and failure reports.


Our systems can operate either as standalone solutions or integrated with dedicated management platforms, available locally or remotely. Our solutions support the most advanced protocols, such as Bluetooth Mesh, Zigbee, and LoRa, among others.

Furthermore, our luminaires are compatible with the most widely used lighting control protocols, including DALI, 0–10V, Triac, and DMX.

zigbee · LoRa · DALI · 0-10V · DMX512




# Across Sectors

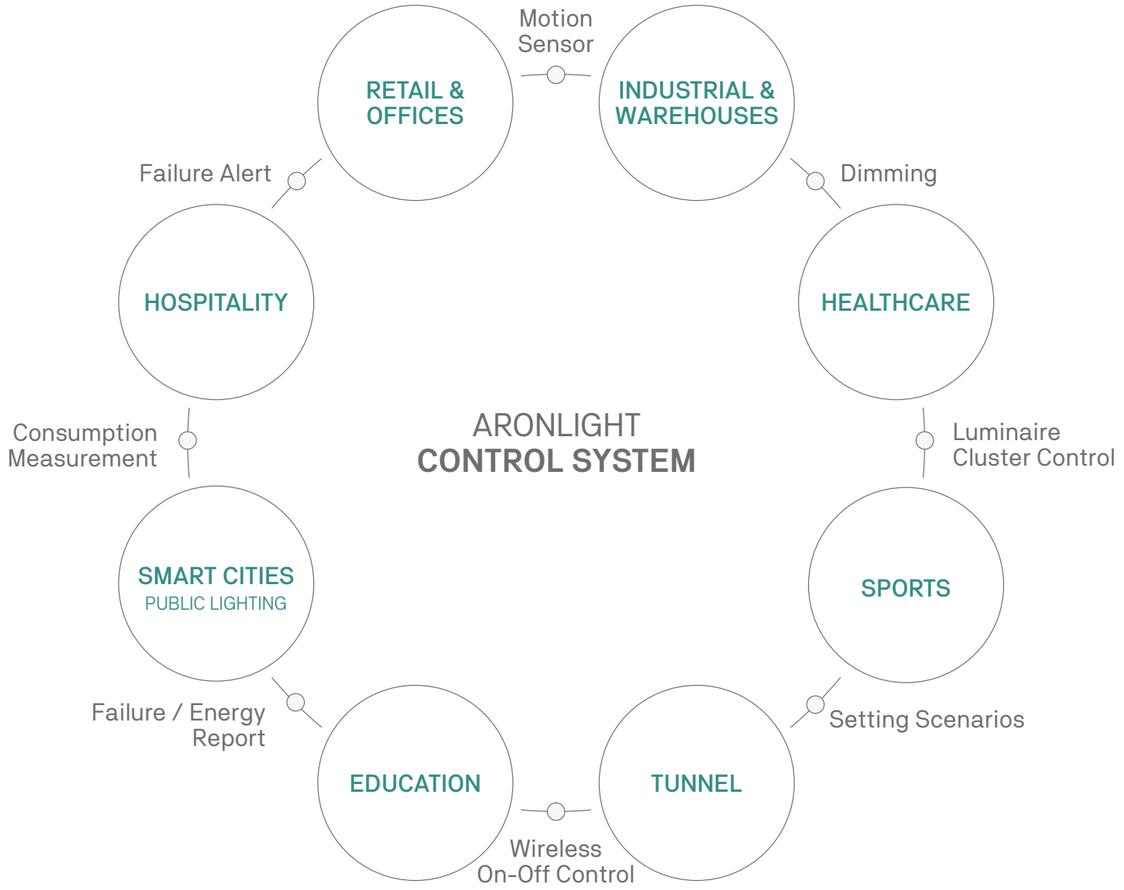

24 - 48 **INTERIOR RECESSED**


page.26
PETI


page.27
BERG TRIMLESS


page.28
GABI


page.30
BEN


page.31
LUKE



page.32
TORQ


page.33
MODULE EYE ZOOM


page.34
JACK


page.34
ROB



page.35
MATT



page.36
GLAZ



page.37
ETAN



page.38
ECO SPOTLIGHT


page.38
LUSO


page.38
ONE


page.39
VAUN


page.39
HALE


page.39
ACE


page.39
LOKI


page.40
UNA II ROUND


page.40
UNA II SQUARE


page.40
FLEXI II


page.41
STRIX


page.42
VESTA


page.43
BRIL


page.44
QUANT ONE


page.44
QUANT DOUBLE


page.44
QUANT TRIPLE


page.45
RITZ


page.45
CHIADO


page.45
JAZ ROUND


page.45
JAZ SQUARE


page.48
ROUND PANEL


page.48
SQUARE PANEL


page.48
LED PANEL BACKLIT

49 - 52 **BACKLIT LED PANEL**


page.50
BACKLIT 600X600


page.50
LYSS PRO 600X600


page.51
BACKLIT 1200X300


page.52
BOARDO SURFACE


page.52
BOARD SURFACE

53 - 57 **EDGELIT LED PANEL**


page.54
EDGELIT PRO 600X600


page.54
EDGELIT PRO 600X300


page.54
EDGELIT PRO 1200X300


page.55
EDGELIT PRO 1500X300


page.55
EDGELIT PRO 1200X600

58 - 77 **INTERIOR LINEAR LIGHT AND SUSPENSION**


page.60
LYNX LINEAR


page.61
SCHOOL WALL WASH


page.62
LINEAR MODULAR


page.63
LYNX LINEAR


page.64
LYNX EVO


page.65
LYNX SLIM


page.66
SLASH


page.67
TRACE


page.68
THANE


page.69
AURA CIRCULAR


page.70
VISTA


page.71
LUNA


page.72
OFFICE PRO V2


page.73
FIZI


page.73
PASCAL


page.74
PASCAL GU10


page.75
LUNO


page.76
VIRA


page.77
JULLE


page.77
NOVVA

78 - 93 **INTERIOR SURFACE LIGHT**


page.80
VIGG


page.81
ASH


page.81
DESMI


page.82
LEV


page.83
VIGG GU10


page.83
LEV GU10


page.83
MINI LEV GU10


page.84
PRADO GU10


page.84
NATAN


page.84
NATAN


page.84
NATAN


page.85
ROLL


page.85
LUPO WALL


page.86
TIDE


page.87
DUNA


page.88
CUBE


page.89
ALPI


page.90
FREDI


page.91
AIKA


page.92
HAIA


page.92
KIRA

94 - 109 **48V PROFESSIONAL LIGHTING**


page.98
LINEAR DOT


page.98
LINEAR DOT ROTABLE


page.101
LINEAR OPAL


page.101
CORNER OPAL


page.102
SUSPENDED BALL


page.103
SUSPENDED DROP


page.103
SUSPENDED TUBE


page.104
SPOTLIGHT


page.104
SPOTLIGHT ZOOMABLE

110 - 119 **INTERIOR TRACKLIGHT**


page.112
PRADO PRO


page.113
PRADO ZOOM


page.114
PRADO SMART


page.115
NATAN GU10


page.115
LINEA


page.118
TRUNKING LIGHT


page.119
SENA

120 - 143 **EXTERIOR WALL SURFACE**


page.122
CHUNK


page.123
CLIF


page.124
HARPE


page.125
PINE


page.125
ALDER



page.126
PARKE GU10



page.127
BAO


page.127
ABRITER


page.128
FISHER


page.129
CANA PRO


page.130
ARCO


page.131
KANE WALL


page.131
ALFA WALL


page.132
LINCE


page.132
LOG


page.133
TAKO


page.133
LYRA


page.134
AXEL



page.134
NUT


page.135
THULE


page.135
AXIS


page.136
ARI


page.136
GATE


page.137
TULIP

120 - 143 **EXTERIOR WALL SURFACE**


page.137
ELM


page.138
STUDE


page.139
ARLO


page.139
ST53KH LUMINAIRE


page.139
NORA


page.140
PHIL


page.140
FENIX


page.140
NOA


page.141
CANA


page.141
IVY


page.141
HANA


page.141
INDIGO


page.142
AVENCA


page.142
CARMO


page.143
ASTER


page.143
JADE


page.143
HERA

144 - 159 **EXTERIOR RECESSED**


page.146
NIXEN


page.146
LEIA


page.147
VOXEL


page.147
VITA


page.148
CUADRADO


page.148
CEDAR


page.149
SKILL


page.150
SPOTLIGHT


page.151
MELLER


page.152
MELLER II


page.153
PINI


page.154
SLIT


page.155
KATA


page.156
VINI


page.156
KARI


page.157
OTTO


page.157
OAK


page.158
JOCKA


page.159
OTTO ROTABLE


page.159
ABBA


page.159
INGROUND SYS-RD

160 - 177 **EXTERIOR SPOTS AND BOLLARDS**


page.162
LUPO


page.162
GARDEN LIGHT FUTC11


page.163
HAZEL


page.163
SAGE


page.163
AGAVE GU10


page.164
AGAVE SMD

160 - 177 EXTERIOR SPOTS AND BOLLARDS


page.164
SIG


page.165
VALL II


page.165
VALL


page.166
PULSE


page.167
MARI


page.168
PIRI


page.169
SHIRA


page.169
ALFA


page.170
KANE


page.170
SLOT


page.171
BOLLARD BERY


page.171
SINTRA


page.172
TERY


page.173
DOT


page.173
LIV


page.174
ARCHI


page.175
JEDAI


page.175
CALY


page.176
CIMA SLOT


page.176
CIMA CALY


page.177
CIMA NERO

178 - 179 UNDERWATER LIGHT


page.179
UNDERWATER UW03


page.179
POOL LIGHT



page.179
POOL LIGHT

180 - 187 EXTERIOR FACADE LIGHTING



page.182
GARDEN LIGHT


page.183
LINEAR WALL WASHER


page.184
WALL WASHER RL5-24


page.185
ARC MINI


page.185
ARC COMBI


page.185
ARC PRO


page.186
ARC COLOSSUS


page.186
ARC LINE


page.186
ARC LINE RECESSED


page.187
PILENE






188 - 191 WORKLIGHT CONSTRUCTION LIGHTING


page.190
POCKET PROJECTOR


page.190
WORKLIGHT BOLD


page.190
WORK LED STRIP


page.191
STRING PROJECTOR

192 - 204 SOLAR GARDEN


page.194
BLOK


page.194
KOY


page.195
ZUN


page.196
MARLO


page.197
NATAN


page.198
BIRK


page.199
FLOOD SOLAR PRO II


page.200
FLOX


page.200
LEO


page.200
SABI


page.201
LOTUS


page.201
BOLLARD


page.202
MOSS


page.203
PLUTO


page.204
RUN

205 - 209 PLAFON LIGHTING


page.206
LIA


page.206
CALISTO


page.206
MIRANDA 3CCT


page.207
LEVI


page.207
GLENDA


page.208
DÁLIA


page.208
MOON


page.208
MARS


page.208
HALF MOON


page.208
HALF MARS


page.208
LARA


page.209
RUMU

210 - 219 INTERIOR BATTENS


page.212
SEAM


page.212
MEGALISM


page.213
CABINET T5 ROTABLE


page.214
T5 PRO


page.214
KAYA


page.215
BOX T8


page.215
ARMADURA T8


page.215
RÉGUAS T8


page.216
SMD


page.216
NEXOR


page.217
TITAN


page.218
INTEL TRI-PROOF

210 - 219 **INTERIOR BATTENS**


page.219
DURA TERMAX


page.219
DURA PRO - HACCP

220 - 229 **FLOODLIGHT PROJECTORS**



page.222
SPECTRA 3CCT


page.222
SPECTRA SENSOR


page.224
PROJECTOR SLIM


page.224
POLYCARBONATE


page.225
BLAZE


page.225
MASTER PRO


page.226
ASTRO EVO


page.226
PADELITE ECO


page.227
PADELITE PRO


page.228
TECH PRO


page.228
ULTRAMAX


page.229
TECH DIMMABLE


page.229
TECH II DIMÁVEL

230 - 237 **INDUSTRIAL LIGHTING**


page.232
MASTER DIMMABLE


page.232
MASTER II 3CCT


page.233
TECH EVO


page.234
COBALT


page.234
TECH


page.234
DOB ECO


page.235
HIGH TEMPERATURE


page.235
SIRIUS


page.236
LINEAR LUMIA


page.237
GAS STATION PRO

238 - 251 **STREET LIGHT**



page.240
VERSATILE


page.241
NEXA


page.242
ZINI



page.243
ARIES



page.244
EXCELSIOR


page.244
ORBIT


page.244
BALLON


page.245
LUCCI


page.246
VILLA



page.246
FERNANDINA



page.246
RETROFIT KIT


page.247
CONVERT

238 - 251 **STREET LIGHT**


page.248
URBAN DESIGN II


page.249
URBAN PRO


page.250
URBAN EMMA


page.251
URBAN ECO

252 - 255 **SOLAR STREET LIGHTING**


page.254
LEAN SOLAR


page.254
SQUARE SOLAR


page.255
HEKOS SOLAR


page.255
TABITI SOLAR

256 - 259 **ATEX LIGHTING**


page.257
ATEX LINEARTOP


page.258
ATEX HIGHTOP


page.258
ATEX EMERGENCY


page.259
ATEX FLOODTOP

260 - 275 **MOTION DETECTORS**


page.262
ST02


page.262
ST31


page.262
ST31C


page.262
ST32


page.263
ST754


page.263
ST11


page.263
MOTION SENSOR


page.263
ST09


page.264
ST18B


page.264
AR18X


page.264
ST15


page.264
ST701E


page.265
MICROWAVE / PRESENCE


page.265
SENSOR PHOTOCELL


page.265
ST24 DIP SWITCH


page.265
ST302


page.265
ST330 1-10V


page.266
ST40


page.266
ST41


page.266
AR41


page.267
ST753


page.267
ST40A


page.267
ST331 1-10V


page.267
ST41H


page.268
INFRARED PRESENCE


page.268
LONG RANGE


page.268
ST42C



page.268
ST05DA3 DALI


page.269
ST05DA1 DALI


page.269
ST759


260 - 275 **MOTION DETECTORS**


page.269
LONG RANGE


page.269
ST05A


page.270
MICROWAVE PRESENCE


page.270
MICROWAVE LONG RANGE


page.270
INFRARED PRESENCE


page.270
INFRARED


page.271
ST05L


page.271
AR46X/G


page.271
ST07B


page.272
ST705A


page.272
LED PANEL WITH SENSOR


page.272
PLAFON WITH SENSOR


page.272
LUMINAIRE WITH SENSOR


page.273
PLAFON WITH SENSOR


page.273
WALL LUMINAIRE


page.273
WALL LUMINAIRE


page.273
WALL LUMINAIRE


page.274
WALL LUMINAIRE


page.274
WALL LUMINAIRE


page.274
BULB WITH SENSOR

276 - 285 **EMERGENCY LIGHTING**


page.278
SAFELUX


page.278
SAFELUX DOUBLE


page.279
EASYLUX II


page.279
DUOLUX


page.280
LONGLUX


page.281
POWERLUX


page.281
POWERLUX SLIM


page.282
DOTLUX


page.282
DOTLUX PRO


page.282
EMERGENCY PROJECTOR


page.283
SIGLUX 5-IN-1

286 - 289 **HORTICULTURE**


page.288
HORTI GREEN


page.288
HORTI FRAME MARS


page.288
HORTI HYDRO MASTER TUBE



page.289
HORTI CHROME 4



page.289
HORTI UV-PRO

290 - 295 **FITTING GU10 AROS**


page.291
MACH SQUARE


page.291
MACH ROUND


page.291
ROUND


page.291
MACH SQUARE V2


page.291
MACH ROUND V2


page.291
MACH SQUARE

290 - 295 **FITTING GU10 AROS**


page.292
MACH ROUND


page.292
ROUND


page.292
SQUARE


page.292
MACH ROUND TRIMLESS


page.292
HALE


page.293
MACH SQUARE


page.293
MACH ROUND


page.293
SQUARE


page.293
ROUND

296 - 305 **LAMPS TUBES**


page.297
GU10 120°


page.297
GU10 38°


page.297
GU10 DIMMABLE


page.297
MODULE


page.297
MODULE DIMMABLE


page.298
G4 / G9


page.298
CANDLE


page.298
G45


page.298
A60


page.299
A60 SMOKY


page.299
A60 GOLD/SILVER


page.299
A100


page.299
G95 GLOBO


page.299
G95 GLOBO GOLD/SILVER


page.300
G125 CRISTAL / AMBER


page.300
ST64


page.300
ST64 DECO


page.300
G125 DECO DIMMABLE


page.300
G125 CRYSTAL


page.301
DECO DIMMABLE


page.301
G95 SMOKY DIMMABLE


page.301
E14 CLASSIC


page.301
G45 CLASSIC


page.302
E27 CLASSIC


page.302
GLOBO A120


page.302
BIG


page.303
SUPER ARON


page.303
VERSUS


page.303
KORN


page.304
T8 3CCT 120LM/W 1 SIDE


page.304
T8 TECNIC PRO 130LM/W


page.304
T8 EVO 160LM/W 1 SIDE


page.304
T8 HIGH-LUMEN


page.305
T8 STANDARD 2 SIDES


page.305
T8 STANDARD 1 SIDE


page.305
T5 STANDARD 2 SIDES

306 - 309 **LED STRIP 230V**


page.308
SLIMSTRIP 230V


page.308
PROSTRIP 230V IP65


page.309
PROJECT STRIP 230V


page.309
COB 230V

310 - 324 **LED STRIP 24V**


page.311
STANDARD SMD 24V



page.312
PROSTRIP SMD 24V


page.313
SUPER LONG PROSTRIP


page.314
HIGH LUMEN 24V


page.315
FREE CUT SMD 24V


page.316
SLIM SMD 24V


page.316
LARGE SMD 24V


page.317
COB 24V


page.318
COB 24V


page.319
FREE CUT COB 24V


page.319
COB SLIM 24V


page.320
COB LARGE 24V


page.320
SMD CCT CHANGE 24V


page.320
CSP CCT TUNABLE 24V


page.321
PROSTRIP SMD RGB 24V


page.321
COB RGB 24V


page.322
SMD RGBW 24V


page.322
COB PRO RGBW (4000K)


page.323
SMD RGB+CCT 24V


page.324
COB RGB+CCT 24V

325 - 329 **SPECIAL LED STRIP 24V**


page.326
EXTRA WARM 24V


page.327
ZIGUEZAGUE 24V


page.327
SIDEVIEW 24V


page.327
DIM TO WARM 24V


page.328
SAUNA 24V


page.329
SPI DIGITAL COB/SMD

330 - 336 **NEON TUBES**


page.331
TUBO NEON 360°


page.331
TUBO NEON 160°



page.332
NEON WALL WASHER


page.332
MODULAR WALL WASHER



page.333
NEON 16X16 24V


page.334
NEON SIDE VIEW 10X18


page.335
NEON SIDE VIEW 10X18


page.335
NEON TOP VIEW 06X06


page.336
NEON SIDE VIEW 03X08


page.336
NEON PISCINA 24V





337 - 338 **CONTROLLERS WIRELESS (RF)**


page.338
KIT 2 IN 1 SINGLE COLOR


page.338
KIT 3 IN 1


page.338
2 IN 1-1 COLOR/CCT


page.338
3 IN 1


page.338
5 IN 1


page.338
FAST 2 IN 1-1 COLOR/CCT


page.338
FAST 3 IN 1


page. 338
1 COLOR


page. 338
PANEL 1 COLOR


page.338
PANEL CCT


page.338
PANEL 3 IN 1


page.338
DIN 1 COLOR


page.338
MODULE TRIAC+PUSH


page.338
MODULE TRIAC+PUSH


page.338
1 COLOR HIGH VOLTAGE


page.338
CCT HIGH VOLTAGE


page.338
RGB HIGH VOLTAGE


page.338
GATEWAY WIRELESS

339 - 339 **CONTROLLERS WIRELESS + WIFI**


page.339
2 IN 1-1 COLOR/CCT


page339
5 IN 1


page.339
FAST 2 IN 1-1 COLOR/CCT


page.339
FAST 3 IN 1


page.339
5 IN 1


page. 339
5 IN 1


page.339
5 IN 1


page.339
1 COLOR POWER SUPPLY


page.339
RGB + CCT


page.339
RGBW


page.339
1 COLOR


page.339
CONTROLLER 5 IN 1


page. 339
MODULE TRIAC+PUSH


page.339
MODULE TRIAC+PUSH

339 - 340 **CONTROLLERS WIRELESS + ZIGBEE**


page.339
2 IN 1-1 COLOR/CCT


page.339
3 IN 1


page.339
5 IN 1


page.339
FAST 2 IN 1


page.339
FAST 3 IN 1


page.340
5 IN 1


page.340
MODULE TRIAC+PUSH


page.340
MODULE TRIAC+PUSH


page.340
GATEWAY ZIGBEE

341 - 341 **CONTROLLERS WIRELESS**


page.341
REMOTE 1 COLOR


page.341
REMOTE CCT


page.341
REMOTE CCT


page.341
REMOTE 1 COLOR


page.341
REMOTE 1 COLOR/CCT


page.341
REMOTE RGB/RGBW


page.341
PANEL RGB+CCT


page.341
PANEL 1 COLOR 4 ZONES


page.341
PANEL CCT 4 ZONES


page.341
PANEL RGBW 4 ZONES


page.341
PANEL RGBW 4 ZONES


page.341
PANEL RGB+CCT 4 ZONES


page.341
PANEL RGBW 4 ZONES


page.341
PANEL RGB+CCT 8 ZONES


page.341
PANEL 4 ZONES


page.341
CCT (ROTATE) 4 ZONES


page.341
DIMMING & CCT CHANGE


page.341
RGB+CCT 433MHZ

342 - 344 **OTHER CONTROLLERS**


page.342
PIXEL/SPI RGB/RGBW


page.342
REMOTE PIXEL/SPI RGB


page.342
REMOTE WIRELESS


page.342
CONTROLLER SPI


page.342
REMOTE WIRELESS


page.342
CONTROLLER STAIR


page.342
MODULE 0-10V/1-10V


page.343
REGULATOR PANEL


page.343
PANEL RF&0/1-10V 4


page.343
GATEWAY


page.343
PIR SENSOR (120°)


page.343
5 IN 1


page.343
MODULE DALI&PUSH


page.343
PAINEL REGULADOR


page.343
MODULE DALI&PUSH


page.343
MODULE ESTORES


page.344
CONVERTER 1-10V


page.344
DISJUNTOR WIFI

344 - 344 **DALI/DMX**


page.344
CONTROLLER MASTER


page.344
CONTROLLER MASTER


page.344
CONTROLLER MASTER


page.344
1 COLOR


page.344
RGB DMX512


page.344
RGBW DMX512


page.344
RGB+CCT

345 - 348 **POWER SUPPLY**


page.346
POWER SUPPLY 12V


page.346
POWER SUPPLY 24V


page.346
DIMMABLE TRIAC 0-10V


page.346
POWER SUPPLY 24V IP67


page.346
POWER SUPPLY SERIE M


page.347
ARON PRO LINEAR


page.347
ARON PRO


page.347
ARON PRO DALI


page.347
ARON PRO TRIAC


page.348
POWER SUPPLY IP20


page.348
POWER SUPPLY IP67

349 - 353 **LED PROFILE**


page.350
ALUMINIUM/OPAL


page.350
ALUMINIUM/OPAL


page.350
ALUMINIUM/OPAL


page.350
ALUMINIUM/OPAL


page.350
ALUMINIUM/OPAL


page.350
ALUMINIUM/OPAL


page.350
ALUMINIUM/OPAL


page.350
ALUMINIUM/OPAL


page.350
ALUMINIUM/OPAL


page.350
“U” ALUMINIUM/OPAL


page.351
ALUMINIUM/OPAL


page.351
ALUMINIUM/OPAL


page.351
ALUMINIUM/OPAL


page.351
ALUMINIUM/OPAL


page.3451
ALUMINIUM/OPAL


page.351
ALUMINIUM/OPAL


page.351
ALUMINIUM/OPAL


page.351
ALUMINIUM/OPAL


page.351
“U” ALUMINIUM/OPAL


page.351
ALUMINIUM/OPAL


page.351
ALUMINIUM/OPAL


page.351
ALUMINIUM/OPAL


page.351
ALUMINIUM/OPAL


page.351
ALUMINIUM/OPAL


page.352
ALUMINIUM ROUND


page.352
ALUMINIUM SQUARE


page.352
FLEXIBLE


page.352
TUBE ROUND


page.352
BASEBOARD




# INTERIOR

## RECESSED

**ALL LIGHTING SOLUTIONS**


## PETI












| Voltage | Body Material | Beam Angle | UGR | Dimmable | IP | Mounting Type |
|---|---|---|---|---|---|---|
| 220-240V | Aluminium | 40° | <15 | TRIAC | IP65 Front<br>IP40 Back | Recessed |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 5W | 3CCT 2700K-3000K-4000K | 400lm | White<br>Black | ILAR-02385<br>ILAR-02386 |



## BERG TRIMLESS



S


M





| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 200-240V | Aluminium | 24° | IP20 | Trimless Recessed |


| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 5W | 2700K | 425lm | White RAL 9016 | ILAR-00172 |
| 9W | 2700K | 765lm | White RAL 9016 | ILAR-00173 |

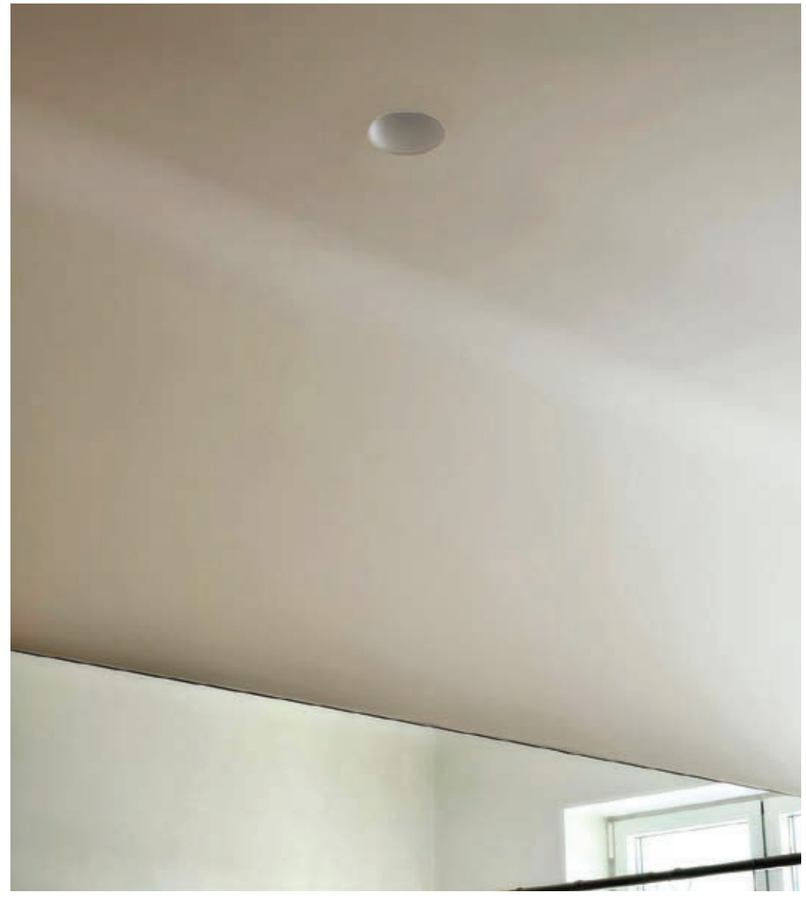

## GABI

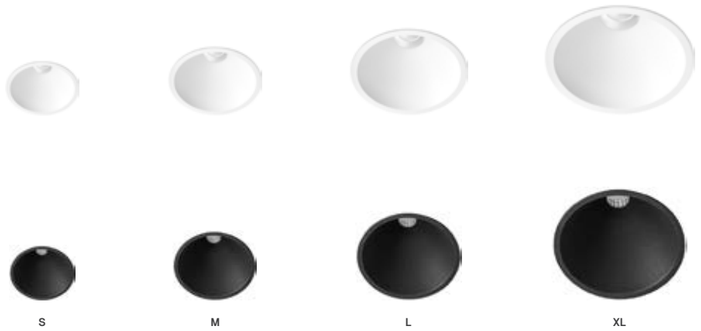


### SIZE

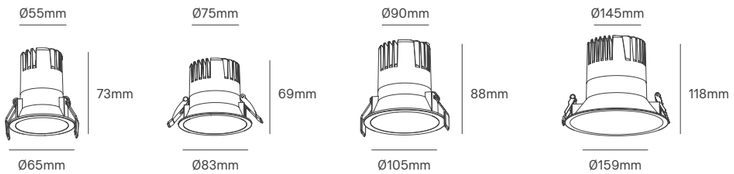


| Voltage | Body Material | Beam Angle | IP | Dimmable | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | Aluminium | 38°-60° | IP54 Front<br>IP40 Back | Triac | Recessed |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Cut-out | Beam Angle | Housing Colour | SKU |
|---|---|---|---|---|---|---|---|
| 5W | 3CCT 2700K-3200K-4000K | 400lm | Ø65x73mm | Ø55mm | 38° | White | ILAR-03699 |
| | | 300lm | | | 38° | Black | ILAR-03709 |
| 10W | 3CCT 2700K-3200K-4000K | 830lm | Ø83x69mm | Ø75mm | 38° | White | ILAR-03722 |
| | | 757lm | | | 38° | Black | ILAR-03725 |
| | | 779lm | | | 60° | White | ILAR-03700 |
| | | 700lm | | | 60° | Black | ILAR-03710 |
| 15W | 3CCT 2700K-3200K-4000K | 1092lm | Ø105x88mm | Ø90mm | 38° | White | ILAR-03723 |
| | | 980lm | | | 38° | Black | ILAR-03726 |
| | | 1735lm | | | 60° | White | ILAR-03701 |
| | | 978lm | | | 60° | Black | ILAR-03711 |
| 30W | 3CCT 2700K-3200K-4000K | 2532lm | Ø159x118mm | Ø145mm | 38° | White | ILAR-03724 |
| | | 2091lm | | | 38° | Black | ILAR-03727 |
| | | 2520lm | | | 60° | White | ILAR-03702 |
| | | 2283lm | | | 60° | Black | ILAR-03712 |





## BEN





+



+







Base
ILAR-02396


Lenses
15° - ILAR-02637
24° - ILAR-02397
36° - ILAR-02398
60° - ILAR-02399

White
ILAR-02400
Black
ILAR-02401

Trimless - White
ILAR-02714

Honeycomb/Black
ILAR-02404

KIT IP65
ILAR-02638
(Not rotable
after installation)





| Voltage | Body Material | Beam Angle | UGR | Dimmable | IP | Mounting Type | Rotable |
|---|---|---|---|---|---|---|---|
| 220-240V | Aluminium | 15° | <19 | TRIAC | IP20 | Recessed | Yes |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour |
|---|---|---|---|
| 10W | 3CCT 2700K-<br>3000K-4000K | 850lm | Black |



## LUKE






| Voltage | Body Material | Beam Angle | UGR | Dimmable | IP | Mounting Type |
|---|---|---|---|---|---|---|
| 220-240V | Aluminium | 40° | <19 | TRIAC | IP65 Front<br>IP40 Back | Recessed |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | SKU |
|---|---|---|---|
| 10W | 3CCT 2700K-<br>3000K-4000K | 850lm | ILAR-02405 |

**Mandatory Options (Not included)**



Black/Black
ILAR-02406



Black/White
ILAR-02407



Black/Grey
ILAR-02408



Black/Golden
ILAR-02409



White/White
ILAR-02410



White/Black
ILAR-02411



White/Grey
ILAR-02412



White/Golden
ILAR-02413



## TORQ




FIXED





ROTABLE



DEEP




| Voltage | Body Material | Beam Angle | UGR | IP | Dimmable | Mounting Type |
|---|---|---|---|---|---|---|
| 220-240V | Aluminium | 60° | <22 | IP65 Front<br>IP40 Back | Triac | Recessed |


| Model | Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Cut-out | Housing Colour | SKU |
|---|---|---|---|---|---|---|---|
| Fixed | 8W | 3CCT 2700K- | 700lm | Ø80x40mm | Ø68mm | White RAL 9016 | ILAR-03677 |
| Rotable | 8W | 3000K-4000K | 700lm | Ø80x40mm | Ø68mm | White RAL 9016 | ILAR-03676 |
| Deep | 8W | | 700lm | Ø80x55mm | Ø68mm | White RAL 9016 | ILAR-03678 |





## MODULE EYE ZOOM






| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminium | 18°-26°-36°-50° | IP20 | Recessed |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| Switch 4W-6W-8W | 3CCT 2700K-3000K-4000K | 750lm | White | ILAR-02964 |
| Switch 7W-9W-11W | 3CCT 2700K-3000K-4000K | 900lm | White | ILAR-02837 |

*Compatible with all GU10 Fitting


**Options (Not included)**



Circular Ring
White
ILAR-03048



Square Ring
White
ILAR-03049



Honeycomb Circular
White
ILAR-03050




Spring Kit

ILAR-03051



## JACK






| Voltage | Body Material | Beam Angle | Dimmable | IP | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | Aluminium | 60° | TRIAC | IP65 Front<br>IP40 Back | Recessed |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 6W | 2CCT 3000K-4000K | 680lm | Black | ILAR-02419 |


**Mandatory Options (Not included)**



| Black<br>ILAR-02420 | Chrome<br>ILAR-02421 | Brushed Steel<br>ILAR-02422 | White<br>ILAR-02423 | Black<br>ILAR-02424 | Chrome<br>ILAR-02425 | Brushed Steel<br>ILAR-02426 | White<br>ILAR-02427 |
|---|---|---|---|---|---|---|---|

## ROB








| Voltage | Body Material | Beam Angle | Dimmable | IP | Mounting Type | Rotable |
|---|---|---|---|---|---|---|
| 220-240V | Aluminium | 60° | TRIAC | IP65 Front<br>IP40 Back | Recessed | Yes |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 7W | 2CCT 3000K- 4000K | 675lm | Black | ILAR-02387 |

**Mandatory Options (Not included)**




| Brushed Steel<br>ILAR-02388 | White<br>ILAR-02389 | Black<br>ILAR-02390 | Chrome<br>ILAR-02391 | Brushed Steel<br>ILAR-02392 | White<br>ILAR-02393 | Black<br>ILAR-02394 | Chrome<br>ILAR-02395 |
|---|---|---|---|---|---|---|---|



## MATT







| Voltage | Body Material | Beam Angle | Dimmable | IP | Mounting Type | Rotable |
|---|---|---|---|---|---|---|
| 220-240V | Aluminium | 360° | TRIAC | IP65 Front<br>IP40 Back | Recessed | Yes |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 6W | 4CCT 2700K-3000K-4000K-6000K | 680lm | Black | ILAR-02414 |

**Options (Not included)**



| Black<br>ILAR-02415 | White<br>ILAR-02416 | Brushed Steel<br>ILAR-02417 | Chrome<br>ILAR-02418 |
|---|---|---|---|

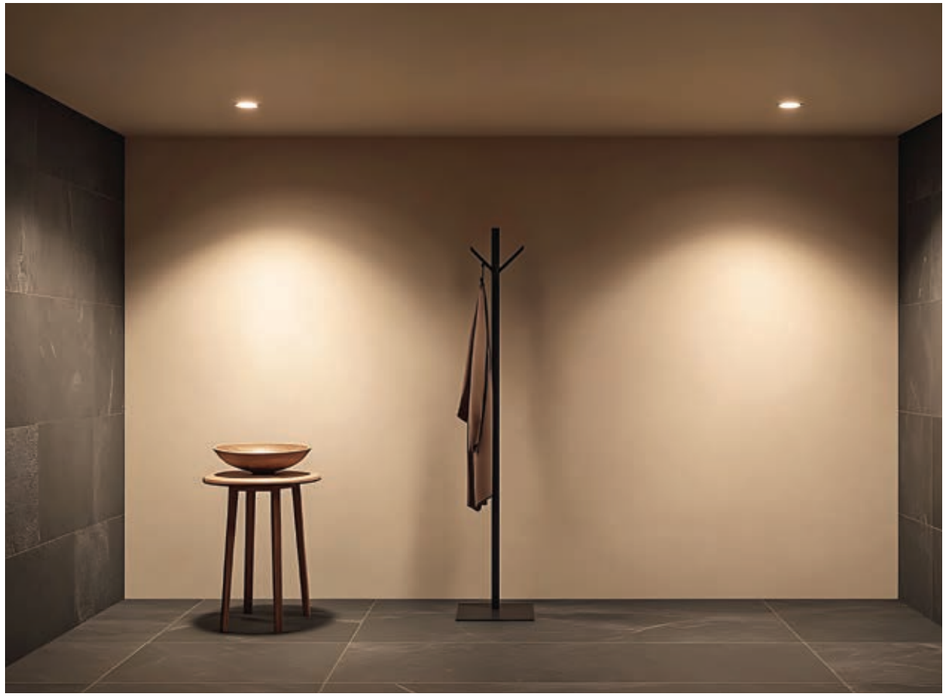


## GLAZ











| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Die Cast Aluminium | 25° | IP67 | Recessed |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 4.6W | 3000K | 446lm | Black | ILAR-02239 |
| | | | White | ILAR-02240 |




## ETAN







| Voltage | Body Material | Beam Angle | IP | Mounting Type | Rotable |
|---|---|---|---|---|---|
| 220-240V | Aluminium+PC | 38° | IP40 | Recessed | Yes |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 20W | 2700K | 1600lm | White RAL 9016 | ILAR-01945 |
| | 4000K | 1600lm | White RAL 9016 | ILAR-01578 |

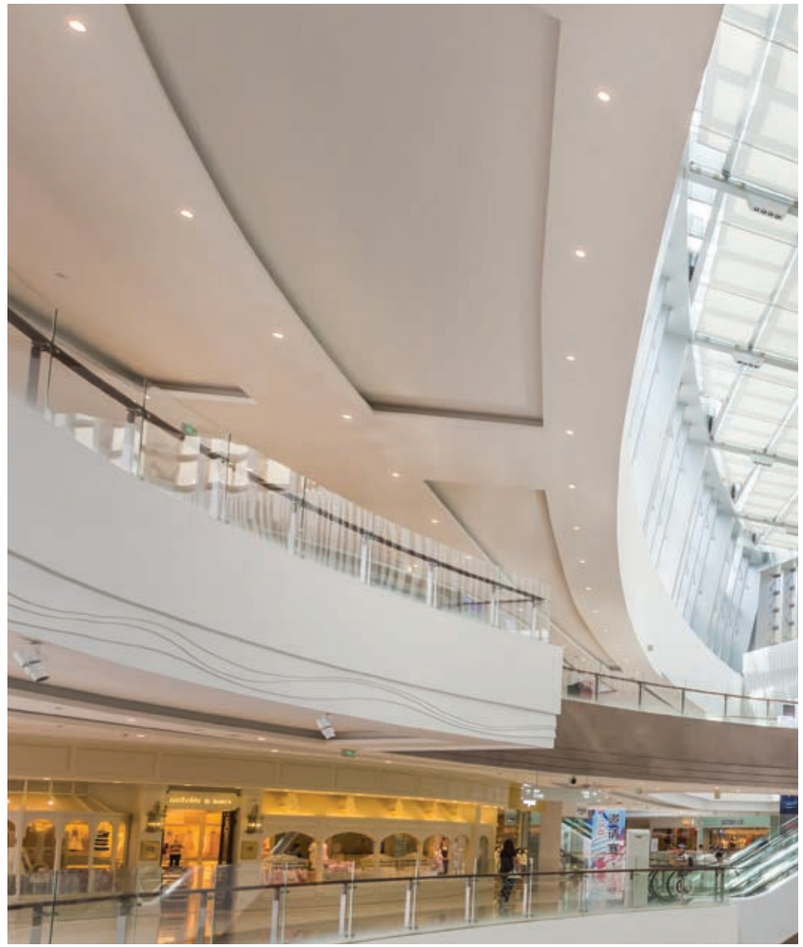

## ECO SPOTLIGHT







| Voltage | Body Material | Beam Angle | IP | Mounting Type | Rotable |
|---|---|---|---|---|---|
| 220-240V | PVC | 38° | IP44 Front<br>IP20 Back | Recessed | Yes |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 7W | 3000K | 650lm | White | ILAR-00556 |
| | 4000K | 670lm | White | ILAR-00557 |
| | 6500K | 700lm | White | ILAR-00558 |

## LUSO







| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminium | 60° | IP65 Front<br>IP20 Back | Recessed |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 8W | 2700K | 815lm | White RAL 9016 | ILAR-01108 |

## ONE






| Voltage | Body Material | Beam Angle | IP | Mounting Type | Rotable |
|---|---|---|---|---|---|
| 220-240V | Aluminium | 60° | IP65 Front<br>IP20 Back | Recessed | Yes |


| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 8W | 3000K | 815lm | White RAL 9016 | ILAR-01027 |



## DOWNLIGHTS


**VAUN**







**HALE**






**ACE**







| Voltage | Body Material | Beam Angle | IP | Mounting Type | Rotable |
|---|---|---|---|---|---|
| 220-240V | Aluminium | 36° | IP40 Front<br>IP20 Back | Recessed | Yes |

| Model | Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|---|
| VAUN | 10W | 2700K | 870lm | White RAL 9016 | ILAR-00656 |
| | | 4000K | 950lm | | ILAR-00657 |
| HALE | 10W | 2700K | 850lm | | ILAR-00659 |
| | | 4000K | 850lm | | ILAR-00660 |
| ACE | 10W | 2700K | 870lm | | ILAR-00662 |
| | | 4000K | 950lm | | ILAR-00663 |

## LOKI






| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 200-240V | Aluminium+PC | 60° | IP54 Front<br>IP20 Back | Recessed |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 8W | 2700K | 750lm | White RAL 9016 | ILAR-00994 |
| | 4000K | 800lm | White RAL 9016 | ILAR-00995 |


## UNA II ROUND / SQUARE






**SIZE**

Round




Square





| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminium+PC | 90° | IP65 Front Round / IP40 Back<br>IP44 Front Square / IP40 Back | Recessed |

| Model | Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Dimmable | Housing Colour | SKU |
|---|---|---|---|---|---|---|
| Round | 25W | 3CCT 3000K-4000K-5700K | 2900-3200lm | TRIAC | White RAL 9016 | ILAR-00708 |
| Round | 10W | 3CCT 3000K- 4000K-5000K | 1050lm | NO | | ILAR-01570 |
| Round | 15W | | 1650lm | NO | | ILAR-01571 |
| Round | 18W | | 2160lm | NO | | ILAR-01572 |
| Round | 25W | | 3000lm | NO | | ILAR-01573 |
| Square | 10W | 3CCT 3000K- 4000K-5000K | 1200lm | NO | | ILAR-03065 |
| Square | 20W | | 2400lm | NO | | ILAR-03066 |
| Square | 36W | | 4320lm | NO | | ILAR-03067 |

## FLEXI II








| Voltage | Body Material | Beam Angle | UGR | IP | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | Aluminium+PC | 120° | <19 | IP54 Front<br>IP40 Back | Recessed |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Cut-out | Housing Colour | SKU |
|---|---|---|---|---|---|---|
| 7W | 3CCT 3000K- | 840lm | Ø110x25mm | Ø75-95mm | White RAL 9016 | ILAR-02243 |
| 12W | 4000K-5700K | 1620lm | Ø145x30mm | Ø120-135mm | | ILAR-02244 |
| 18W | | 2520lm | Ø195x39mm | Ø165-185mm | | ILAR-02245 |
| 24W | | 3360lm | Ø230x39mm | Ø205-220mm | | ILAR-02246 |

**Options (Not included)**



Surface KIT - D110
Ø114x70mm
ILAR-02346



Surface KIT - D145
Ø149x75mm
ILAR-02347




Surface KIT - D195
Ø199x75mm
ILAR-02348



## STRIX




**SIZE**




| Voltage | Body Material | Beam Angle | UGR | IP | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | ADC12+PC+PMMA | 55° | <16 | IP65 Front<br>IP40 Back | Recessed |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Cut-out | Housing Colour | SKU |
|---|---|---|---|---|---|---|
| 12W | 3CCT 3000K- | 1440lm | Ø110x50mm | Ø95mm | White | ILAR-02352 |
| 20W | 4000K-5700K | 2400lm | Ø140x57mm | Ø125mm | | ILAR-02353 |
| 24W | | 2880lm | Ø165x60mm | Ø150mm | | ILAR-02354 |
| 36W | | 4320lm | Ø220x66.5mm | Ø200mm | | ILAR-02355 |

**Options (Not included)**



Black Ring
D110 - ILAR-02356
D140 - ILAR-02359
D165 - ILAR-02362
D220 - ILAR-02365



Chrome Ring
D110 - ILAR-02357
D140 - ILAR-02360
D165 - ILAR-02363
D220 - ILAR-02366



Golden Ring
D110 - ILAR-02358
D140 - ILAR-02361
D165 - ILAR-02364
D220 - ILAR-02367

# VESTA

2 BASE MODULES, 1 SIZE



**2 BASES**
**15W/20W I 26W/35W**
**Ø116mm**

DIFFERENT REFLECTOR SIZES



**Ø190** **Ø230** **Ø285** **Ø305**

ONE PRODUCT



**BASE SIZE**



46mm

Ø116mm

| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminium | 90° | IP54 Front<br>IP40 Back | Recessed |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Housing Colour | SKU |
|---|---|---|---|---|---|
| 15/20W | 3CCT 3000K-4000K-5700K | Max. 2400lm | Ø116mm | White RAL 9016 | ILAR-03599 |
| 26/35W | | Max. 4200lm | Ø116mm | | ILAR-03600 |

**Mandatory Options (Not included)**



Reflector D190x51mm
Cut-out: 165-175mm
ILAR-03601

Reflector D230x56mm
Cut-out: 200-215mm
ILAR-03602

Reflector D285x60mm
Cut-out: 245-270mm
ILAR-03603

Reflector D305x69mm
Cut-out: 270-290mm
ILAR-03604



# BRIL



**S** **M** **L** **XL**

**SIZE**




| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminum | 60° | IP54 Front<br>IP40 Back | Recessed |


| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Cut-out | Housing Colour | SKU |
|---|---|---|---|---|---|---|
| 10W | 3000K | 1150lm | Ø110x53mm | Ø90-95mm | White RAL 9016 | ILAR-02210 |
| | 4000K | 1250lm | | | | ILAR-02211 |
| 18W | 3000K | 2150lm | Ø145x65mm | Ø120-130mm | | ILAR-02212 |
| | 4000K | 2250lm | | | | ILAR-02213 |
| 25W | 3000K | 3025lm | Ø190x75mm | Ø160-170mm | | ILAR-02214 |
| | 4000K | 3125lm | | | | ILAR-02215 |
| 30W | 3000K | 3800lm | Ø225x87mm | Ø200-210mm | | ILAR-02216 |
| | 4000K | 3900lm | | | | ILAR-02217 |
| 42W | 4000K | 4620lm | Ø225x87mm | Ø200-210mm | | ILAR-01843 |

## QUANT




### ONE







### DOUBLE






### TRIPLE







| Voltage | Body Material | Beam Angle | IP | Mounting Type | Rotable |
|---|---|---|---|---|---|
| 220-240V | Aluminium | 36° | IP20 | Recessed | Yes / 360° |

| Model | Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|---|
| ONE | 30W | 3CCT 3000K-4000K-5000K | 3000lm | White | ILAR-02750 |
| | | | | Black | ILAR-02751 |
| DOUBLE | 60W | 3CCT 3000K-4000K-5000K | 6200lm | White | ILAR-02748 |
| | | | | Black | ILAR-02749 |
| TRIPLE | 90W | 3CCT 3000K-4000K-5000K | 9270lm | White | ILAR-02752 |
| | | | | Black | ILAR-02753 |



## RITZ







| Voltage | Body Material | Beam Angle | IP | Mounting Type | Rotable |
|---|---|---|---|---|---|
| 220-240V | Aluminium | 36° | IP20 | Recessed | Yes |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 35W | 3CCT 3000K-<br>4000K-5000K | 2812lm | White<br>Black | ILAR-03034<br>ILAR-03035 |

## CHIADO







| Voltage | Body Material | Beam Angle | IP | Mounting Type | Rotable |
|---|---|---|---|---|---|
| 220-240V | Aluminium | 100° | IP65 Front<br>IP20 Back | Recessed | Yes |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Cut-out | Housing Colour | SKU |
|---|---|---|---|---|---|---|
| 32W | 3CCT 3000K-<br>4000K-5700K | 3085lm | 235x145x116.5mm | 220x123mm | White | ILAR-02597 |

## JAZ








| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 100-277V | Aluminum+PC | 90° | IP54 Front<br>IP20 Back | Recessed |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Cut-out | Housing Colour | SKU |
|---|---|---|---|---|---|---|
| 18W | 4000K | 2350lm | Ø190x37mm | Ø160mm | White RAL 9016 | ILAR-00690 |
| | | | 190x190x40mm | Ø160mm | | ILAR-00684 |
| 25W | 4000K | 3650lm | Ø228x37mm | Ø200mm | | ILAR-00693 |
| | | | 228x228x40mm | Ø200mm | | ILAR-00687 |

## DIMMABLE DRIVERS FOR DOWNLIGHTS

| | | IP | SKU |
|---|---|---|---|
|  | Driver for LED Panel 10W Dimmable Triac | IP20 | ILAR-01013 |
|  | Driver for LED Panel 15-18W Dimmable Triac | IP20 | ILAR-01014 |
|  | Driver Dimmable Triac 12W 9-42V Adjustable Current | IP20 | ILAR-02538 |
|  | Driver Dimmable Triac 20W 9-42V Adjustable Current | IP20 | ILAR-02539 |
|  | Driver Dimmable Triac 30W 9-42V Adjustable Current | IP20 | ILAR-02540 |
|  | Driver Dimmable Triac 40W 9-42V Adjustable Current | IP20 | ILAR-02541 |
|  | Driver Dimmable 20W DALI + Push+1-10V 3-36V | IP20 | ILAR-02952 |
|  | Driver Dimmable 20W DALI + Push+1-10V 6-52V | IP20 | ILAR-02953 |
|  | Driver DALI&Push Dimm 30W DALI (250mA-1A) | IP20 | ILAR-02164 |
|  | Driver Dimmable DALI + Push 12W 9-42V Adjustable Current | IP20 | ILAR-02719 |
|  | Driver Dimmable DALI + Push 20W 9-42V Adjustable Current | IP20 | ILAR-02718 |
|  | Driver Dimmable DALI + Push 30W 9-42V Adjustable Current | IP20 | ILAR-02717 |
|  | Driver Dimmable DALI + Push 40W 9-42V Adjustable Current | IP20 | ILAR-02885 |
|  | Driver Meanwell LCM-25DA2 DALI 2 e PUSH-DIM 350-1050mA | IP20 | ILDV-00044 |
|  | Driver Meanwell LCM-25 Corrente Ajustável 350-1050mA 0/1-10V | IP20 | ILDV-01139 |
|  | Driver Meanwell LCM-40DA2 DALI2 e PUSH-DIM 350-1050mA | IP20 | ILDV-00045 |



## DIMMABLE MODULE

| | | IP | SKU |
|---|---|---|---|
|  | Module Triac + Push Dimm + Wireless 300W TRI-C1 | IP20 | ILAR-01447 |
|  | Module Triac + Push Dimm + Wireless 500W TRI-PR | IP20 | ILAR-02608 |
|  | Module Triac+Push Dimm + Wireless + WiFi 300W TRI-C1WR | IP20 | ILAR-01993 |
|  | Module Triac + Push Dimm + Wireless + WiFi 500W TRI-PW | IP20 | ILAR-02609 |
|  | Module Triac + Push Dimm + Wireless + ZigBee 300W TRI-C1Z | IP20 | ILAR-01615 |
|  | Module Triac + Push Dimm + Wireless + ZigBee 500W TRI-PZ | IP20 | ILAR-02610 |
|  | Module DALI+ Push Dimm DBUS100mA | IP20 | ILAR-03010 |
|  | Module 0-10V/1-10V RF + Push Dimmer | IP20 | ILAR-01900 |
|  | Module 0-10V/1-10V WiFi + RF + Push Dimmer | IP20 | ILAR-01901 |
|  | Module 0-10V/1-10V 2 Channels / WiFi + RF + Push Dimmer | IP20 | ILAR-02021 |
|  | Regulator Panel RF & 0/1-10V (230V) | IP20 | ILAR-01904 |
|  | Regulator Panel RF & 0/1-10V 4 Zones (230V) | IP20 | ILAR-01905 |
|  | Regulator Panel Triac & RF 230V-200W | IP20 | ILAR-03013 |
|  | Regulator Panel WiFi + RF & Triac 230V-360W | IP20 | ILAR-03014 |

## LED PANEL




| Voltage | Body Material | Beam Angle | PF | IP | Mounting Type |
|---|---|---|---|---|---|
| 176-264V | Aluminium | 120° | >0.5<br>>0.7 | IP44 | Recessed |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Cut-out | Housing Colour | SKU |
|---|---|---|---|---|---|---|
| **Recessed Round Panel** | | | | | | |
| 3W | 3CCT 3000K- | 275lm | Ø87x18mm | Ø70mm | White | ILAR-02806 |
| 5W | 4000K-6500K | 475lm | Ø87x18mm | Ø70mm | | ILAR-02912 |
| 6W | | 510lm | Ø123x18mm | Ø108mm | | ILAR-02807 |
| 9W | | 720lm | Ø145x18mm | Ø130mm | | ILAR-02808 |
| 12W | | 1070lm | Ø173x18mm | Ø150mm | | ILAR-02809 |
| 18W | | 1630lm | Ø223x18mm | Ø206mm | | ILAR-02810 |
| 24W | | 2160lm | Ø298x18mm | Ø275mm | | ILAR-02811 |
| 30W | | 2700lm | Ø298x18mm | Ø275mm | | ILAR-02913 |
| **Recessed Square Panel** | | | | | | |
| 3W | 3CCT 3000K- | 275lm | 87x87x18mm | 70x70mm | White | ILAR-02909 |
| 6W | 4000K-6500K | 510lm | 123x123x18mm | 108x108mm | | ILAR-02812 |
| 9W | | 720lm | 145x145x18mm | 130x130mm | | ILAR-02911 |
| 12W | | 1070lm | 173x173x18mm | 150x150mm | | ILAR-02813 |
| 18W | | 1630lm | 223x223x18mm | 206x206mm | | ILAR-03016 |
| 24W | | 2160lm | 298x298x18mm | 275x275mm | | ILAR-02910 |
| **Surface Round Panel** | | | | | | |
| 12W | 3CCT 3000K- | 1070lm | Ø170x35mm | | White | ILAR-02029 |
| 18W | 4000K-6500K | 1630lm | Ø225x35mm | | | ILAR-01943 |
| 24W | | 2160lm | Ø300x35mm | | | ILAR-01944 |
| **Surface Square Panel** | | | | | | |
| 12W | 3CCT 3000K- | 1070lm | 170x170x35mm | | White | ILAR-01752 |
| 18W | 4000K-6500K | 1630lm | 225x225x35mm | | | ILAR-02338 |
| 24W | | 2160lm | 300x300x35mm | | | ILAR-02030 |

## LED PANEL BACKLIT




| Voltage | Body Material | Beam Angle | PF | IP | Mounting Type |
|---|---|---|---|---|---|
| 180-265V | Aluminium | 120° | >0.5 | IP44 | Recessed |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±10%) | Size | Cut-out | Housing Colour | SKU |
|---|---|---|---|---|---|---|
| 6W | 3CCT 3000K- | 480lm | Ø93x26.5mm | Ø69-79mm | White | ILAR-03620 |
| 9W | 4000K-6500K | 720lm | Ø121x26.5mm | Ø95-105mm | | ILAR-03621 |
| 18W | | 1440lm | Ø177x26.5mm | Ø145-155mm | | ILAR-03622 |
| 24W | | 1920lm | Ø225x26.5mm | Ø187-197mm | | ILAR-03623 |



# BACKLIT

## LED PANEL


| | | | |
|---|---|---|---|
| 600X600 | 40W | 100LM/W | |
| | 40W | 140LM/W | |
| | 35W | 150LM/W | |
| | 24W | 160LM/W | |
| | 30W | 125LM/W | |
| 1200X300 | 40W | 140LM/W | |
| | 36W | 150LM/W | |

## LED LUMINAIRE

| | | | |
|---|---|---|---|
| 625X625 | BOARD SURFACE | 35W | 140LM/W |
| 1225X325 | BOARD SURFACE | 35W | 140LM/W |
| 1525X325 | BOARD SURFACE | 43W | 145LM/W |

## BACKLIT 600X600






| Voltage | Body Material | Housing Colour | Mounting Type |
|---|---|---|---|
| 220-240V | Aluminium | White | Recessed |


| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | IP | UGR | Beam Angle | Height | SKU |
|---|---|---|---|---|---|---|---|
| **100LM/W** | | | | | | | |
| 40W | 3CCT 3000K- 4000K-6500K | 4000lm | IP44 Front IP40 Back | <19 | 90° | 32mm | ILAR-03611 |
| | | | | <21 | 120° | 32mm | ILAR-03597 |
| **140LM/W** | | | | | | | |
| 40W | 3CCT 3000K-4000K-6500K | 5600lm | IP44 | <19 | 90° | 32mm | ILAR-02914 |
| **150LM/W** | | | | | | | |
| 35W | 3CCT 3000K-4000K-6000K | 5250lm | IP65 | <19 | 90° | 35mm | ILAR-02160 |
| **160LM/W** | | | | | | | |
| 24W | 3CCT 3000K-4000K-6500K | 3840lm | IP44 | <21 | 120° | 32mm | ILAR-01908 |
| | | | | <19 | 90° | 32mm | ILAR-01909 |

**Recommended Accessories**

| | |
|---|---|
| Surface Kit | ILAR-01910 |
| Recessed Kit | ILAR-00333 |
| Set of 4 Springs for Panel | ILAR-00334 |

## LYSS PRO 600X600






| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminium | 90° | IP40 | Recessed |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 30W | 3CCT 3000K-4000K-5700K | 3830lm | White | ILAR-03063 |


**Recommended Accessories**

| | |
|---|---|
| Surface Kit | ILAR-01910 |
| Recessed Kit | ILAR-00333 |



## BACKLIT 1200X300 140LM/W






| Voltage | Body Material | Beam Angle | Housing Colour | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminium | 90° | White | Recessed |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | IP | UGR | SKU |
|---|---|---|---|---|---|
| 40W | 3CCT 3000K-4000K-6500K | 5600lm | IP44 Front IP40 Back | <19 | ILAR-02979 |
| 35W | 3CCT 3000K-4000K-6500K | 5250lm | IP65 | <19 | ILAR-02161 |

**Recommended Accessories**

| | |
|---|---|
| Recessed Kit | ILAR-00508 |
| Surface Kit with Screws | ILAR-02166 |
| Surface Kit without Screws | ILAR-02091 |





## BOARD SURFACE












| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminium | 90° | IP40 | Surface |


| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | UGR | Housing Colour | SKU |
|---|---|---|---|---|---|
| **625X625 140LM/W** | | | | | |
| 23W/29W/35W/40W | 3CCT 3000K-3500K-4000K | 5600lm | <19 | White | ILAR-03671 |
| **1225X325 140LM/W** | | | | | |
| 20W/25W/30W/35W | 3CCT 3000K-3500K-4000K | 4900lm | <19 | White | ILAR-03670 |
| **1520X325 145LM/W** | | | | | |
| 25W/30W/35W/43W | 3CCT 3000K-3500K-4000K | 6200lm | <19 | White | ILAR-02945 |



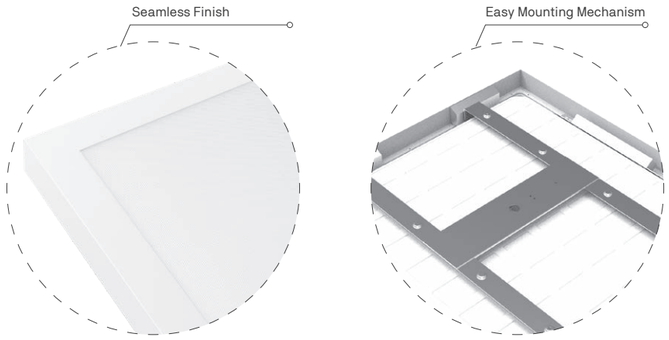


# EDGELIT

## LED PANEL



**600X600** **PRO** **40W** **100LM/W**
**HIGH LUMEN PRO** **40W** **130LM/W**



**600X300** **PRO** **22W** **110LM/W**



**1200X300** **PRO** **40W** **100LM/W**




**1500X300** **PRO** **40W** **120LM/W**



**1200X600** **PRO** **60W** **150LM/W**

## EDGELIT PRO 600X600







| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminium | 90° / 120° | IP40 | Recessed |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | Beam Angle | UGR | SKU |
|---|---|---|---|---|---|---|
| **PRO 100LM/W** | | | | | | |
| 40W | 4000K | 3600lm | White | 90° | <19 | ILAR-00802 |
| | 6000K | | | 90° | <19 | ILAR-00803 |
| | 4000K | | | 120° | <21 | ILAR-00330 |
| | 6000K | | | 120° | <21 | ILAR-00331 |
| **HIGH LUMEN PRO 130LM/W** | | | | | | |
| 40W | 4000K | 5200lm | White | 120° | <21 | ILAR-01125 |

| Options (Not included) | |
|---|---|
| Surface Kit | ILAR-00332 |
| Recessed Kit | ILAR-00333 |
| Suspension Kit | ILAR-00511 |
| Set of 4 Springs for Panel | ILAR-00334 |

## EDGELIT PRO 600X300








| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminium | 120° | IP40 | Recessed |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 22W | 4000K | 2420lm | White | ILAR-01774 |

| Options (Not included) | |
|---|---|
| Surface Kit | ILDV-00032 |
| Recessed Kit | ILAR-03044 |

## EDGELIT PRO 1200X300






| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminium | 120° | IP40 | Recessed |


| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 40W | 4000K | 3600lm | White | ILAR-00506 |
| | 6000K | | | ILAR-00507 |

| Options (Not included) | |
|---|---|
| Surface Kit | ILAR-00509 |
| Recessed Kit | ILAR-00508 |
| Suspension Kit | ILAR-00510 |



## EDGELIT PRO 1500X300







| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminium | 110° | IP40 | Recessed |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 40W | 4000K | 4500lm | White | ILAR-01110 |

| Options (Not included) | |
|---|---|
| Surface Kit | ILAR-01111 |
| Recessed Kit | ILAR-01112 |
| Set of 4 Springs for Panel | ILAR-00990 |

## EDGELIT PRO 1200X600






| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminium | 120° | IP44 | Recessed |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 60W | 4000K | 6000lm | White | ILAR-01124 |

| Options (Not included) | |
|---|---|
| Recessed Kit | ILAR-01556 |
| Surface Kit | ILAR-01555 |
| Set of 4 Springs for Panel | ILAR-00990 |

## ACCESSORIES FOR PANELS

| | | SKU |
|---|---|---|
|  | Driver Dimmable Triac 3-9W 15-30 VDC/150-380MA<br>Driver Dimmable Triac 7-12W 24-42VDC/150-320MA<br>Driver Dimmable Triac 10-18W 30-63VDC/150-450MA<br>Driver Dimmable 40W | ILDV-00013<br>ILDV-00014<br>ILDV-00015<br>ILAR-00496 |
|  | Driver for LED Panel 3.5-25W DALI&Push Dimm DIM 0-10V Multicurrent 250-600mA | ILAR-00925 |
|  | Driver for LED Panel 9.1-46W DALI&Push Dimm DIM 0-10V Multicurrent 650-1100mA | ILAR-00926 |
|  | Driver DALI&Push Dimm 30W DALI (250mA-1A) | ILAR-02164 |
|  | Driver Dimmable Triac 30W 9-42V Adjustable Current | ILAR-02540 |
|  | Driver Dimmable Triac 40W 9-42V Adjustable Current | ILAR-02541 |
|  | Driver Dimmable DALI+Push 30W 9-42V Adjustable Current | ILAR-02717 |
|  | Driver Dimmable DALI+Push 40W 9-42V Adjustable Current | ILAR-02885 |
|  | Driver Meanwell LCM-25DA2 DALI2 e PUSH-DIM 350-1050mA | ILDV-00044 |
|  | Driver Meanwell LCM-25 Corrente Ajustável 350-1050mA 0/1-10V | ILDV-01139 |
|  | Driver Meanwell LCM-40DA2 DALI2 e PUSH-DIM 350-1050mA | ILDV-00045 |
|  | Safety Steel Cable for Panel | ILAR-02803 |
|  | Quick Connection Box for Driver | ILAR-02804 |
|  | Emergency Kit for LED Panel and Downlights 20-55V<br>Emergency Kit for LED Panel and Downlights 60-300V | ILEM-00062<br>ILEM-00063 |



## ACCESSORIES FOR PANELS

| | | SKU |
|---|---|---|
|  | Module Triac + Push Dimm + Wireless 300W TRI-C1 | ILAR-01447 |
|  | Module Triac + Push Dimm + Wireless 500W TRI-PR | ILAR-02608 |
|  | Module Triac + Push Dimm + Wireless + WiFi 300W TRI-C1WR | ILAR-01993 |
|  | Module Triac + Push Dimm + Wireless + WiFi 500W TRI-PW | ILAR-02609 |
|  | Module Triac + Push Dimm + Wireless + ZigBee 300W TRI-C1Z | ILAR-01615 |
|  | Module Triac + Push Dimm + Wireless + ZigBee 500W TRI-PZ | ILAR-02610 |
|  | Module DALI + Push Dimm DBUS100mA | ILAR-03010 |
|  | Module 0-10V/1-10V RF + Push Dimmer | ILAR-01900 |
|  | Module 0-10V/1-10V WiFi + RF + Push Dimmer | ILAR-01901 |
|  | Module 0-10V/1-10V 2 is / WiFi + RF + Push Dimmer | ILAR-02021 |
|  | Regulator Panel RF & 0/1-10V (230V) | ILAR-01904 |
|  | Regulator Panel RF & 0/1-10V 4 Zonas (230V) | ILAR-01905 |
|  | Regulator Panel Triac & RF 230V-200W | ILAR-03013 |
|  | Regulator Panel WiFi + RF & Triac 230V-360W | ILAR-03014 |
|  | Set of 4 Springs for Panel | ILAR-00334 |





# INTERIOR


LINEAR LIGHT AND SUSPENSION


**ALL LIGHTING SOLUTIONS**

## LYNX LINEAR RECESSED

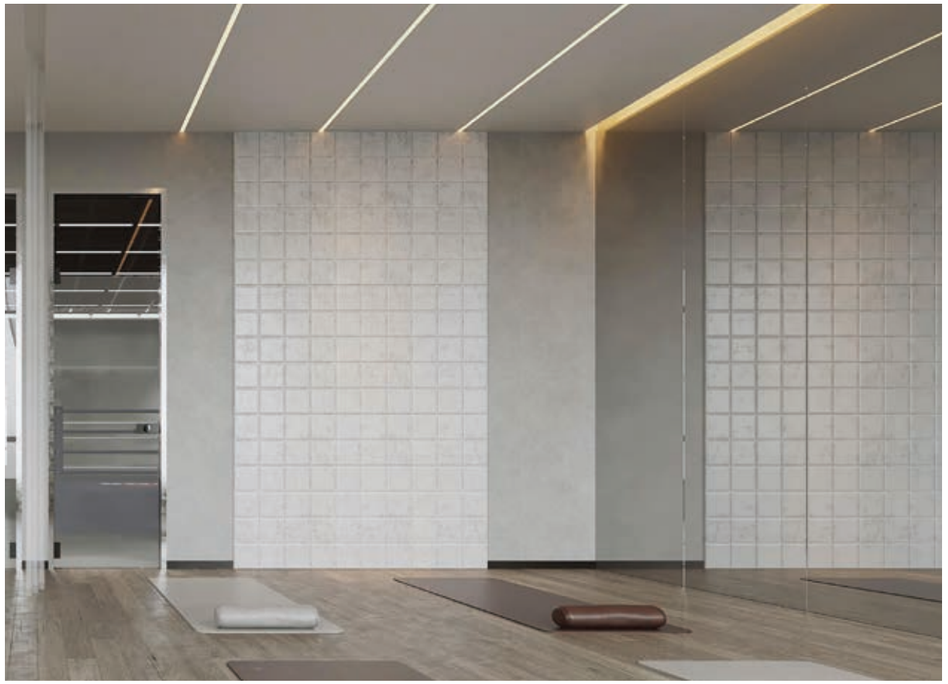






| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 200-240V | Aluminium | 110° | IP40 | Recessed |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Cut-out | Housing Colour | SKU |
|---|---|---|---|---|---|---|
| 15W | 3CCT 3000K- | 1400-1600lm | 615x62x29mm | 607x54mm | White RAL 9016 | ILAR-01583 |
| 30W | 4000K-5700K | 3100-3400lm | 1208x62x29mm | 1201x54mm | | ILAR-01584 |
| 37W | | 3820-4190lm | 1505x62x29mm | 1499x54mm | | ILAR-02921 |

**Options (Not included)**



X Conector
ILAR-01585



T Conector
ILAR-01586



L Conector
ILAR-01587



Corner Conector Out
ILAR-01588





Corner Conector In
ILAR-01589



## SCHOOL WALL WASH







| Voltage | Body Material | Beam Angle | Mounting Type |
|---|---|---|---|
| 200-240V | Aluminium | Asymmetrical (36°x20°) | Recessed |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 15W | 3CCT 3000K- | 1250-1450lm | White RAL 9016 | ILAR-01593 |
| 30W | 4000K-5700K | 2900-3300lm | White RAL 9016 | ILAR-01594 |



## LINEAR MODULAR LIGHT






| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 170-265V | Aluminium+PC | 120° | IP20 | Surface/Suspended |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Housing Colour | SKU |
|---|---|---|---|---|---|
| 20W | 3CCT 3000K- | 2400lm | 600x54x58mm | | ILAR-02111 |
| 40W | 4000K-6000K | 4800lm | 1200x54x58mm | | ILAR-02112 |

**Options (Not included)**



X Conector
ILAR-02115



T Conector
ILAR-02114



L Conector
ILAR-02113



L Conector 120°
ILAR-02844



Y Conector
ILAR-02845



Power Cable
1.5M
ILAR-01814



Connect
Cable 2M
ILAR-01815



Suspension Kit
ILAR-01810



Recessed Kit
ILAR-01811




Surface Kit
ILAR-01812





## LYNX LINEAR






| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 200-240V | Aluminium | 100° | IP20 | Surface Mounted/Suspended |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 20W - Opal | 3CCT 3000K- | 2200-2400lm | White RAL 9016 | ILAR-01664 |
| | 4000K-5700K | | Black RAL 9005 | ILAR-01663 |
| 40W - Opal | | 4400-4800lm | White RAL 9016 | ILAR-00767 |
| | | | Black RAL 9005 | ILAR-01004 |
| 40W - Reflector | | 4800-5200lm | White RAL 9016 | ILAR-01025 |
| | | | Black RAL 9005 | ILAR-01036 |

**Options (Not included)**



Suspension KIT
ILAR-00771



Connector
ILAR-00772




Dimmable Driver 1-10V
ILAR-01015



## LYNX EVO








| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminium | 120° | IP20 | Pendant/Surface/Trimless |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | COLOR | SKU |
|---|---|---|---|---|---|
| 18W | 3CCT 3000K-4000K-5700K | 2250lm | 600x55x75mm | White RAL 9016 | ILAR-02251 |
| | | | | Black RAL 9005 | ILAR-02252 |
| 36W | | 4500lm | 1200x55x75mm | White RAL 9016 | ILAR-02249 |
| | | | | Black RAL 9005 | ILAR-02250 |
| 45W | | 5625lm | 1500x55x75mm | White RAL 9016 | ILAR-02247 |
| | | | | Black RAL 9005 | ILAR-02248 |

**Options (Not included)**



L Connector
8W Opal
White: ILAR-02253
Black: ILAR-02254



120° L Connector
8W Opal
White: ILAR-02255
Black: ILAR-02256



T Connector
10W Opal
White: ILAR-02257
Black: ILAR-02258



120° Y Connector
10W Opal
White: ILAR-02259
Black: ILAR-02260



X Connector
12W Opal
White: ILAR-02261
Black: ILAR-02262



1500mm
Trimless KIT
ILAR-02263



1200mm
Trimless KIT
ILAR-02264



600mm
Trimless KIT
ILAR-02265



Suspension
KIT 2.5m
ILAR-02266




Connection/
Suspension Plate
ILAR-02267



## LYNX SLIM








| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminium | 80° | IP20 | Suspended |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Housing Colour | SKU |
|---|---|---|---|---|---|
| 15W | 2CCT 3000K-4000K | 1150-1650lm | 605x34x105mm | White RAL 9016 | ILAR-03688 |
| | | | 605x34x105mm | Black RAL 9005 | ILAR-03689 |
| 30W | 2CCT 3000K-4000K | 2550-3300lm | 1205x34x105mm | White RAL 9016 | ILAR-03686 |
| | | | 1205x34x105mm | Black RAL 9005 | ILAR-03687 |

**Options (Not included)**



8W Uplight Module
ILAR-03690



3W Uplight Module
ILAR-03691




Honeycomb
ILAR-03692

## SLASH









| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 200-240V | Aluminium | 90° | IP20 | Suspended |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 30W | 3000K | 940lm | Silver | ILAR-02235 |
| | | | Copper | ILAR-02236 |



## TRACE






| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 200-240V | Aluminium | 90° | IP20 | Suspended |


| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 18W | 3000K | 920lm | Matt Black | ILAR-02232 |



## THANE








| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminium | 120° | IP40 | Recessed/Suspended |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 35W | 4000K | 2900lm | White RAL 9016 | ILAR-00711 |

**Options (Not included)**




Suspension Kit
ILAR-00713



## AURA CIRCULAR








| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminium | 90° | IP42 | Suspended |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Housing Colour (White on request) | SKU |
|---|---|---|---|---|---|
| 50W | 2CCT 3000K- 4000K | 2750lm - 2900lm | Ø800x35x35mm | Black RAL 9005 | ILAR-02222 |
| 72W | | 4000lm - 4200lm | Ø1200x35x35mm | Black RAL 9005 | ILAR-02223 |
| 90W | | 5000lm - 5200lm | Ø1500x35x35mm | Black RAL 9005 | ILAR-02224 |

**Light Emission Type (On Request)**



OUTER INNER UP

## VISTA






| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminium | 90° | IP20 | Suspended |


| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 30W | 3000K | 1410lm | Matt Black | ILAR-02226 |
| 50W | | 2350lm | | ILAR-02225 |





## LUNA






| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminium | 360° | IP20 | Suspended |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Housing Colour | SKU |
|---|---|---|---|---|---|
| 46W | 2CCT 3000K-4000K | 5500-5900lm | Ø800x60mm | Black RAL 9005 | ILAR-03679 |
| 60W | 2CCT 3000K-4000K | 6800-7500lm | Ø1000x60mm | Black RAL 9005 | ILAR-03680 |

**Options (Not included)**



Acoustic Panel - 0.8m
ILAR-03681




Acoustic Panel - 1m
ILAR-03682



## OFFICE PRO V2








| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 200-240V | Aluminium | 120° | IP40 | Surface/Suspended |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Housing Colour | SKU |
|---|---|---|---|---|---|
| 40W | 2CCT 3000K-4000K | 4450-4800lm | Ø400x86x55x219mm | Black RAL 9005 | ILAR-03695 |
| 60W | | 7400-7900lm | Ø600x86x55x383mm | | ILAR-03696 |
| 75W | | 9930-10500lm | Ø800x86x55x383mm | | ILAR-03697 |
| 100W | | 11600-12600lm | Ø1000x86x55x383mm | | ILAR-03698 |
| 40W | 2CCT 3000K-4000K | 4450-4800lm | Ø400x86x55x219mm | White RAL 9016 | ILAR-03703 |
| 60W | | 7400-7900lm | Ø600x86x55x383mm | | ILAR-03704 |
| 75W | | 9930-10500lm | Ø800x86x55x383mm | | ILAR-03705 |
| 100W | | 11600-12600lm | Ø1000x86x55x383mm | | ILAR-03706 |

**Options (Not included)**




Suspension Kit - Black
ILAR-02048



## FIZI







| Voltage | Body Material | Beam Angle | IP | Dimmable | Mounting Type |
|---|---|---|---|---|---|
| 200-240V | PC+Aluminium | 360° | IP40 | 1-10V | Suspended |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Housing Colour | SKU |
|---|---|---|---|---|---|
| 30W | 4000K | 3900lm | 900mm | White End Cap | ILAR-02150 |
| | | | 1200mm | Black End Cap | ILAR-02151 |



## PASCAL






| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 200-240V | Aluminium | 36° | IP20 | Suspended |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 18W | 2700K | 1650lm | White RAL 9016 | ILAR-00701 |
| | | | Black RAL 9005 | ILAR-00704 |
| | 4000K | 1750lm | White RAL 9016 | ILAR-00702 |
| | | | Black RAL 9005 | ILAR-00705 |



## PASCAL GU10






| Voltage | Body Material | IP | Mounting Type |
|---|---|---|---|
| 100-240V | Aluminium | IP20 | Suspended |

| Power | Type Of Bulb | Size | Housing Colour | SKU |
|---|---|---|---|---|
| MAX 7W | 1x GU10 | 300mm | Black | ILAR-03740 |
| | | 300mm | White | ILAR-03741 |
| | 1x GU10 | 400mm | Black | ILAR-03742 |
| | | 400mm | White | ILAR-03743 |
| | 1x GU10 | 500mm | Black | ILAR-03744 |
| | | 500mm | White | ILAR-03745 |

*Lamps not included.


## LUNO



| Voltage | Body Material | IP | Mounting Type |
|---|---|---|---|
| 100-240V | Aluminium | IP20 | Suspended |

| Power | Type Of Bulb | Size | Housing Colour | SKU |
|---|---|---|---|---|
| MAX 35W | 1x E27 | Ø400mm | Black-White | ILAR-03754 |
| | 1x E27 | Ø400mm | White-White | ILAR-03753 |

*Lamps not included.

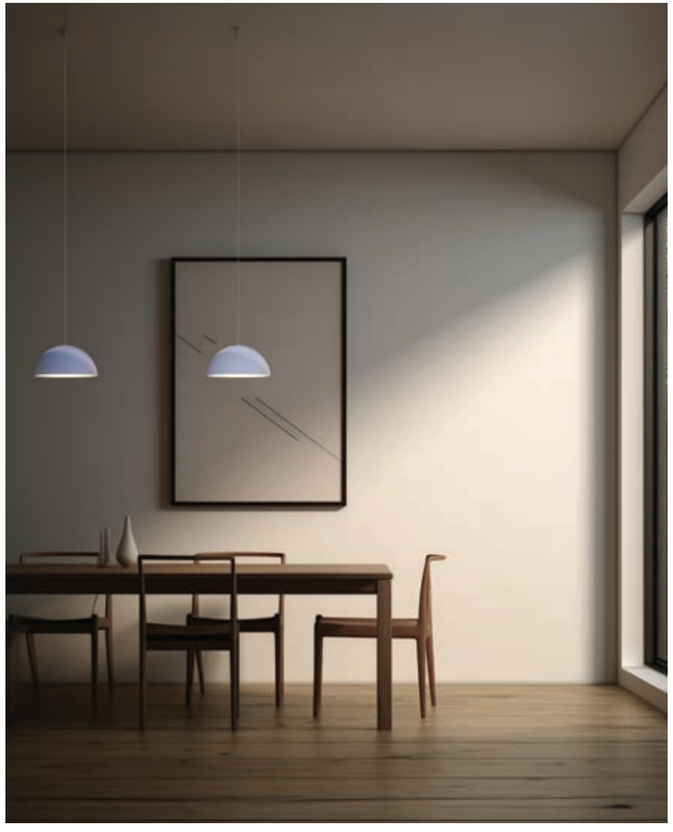

## VIRA



| Voltage | Body Material | IP | Mounting Type |
|---|---|---|---|
| 100-240V | Aluminium | IP20 | Suspended |

| Power | Type Of Bulb | Size | Housing Colour | SKU |
|---|---|---|---|---|
| MAX 35W | 1x E27 | Ø320mm | Black-White | ILAR-03755 |
| | 1x E27 | Ø320mm | White-White | ILAR-03756 |

*Lamps not included.



## JULLE



| Voltage | Body Material | IP | Mounting Type |
|---|---|---|---|
| 100-240V | Aluminium | IP20 | Suspended |

| Power | Type Of Bulb | Size | Housing Colour | SKU |
|---|---|---|---|---|
| MAX 35W | 1x E27 | Ø300mm | Black | ILAR-03758 |
| | 1x E27 | Ø300mm | White | ILAR-03757 |

*Lamps not included.

## NOVVA



| Voltage | Body Material | IP | Mounting Type |
|---|---|---|---|
| 100-240V | Aluminium | IP20 | Suspended |

| Power | Type Of Bulb | Size | Housing Colour | SKU |
|---|---|---|---|---|
| MAX 35W | 1x E27 | Ø800mm | Black-Copper | ILAR-03759 |

*Lamps not included.



78—93



# INTERIOR

## SURFACE LIGHT


ALL LIGHTING SOLUTIONS

## VIGG











| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 200-240V | Aluminium | 60° | IP54 | Surface Mounted |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 10W | 2700K | 1090lm | White RAL 9016 | ILAR-00998 |
| | | | Black RAL 9005 | ILAR-00999 |
| 10W | 4000K | 1090lm | White RAL 9016 | ILAR-00996 |
| | | | Black RAL 9005 | ILAR-00997 |



## ASH







| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 200-240V | Aluminum Die-Casting | 45° | IP65 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 6W | 3000K | 410lm | Grey | ILAR-00808 |



## DESMI






| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 200-240V | Aluminum Die-Casting | 60° | IP65 | Surface |


| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 10W | 3CCT | 1100lm | White RAL 9016 | ILAR-03719 |
| | | | Black RAL 9005 | ILAR-03720 |
| 18W | 3000K | 1900lm | White RAL 9016 | ILAR-02095 |
| | | | Black RAL 9005 | ILAR-03718 |



## LEV









| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 200-240V | Aluminium | 60° | IP54 | Surface Mounted |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 15W | 2700K | 1300lm | White RAL 9016 | ILAR-00695 |
| | 3000K | 1300lm | White RAL 9016 | ILAR-02520 |
| | 4000K | 1500lm | White RAL 9016 | ILAR-00696 |
| | 2700K | 1300lm | Black RAL 9005 | ILAR-00698 |
| | 4000K | 1500lm | Black RAL 9005 | ILAR-00699 |

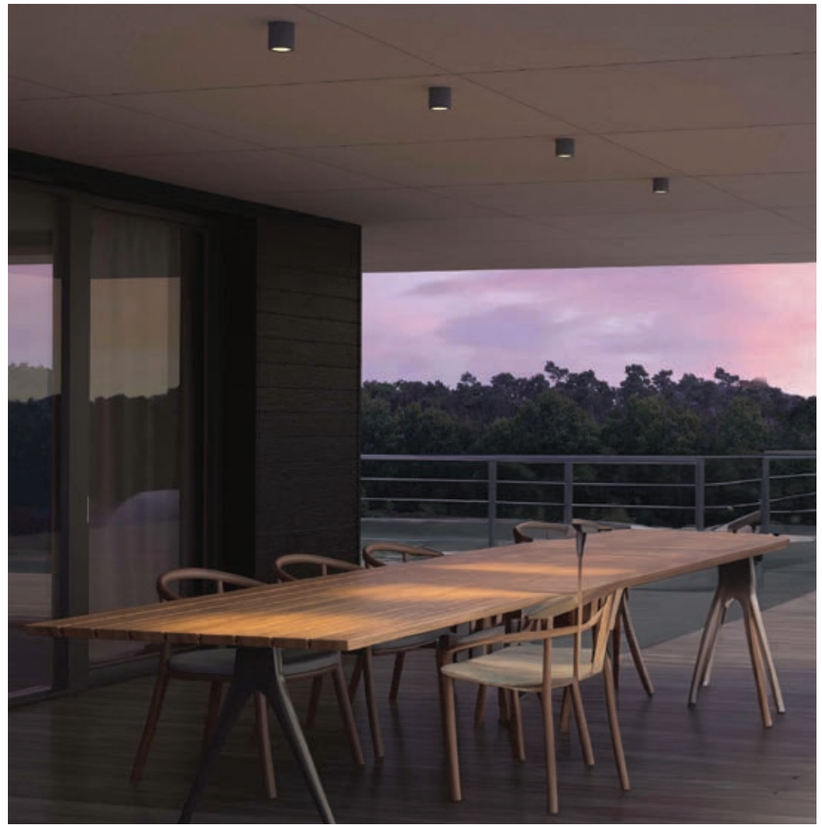




## VIGG GU10








| Voltage | Body Material | IP | Mounting Type |
|---|---|---|---|
| 110-240V | Aluminium | IP20 | Surface |


| Power | Type of Bulb | Housing Colour | SKU |
|---|---|---|---|
| Max. 7W | 1x GU10 | White | ILAR-02452 |
| | | Black | ILAR-02453 |

*Lamps Not Included

## LEV GU10








| Voltage | Body Material | IP | Mounting Type |
|---|---|---|---|
| 110-240V | Aluminium | IP20 | Surface |


| Power | Type of Bulb | Housing Colour | SKU |
|---|---|---|---|
| Max. 7W | 1x GU10 | White | ILAR-02454 |
| | | Black | ILAR-02455 |

*Lamps Not Included

## MINI LEV GU10 IP65








| Voltage | Body Material | IP | Mounting Type |
|---|---|---|---|
| 110-240V | Aluminium | IP65 | Surface |


| Power | Type of Bulb | Housing Colour | SKU |
|---|---|---|---|
| Max. 7W | 1x GU10 | Black | ILAR-03674 |
| | | White | ILAR-03675 |

*Lamps Not Included

## PRADO GU10








| Voltage | Body Material | IP | Mounting Type |
|---|---|---|---|
| 110-240V | Aluminium | IP20 | Surface |

| Power | Type of Bulb | Housing Colour | SKU |
|---|---|---|---|
| Max. 7W | 1x GU10 | White | ILAR-03068 |
| | | Black | ILAR-03069 |


*Lamps Not Included

## NATAN GU10

**ONE**









**DOUBLE**









**TRIPLE**








| Voltage | Body Material | IP | Mounting Type |
|---|---|---|---|
| 110-240V | Aluminium | IP20 | Surface |


| Power | Model | Type of Bulb | Size | Housing Colour | SKU |
|---|---|---|---|---|---|
| Max. 7W | Single | 1X GU10 | 110x90x10.5mm | White | ILAR-00885 |
| | | | | Black | ILAR-00893 |
| Max. 2x 7W | Double | 2X GU10 | 305x90x10.5mm | White | ILAR-00886 |
| | | | | Black | ILAR-01139 |
| Max. 3x 7W | Triple | 3X GU10 | 480x90x10.5mm | White | ILAR-00891 |
| | | | | Black | ILAR-01140 |

*Lamps Not Included



## ROLL







| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminium + Glass | 360° | IP20 | Surface Mounted |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 18W | 2700K | 264lm | Copper | ILAR-02227 |



## LUPO WALL






| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminium | 360° | IP54 | Surface Mounted |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 15W | 2700K | 1092lm | Matt Black | ILAR-02228 |




## TIDE










| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminium | 60° | IP20 | Wall Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 8W | 3000K | 440lm | Matt White | ILAR-02233 |
| | | | Matt Black | ILAR-02234 |





## DUNA











| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminium | 185° | IP20 | Wall Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Housing Colour | SKU |
|---|---|---|---|---|---|
| 9W | 3000K | 855lm | 315x85x33mm | White | ILAR-01742 |
| | | | | Black | ILAR-01743 |
| | | | | Wooden | ILAR-01744 |
| | | | | Golden | ILAR-01745 |
| 19W | 3000K | 1805lm | 590x85x33mm | White | ILAR-01746 |
| | | | | Black | ILAR-03291 |
| 29W | 3000K | 3420lm | 890x85x33mm | White | ILAR-01747 |
| | | | | Black | ILAR-03772 |




## CUBE











| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminium | 15°-120° | IP20 | Wall Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 6W | 3000K | 570lm | White | ILAR-01740 |
| | | | Black | ILAR-01741 |

## ALPI








| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminium | 120° | IP20 | Wall Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 18W | 3000K | 1710lm | White | ILAR-01748 |
| | | | Black | ILAR-01749 |




## FREDI











| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminium | 120° | IP20 | Wall Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 9W | 3000K | 855lm | White | ILAR-01750 |
| | | | Black | ILAR-01751 |

## AIKA






| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | PC+Aluminium | 110° | IP20 | Wall Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 12W | 3CCT 3000K-4000K-5700K | 1560lm | White | ILAR-02035 |





## HAIA











| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | PC+Aluminium | 110° | IP54 | Wall Surface |


| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Housing Colour | SKU |
|---|---|---|---|---|---|
| 10W | 3CCT 3000K-4000K-5700K | 1340lm | 600x61x81mm | White | ILAR-02036 |
| | | | | Silver | ILAR-02037 |
| | | | | Gold | ILAR-02038 |
| 15W | 3CCT 3000K-4000K-5700K | 1950lm | 900x61x81mm | White | ILAR-02039 |
| | | | | Silver | ILAR-02040 |

## KIRA








| Voltage | Body Material | Beam Angle | IP | Mounting Type | Rotable |
|---|---|---|---|---|---|
| 220-240V | PC+Aluminium | 120° | IP40 | Wall Surface | Yes |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Housing Colour | SKU |
|---|---|---|---|---|---|
| 10W | 3CCT 3000K 4000K-5700K | 1180lm | 580x41x111x40x285mm | White | ILAR-02041 |
| | | | | Black | ILAR-02042 |
| 15W | 3CCT 3000K 4000K-5700K | 1850lm | 860x41x111x40x440mm | White | ILAR-02043 |
| | | | | Black | ILAR-02044 |






94—109

# 48V

## PROFESSIONAL 48V LIGHTING

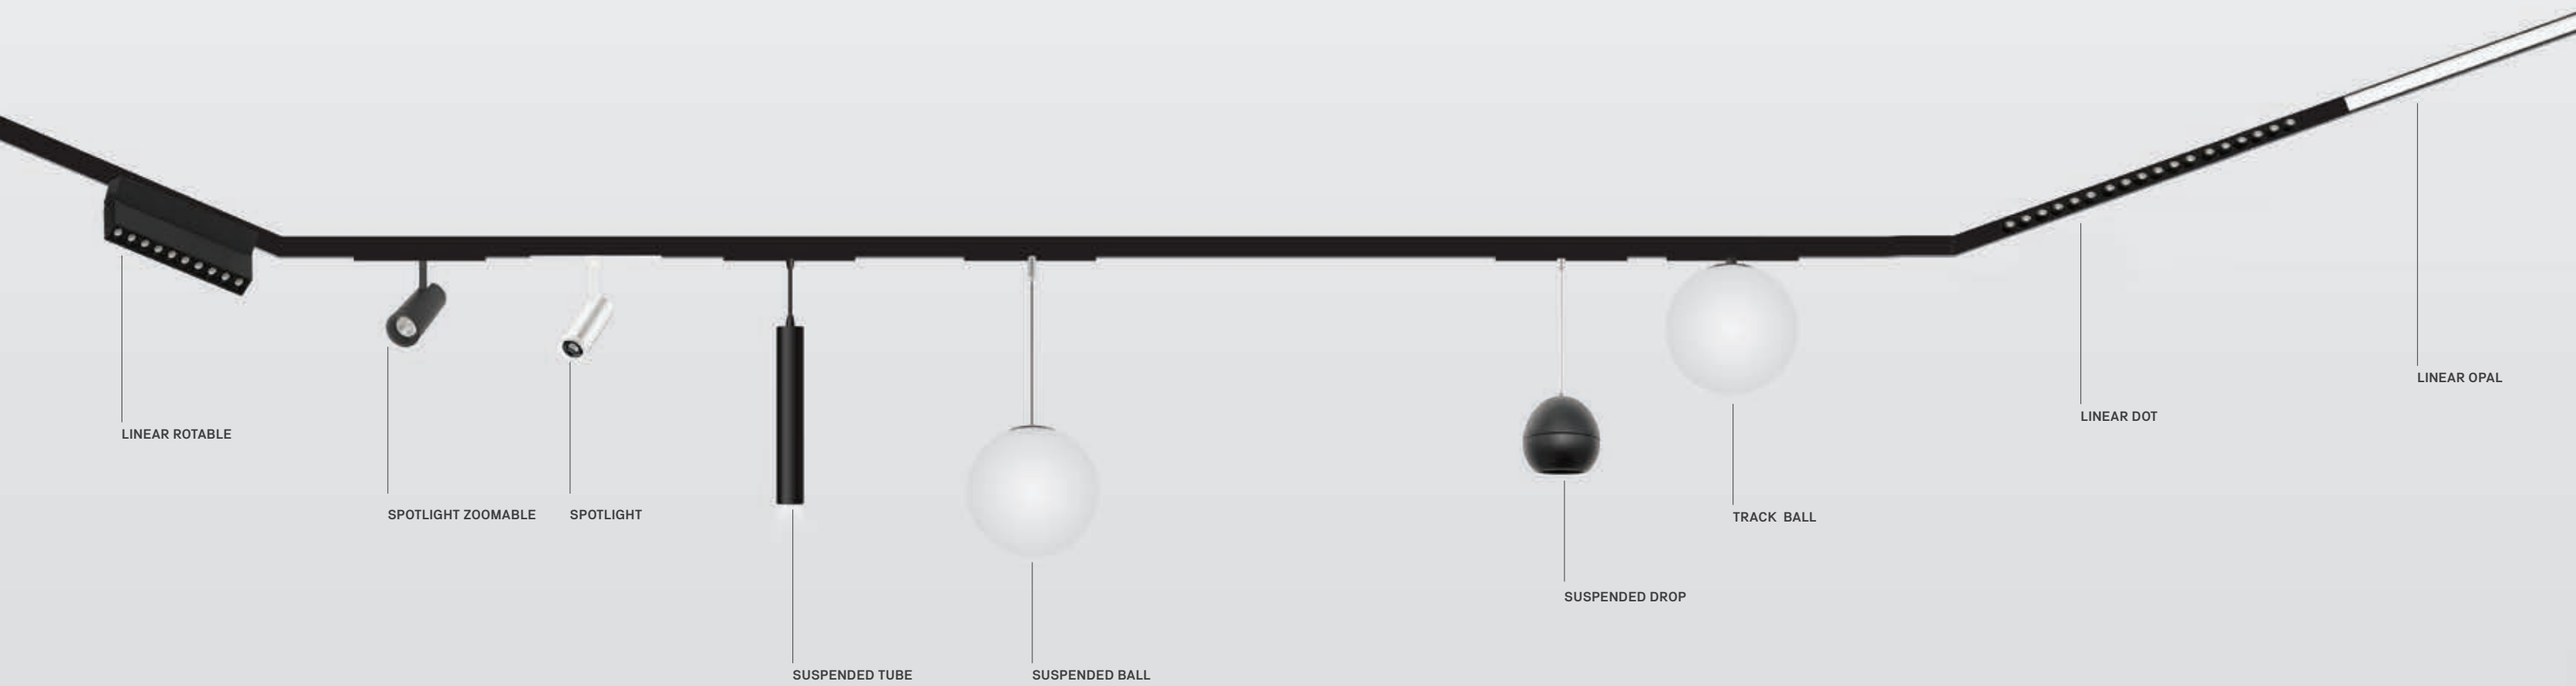






ALL LIGHTING SOLUTIONS

## TRACKLIGHT INSTALLATION

This magnetic rail with two copper conductors on each side acts as the phase and neutral of the circuit to power the lights installed on it. It also includes an iron strip that attracts magnetic lights, making installation extremely simple, with no tools required.

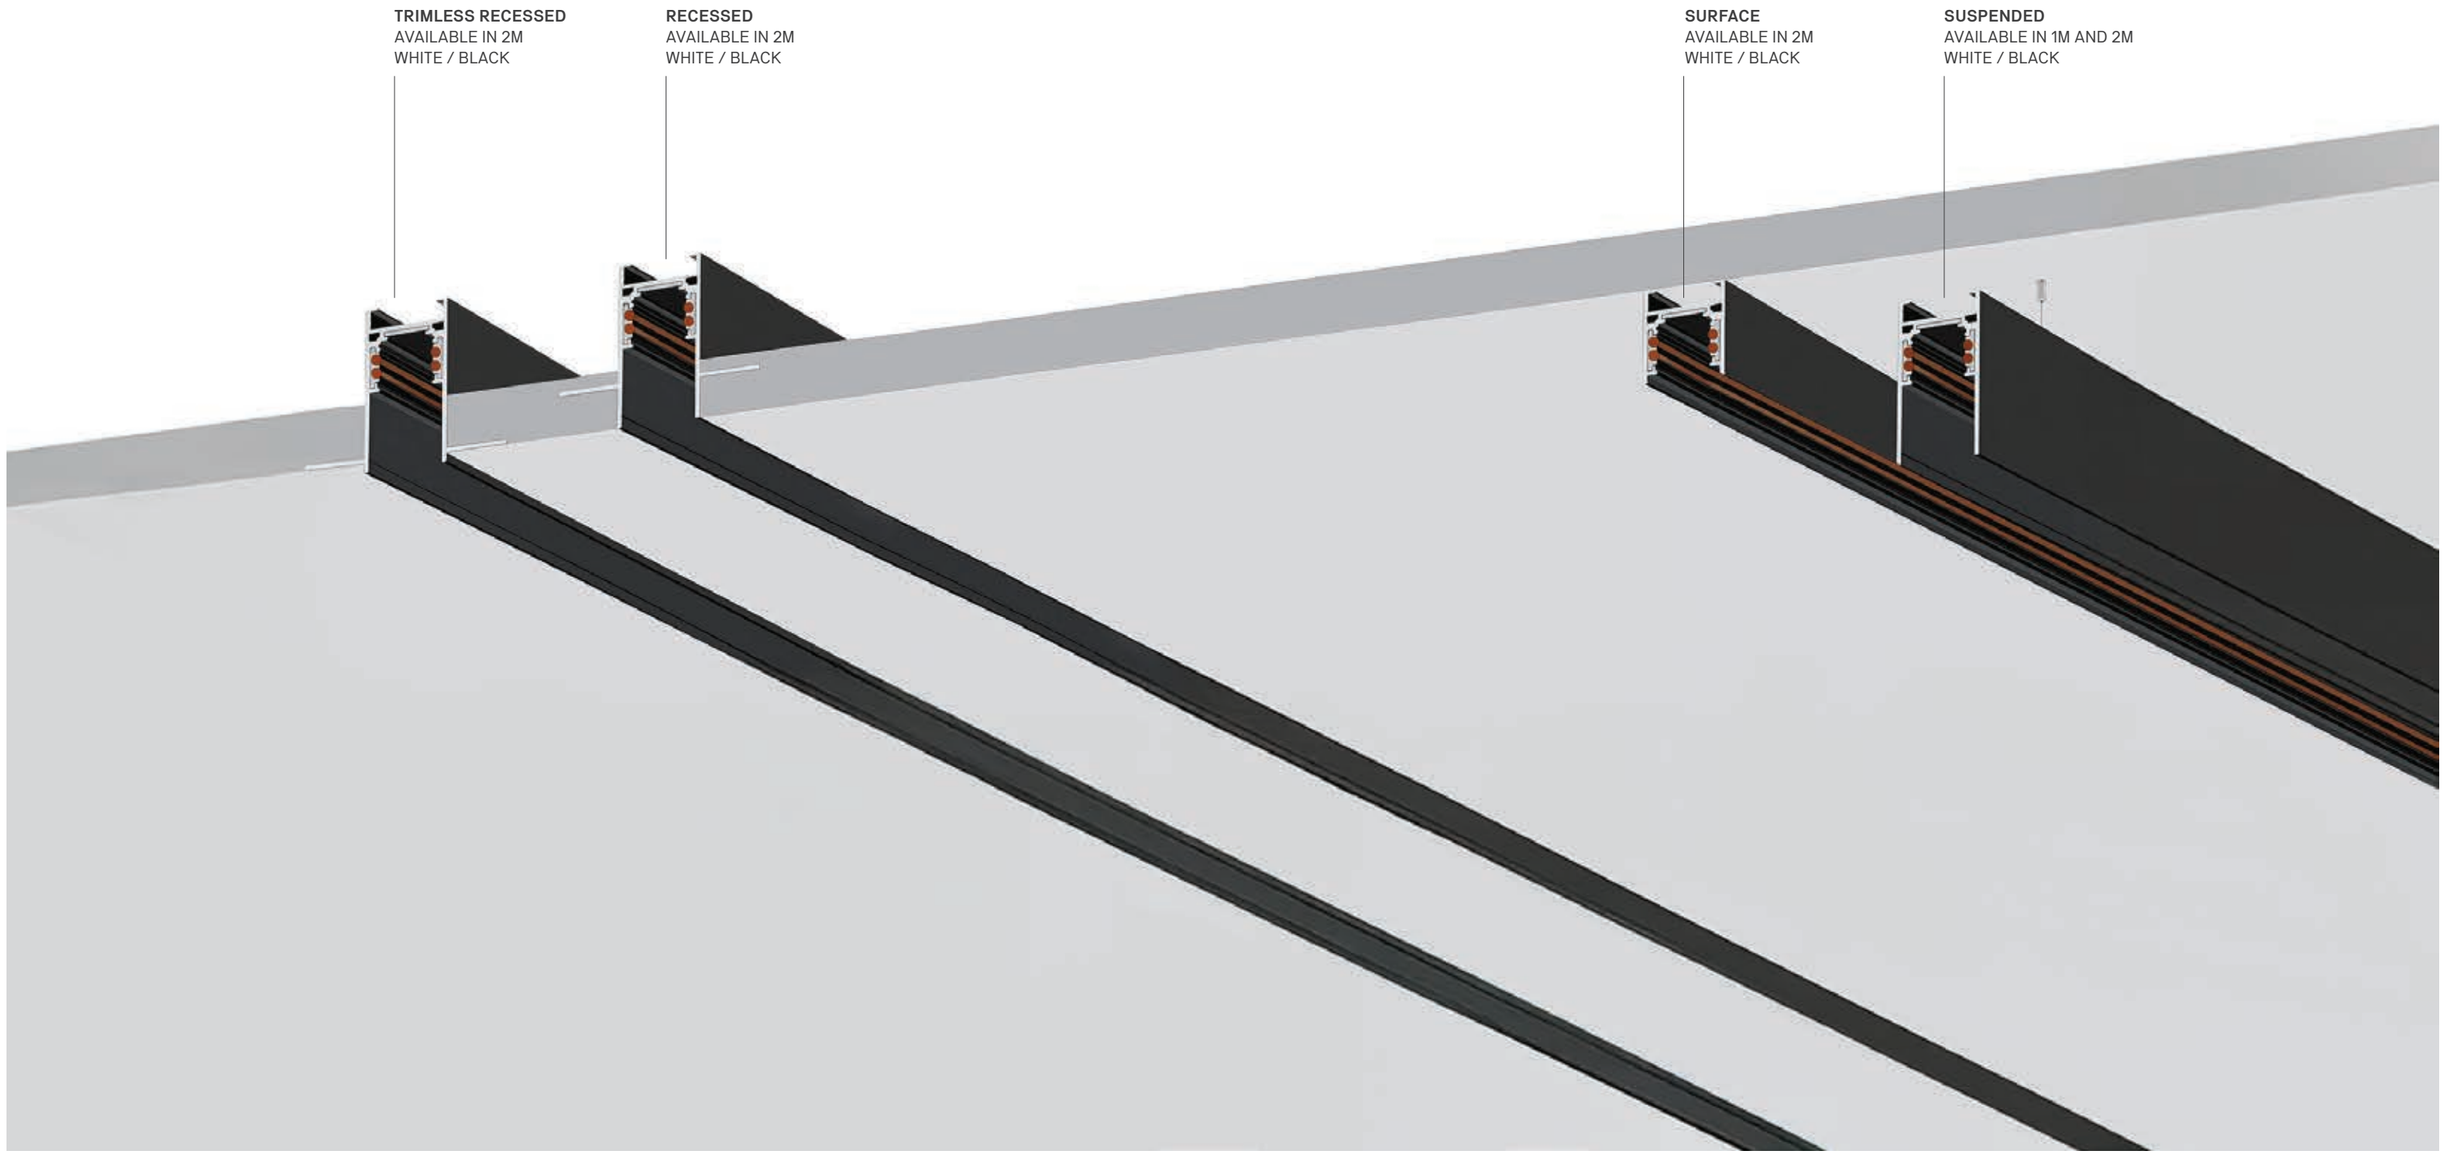


## LINEAR DOT

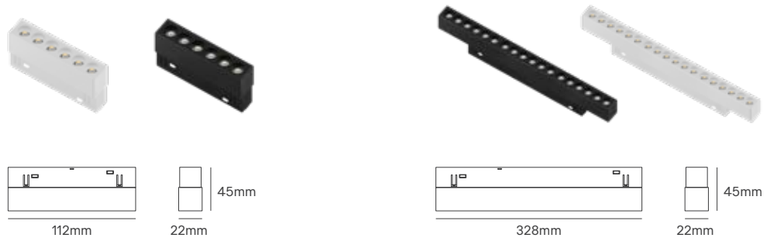


| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 48V | Aluminium | 36° | IP20 | Tracklight 48V |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Housing Colour | SKU |
|---|---|---|---|---|---|
| 6W | 2700K | 240lm | L112 | White | ILAR-03390 |
| | 4000K | | | White | ILAR-03392 |
| | 2700K | | | Black | ILAR-03391 |
| | 4000K | | | Black | ILAR-03393 |
| 18W | 2700K | 900lm | L328 | White | ILAR-03394 |
| | 4000K | | | White | ILAR-03396 |
| | 2700K | | | Black | ILAR-03395 |
| | 4000K | | | Black | ILAR-03397 |

## LINEAR DOT ROTABLE

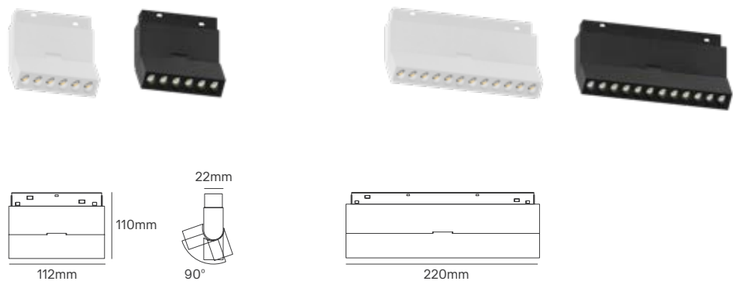


| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 48V | Aluminium | 36° | IP20 | Tracklight 48V |


| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Housing Colour | SKU |
|---|---|---|---|---|---|
| 6W | 2700K | 240lm | L112 | White | ILAR-03398 |
| | 4000K | | | White | ILAR-03400 |
| | 2700K | | | Black | ILAR-03399 |
| | 4000K | | | Black | ILAR-03401 |
| 12W | 2700K | 600lm | L220 | White | ILAR-03402 |
| | 4000K | | | White | ILAR-03404 |
| | 2700K | | | Black | ILAR-03403 |
| | 4000K | | | Black | ILAR-03405 |








## LINEAR OPAL

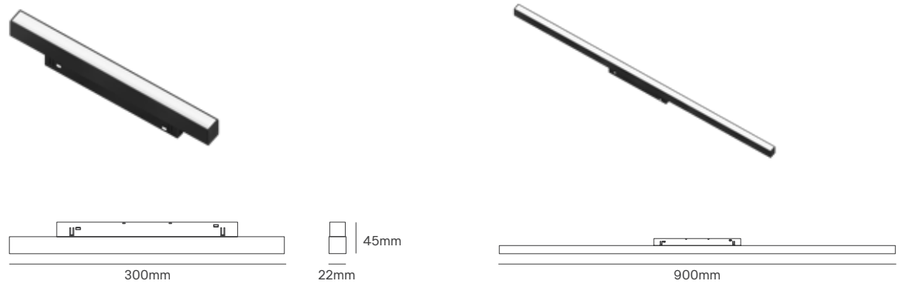


| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 48V | Aluminium | 120° | IP20 | Tracklight 48V |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Housing Colour | SKU |
|---|---|---|---|---|---|
| 10W | 2700K | 500lm | L300 | Black | ILAR-03406 |
| | 4000K | | | Black | ILAR-03407 |
| 30W | 2700K | 2100lm | L900 | Black | ILAR-03408 |
| | 4000K | | | Black | ILAR-03409 |

## CORNER OPAL

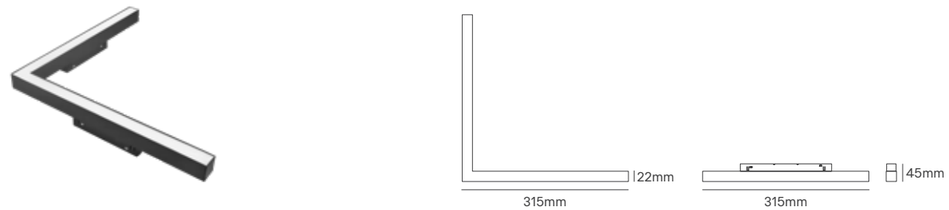



| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 48V | Aluminium | 120° | IP20 | Tracklight 48V |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Housing Colour | SKU |
|---|---|---|---|---|---|
| 20W | 2700K | 1200lm | L315xW315 | Black | ILAR-03410 |
| | 4000K | | | Black | ILAR-03411 |

## TRACK / SUSPENDED BALL









| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 48V | Aluminium | 340° | IP20 | Tracklight 48V |

| Model | Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Housing Colour | SKU |
|---|---|---|---|---|---|---|
| Track | 9W | 2700K | 360lm | D150 | White | ILAR-03412 |
| | | 4000K | | | White | ILAR-03413 |
| Suspended | 9W | 2700K | 360lm | D150 | White | ILAR-03430 |
| | | 4000K | | | White | ILAR-03431 |



## SUSPENDED DROP







| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 48V | Aluminum | 24° | IP20 | Tracklight 48V |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 12W | 2700K | 600lm | White | ILAR-03434 |
| | | | Black | ILAR-03435 |



## SUSPENDED TUBE






| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 48V | Aluminum | 36° | IP20 | Tracklight 48V |


| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Housing Colour | SKU |
|---|---|---|---|---|---|
| 9W | 2700K | 480lm | L300 | White | ILAR-03432 |
| | | | | Black | ILAR-03433 |



## SPOTLIGHT









| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 48V | Aluminum | 24° | IP20 | Tracklight 48V |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Housing Colour | SKU |
|---|---|---|---|---|---|
| 7W | 2700K | 280lm | Ø35x80mm | White | ILAR-03414 |
| | 4000K | | | White | ILAR-03416 |
| | 2700K | | | Black | ILAR-03415 |
| | 4000K | | | Black | ILAR-03417 |
| 12W | 2700K | 600lm | Ø45x100mm | White | ILAR-03418 |
| | 4000K | | | White | ILAR-03420 |
| | 2700K | | | Black | ILAR-03419 |
| | 4000K | | | Black | ILAR-03421 |

## SPOTLIGHT ZOOMABLE








| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 48V | Aluminum | Zoomable 15°-55° | IP20 | Tracklight 48V |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | Size | SKU |
|---|---|---|---|---|---|
| 7W | 2700K | 280lm | White | Ø35x80mm | ILAR-03422 |
| | 4000K | | White | | ILAR-03424 |
| | 2700K | | Black | | ILAR-03423 |
| | 4000K | | Black | | ILAR-03425 |
| 24W | 2700K | 1440lm | White | Ø65x135mm | ILAR-03426 |
| | 4000K | | White | | ILAR-03428 |
| | 2700K | | Black | | ILAR-03427 |
| | 4000K | | Black | | ILAR-03429 |



## ACCESSORIES 48V IP20

| | | Size | Housing Colour | Body Material | SKU |
|---|---|---|---|---|---|
| **SUSPENDED TRACKS AND CORNERS** | | | | | |
|  | 20mm Susp Track | 1000mm | White | Aluminium | ILAR-03335 |
| | 20mm Susp Track | 2000mm | White | | ILAR-03336 |
|  | 20mm SUSP Track | 1000mm | Black | Aluminium | ILAR-03337 |
| | 20mm Susp Track | 2000mm | Black | | ILAR-03338 |
|  | 20mm Susp 90° Corner Connect Module | | White | Aluminium | ILAR-03339 |
|  | 20mm Susp 90° Corner Connect Module | | Black | Aluminium | ILAR-03340 |
|  | 20mm Susp 90° Vertical Corner | | White | Aluminium | ILAR-03341 |
|  | 20mm Susp 90° Vertical Corner | | Black | Aluminium | ILAR-03342 |
|  | 20mm Susp 90° Horizontal Corner | | White | Aluminium | ILAR-03343 |
|  | 20mm Susp 90° Horizontal Corner | | Black | Aluminium | ILAR-03344 |
| **TRIMLESS RECESSED TRACKS AND CORNERS** | | | | | |
|  | 20mm Trim Track | 2000mm | White | Aluminium | ILAR-03345 |
|  | 20mm Trim Track | 2000mm | Black | Aluminium | ILAR-03346 |
|  | 20mm Trim 90° Vertical Corner | | White | Aluminium | ILAR-03347 |
|  | 20mm Trim 90° Vertical Corner | | Black | Aluminium | ILAR-03348 |
|  | 20mm Trim 90° Horizontal Corner | | White | Aluminium | ILAR-03349 |
|  | 20mm Trim 90° Horizontal Corner | | Black | Aluminium | ILAR-03350 |



## ACCESSORIES 48V IP20

| | | Size | Housing Colour | Body Material | SKU |
|---|---|---|---|---|---|
| **SURFACE TRACKS AND CORNERS** | | | | | |
|  | 20mm Surf Track | | 2000mm | Aluminium | ILAR-03351 |
|  | 20mm Surf Track | | 2000mm | Aluminium | ILAR-03352 |
|  | 20mm Surf 90° Corner Connect Module | | White | Aluminium | ILAR-03353 |
|  | 20mm Surf 90° Corner Connect Module | | Black | Aluminium | ILAR-03354 |
|  | 20mm Surf 90° Vertical Corner | | White | Aluminium | ILAR-03355 |
|  | 20mm Surf 90° Vertical Corner | | Black | Aluminium | ILAR-03356 |
|  | 20mm Surf 90° Horizontal Corner | | White | Aluminium | ILAR-03357 |
|  | 20mm Surf 90° Horizontal Corner | | Black | Aluminium | ILAR-03358 |
| **RECESSED TRACKS AND CORNERS** | | | | | |
|  | 20mm Recess Track | 2000mm | White | Aluminium | ILAR-03359 |
|  | 20mm Recess Track | 2000mm | Black | Aluminium | ILAR-03360 |
|  | 20mm Recess 90° Vertical Corner | | White | Aluminium | ILAR-03361 |
|  | 20mm Recess 90° Vertical Corner | | Black | Aluminium | ILAR-03362 |
|  | 20mm Recess 90° Horizontal Corner | | White | Aluminium | ILAR-03363 |
|  | 20mm Recess 90° Horizontal Corner | | Black | Aluminium | ILAR-03364 |

# ACCESSORIES 48V IP20

| | | Size | Housing Colour | Body Material | SKU |
|---|---|---|---|---|---|
| **CONNECTION ACCESSORIES** | | | | | |
|  | 20mm Mini Wired Connect Module | | White<br>White | Aluminium | ILAR-03369 |
|  | 20mm Mini Wired Connect Module | | Black<br>Black | Aluminium | ILAR-03370 |
|  | 20mm Straight Connect Module | | White | Aluminium | ILAR-03371 |
|  | 20mm Straight Connect Module | | Black | Aluminium | ILAR-03372 |
|  | 20mm Input Connect Module | | White | Aluminium | ILAR-03373 |
|  | 20mm Input Connect Module | | Black | Aluminium | ILAR-03374 |
|  | 20mm Input Wired Connect Module | | White | Aluminium | ILAR-03375 |
|  | 20mm Input Wired Connect Module | | Black | Aluminium | ILAR-03376 |
|  | 20mm Central Corner Connect Module | | White | Aluminium | ILAR-03377 |
|  | 20mm Central Corner Connect Module | | Black | Aluminium | ILAR-03378 |
|  | 20mm Long Wired Connect Module | | White | Aluminium | ILAR-03379 |
|  | 20mm Long Wired Connect Module | | Black | Aluminium | ILAR-03380 |



# ACCESSORIES 48V IP20

| | | Size | Housing Colour | Body Material | SKU |
|---|---|---|---|---|---|
| **INTRACK POWER SUPPLIES** | | | | | |
|  | 20mm Intrack Power Supply 100W | | White | Aluminium | ILAR-03386 |
|  | 20mm Intrack Power Supply 100W | | Black | Aluminium | ILAR-03387 |
|  | 20mm Intrack Power Supply 200W | | White | Aluminium | ILAR-03388 |
|  | 20mm Intrack Power Supply 200W | | Black | Aluminium | ILAR-03389 |
| **EMBELLISHMENT COVERS** | | | | | |
|  | 20mm Cover Susp/Trim/Recess | 1000mm | White | Aluminium | ILAR-03365 |
|  | 20mm Cover Susp/Trim/Recess | 1000mm | Black | Aluminium | ILAR-03366 |
|  | 20mm Cover Surf | 1000mm | White | Aluminium | ILAR-03367 |
|  | 20mm Cover Surf | 1000mm | Black | Aluminium | ILAR-03368 |
| **MOUNTING ACCESSORIES** | | | | | |
|  | 20mm Track Plate Connector | | White | Aluminium | ILAR-03381 |
|  | 20mm Track Plate Connector | | Black | Aluminium | ILAR-03382 |
|  | 20mm Sus KIT | | | Aluminium | ILAR-03383 |
|  | 20mm Sus KIT | | | Aluminium | ILAR-03384 |
|  | 20mm Recess/Trim Kit | | | Aluminium | ILAR-03385 |

110—119





# INTERIOR

## TRACKLIGHT


ALL LIGHTING SOLUTIONS

## PRADO PRO










| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminium | 36° | IP20 | Tracklight |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 20W | 3CCT 3000K-4000K-6000K | 1900lm | Black | ILAR-02870 |
| | | | White | ILAR-02871 |
| 30W | | 3150lm | Black | ILAR-02872 |
| | | | White | ILAR-02873 |

**Options (Not included)**



Ring+Honeycomb
Black - 20W
ILAR-02874



Ring+Honeycomb
White - 20W
ILAR-02875



Ring+Honeycomb
Black - 30W
ILAR-02876



Ring+Honeycomb
White - 30W
ILAR-02877



## PRADO ZOOM






| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminium | 20°-60° | IP20 | Tracklight |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 20W | 3CCT 3000K-4000K-6000K | 1900lm | Black | ILAR-02833 |
| | | | White | ILAR-02832 |
| 30W | | 3150lm | Black | ILAR-02839 |
| | | | White | ILAR-02840 |

**Options (Not included)**



Ring+Honeycomb
Black - 20W
ILAR-02835



Ring+Honeycomb
White - 20W
ILAR-02834



Ring+Honeycomb
Black - 30W
ILAR-02842




Ring+Honeycomb
White - 30W
ILAR-02841



## PRADO SMART









| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminium | 36° | IP20 | Tracklight |


| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 30W | 3CCT 2700K-6500K | 1890lm | Black | ILAR-01734 |
| | | | White | ILAR-01735 |
| 30W | RGB+CCT 2700K-6500K | | Black | ILAR-01788 |
| | | | White | ILAR-01736 |

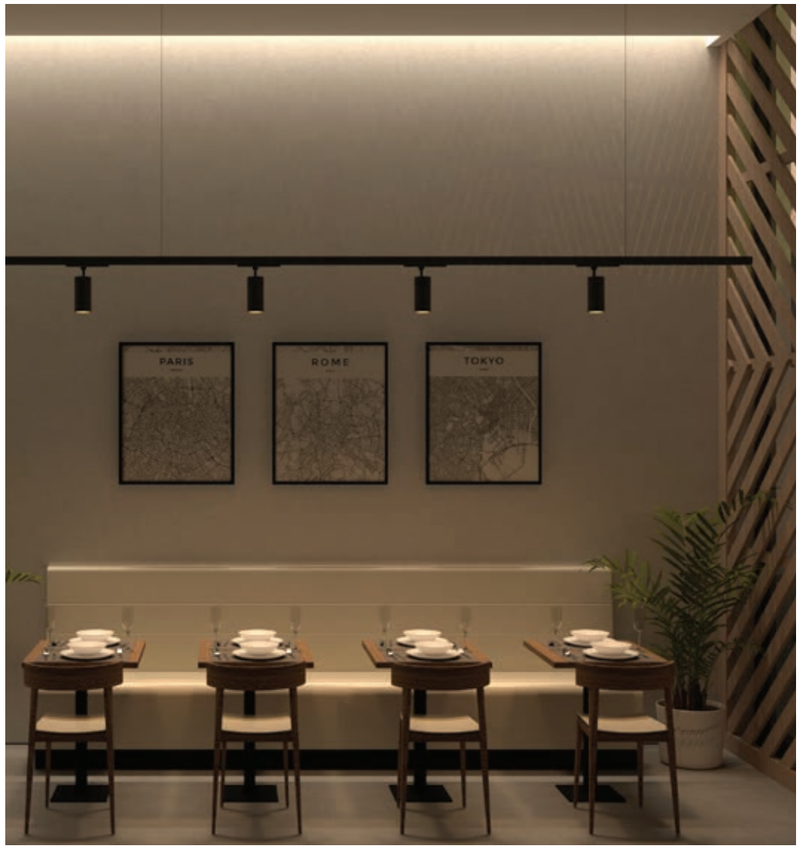


## NATAN GU10









| Voltage | Body Material | IP | Mounting Type |
|---|---|---|---|
| 110-220V | Aluminium | IP20 | Tracklight |

| Power | Type of Bulb | Housing Colour | SKU |
|---|---|---|---|
| Max. 7W | 1x GU10 | White RAL 9016 | ILAR-00884 |
| | | Black RAL 9005 | ILAR-00950 |

*Lamps Not Included

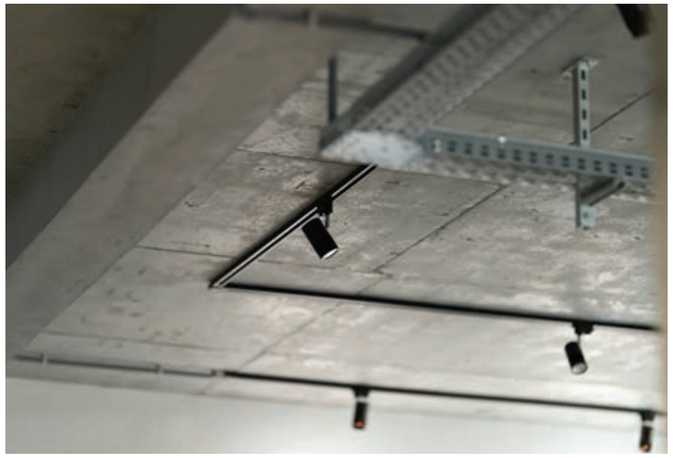

## LINEA






| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminium | 120° | IP20 | Tracklight |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 24W-18W | 3CCT 3000K-4000K-6000K | 3600lm | White RAL 9016 | ILAR-02869 |

## 3-PHASE TRACKLIGHT

| | | Mounting Type | Size | Housing Colour | Body Material | IP | SKU |
|---|---|---|---|---|---|---|---|
|  | Tracklight | Surface | 1000mm | White | Aluminium | IP20 | ILAR-00590 |
| | Tracklight | Surface | 2000mm | White | Aluminium | IP20 | ILAR-00591 |
|  | Tracklight | Recessed | 1000mm | White | Aluminium | IP20 | ILAR-00592 |
| | Tracklight | Recessed | 2000mm | White | Aluminium | IP20 | ILAR-00593 |
|  | Cap | | 1000mm | White | Plastic | IP20 | ILAR-02946 |
|  | Tracklight | Surface | 1000mm | Black | Aluminium | IP20 | ILAR-01006 |
| | Tracklight | Surface | 2000mm | Black | Aluminium | IP20 | ILAR-01007 |
|  | Cap | | 1000mm | Black | Plastic | IP20 | ILAR-02947 |

## ACCESSORIES FOR 3-PHASE TRACKLIGHT

| | | Housing Colour | Body Material | IP | SKU |
|---|---|---|---|---|---|
|  | Power Supply Left side | White | Aluminium | IP20 | ILAR-00594 |
|  | Power Supply Left side | Black | Aluminium | IP20 | ILAR-01011 |
|  | Internal Tracklight Union | White | Aluminium | IP20 | ILAR-00596 |
|  | Internal Tracklight Union - Recessed | White | Aluminium | IP20 | ILAR-01145 |
|  | Internal Tracklight Union | Black | Aluminium | IP20 | ILAR-01083 |
|  | Middle Tracklight Union | White | Aluminium | IP20 | ILAR-00597 |
|  | Middle Tracklight Union | Black | Aluminium | IP20 | ILAR-01084 |
|  | Jointed Union Tracklight | White | Aluminium | IP20 | ILAR-01389 |
|  | Jointed Union Tracklight | Black | Aluminium | IP20 | ILAR-02679 |
|  | “L” Tracklight Union Left side | White | Aluminium | IP20 | ILAR-00598 |



## ACCESSORIES FOR 3-PHASE TRACKLIGHT

| | | Housing Colour | Body Material | IP | SKU |
|---|---|---|---|---|---|
|  | “L” Tracklight Union Left side | Black | Aluminium | IP20 | ILAR-01171 |
|  | “L” Tracklight Union Three-Phase - Recessed | White | Aluminium | IP20 | ILAR-02570 |
|  | “T” Tracklight Union Left side | White | Aluminium | IP20 | ILAR-00599 |
|  | “T” Tracklight Union Left side | Black | Aluminium | IP20 | ILAR-01453 |
|  | “+” Tracklight Union Left side | White | Aluminium | IP20 | ILAR-00600 |
|  | “+” Tracklight Union Left side | Black | Aluminium | IP20 | ILAR-01454 |
|  | Adapter with Connection for Three-Phase Tracklight | Black | Aluminium+PC | IP20 | ILAR-01215 |
|  | Adapter with Connection for Three-Phase Tracklight | White | Aluminium+PC | IP20 | ILAR-01216 |
|  | Adapter with Schuko | White | Aluminium+PC | IP20 | ILAR-02950 |
|  | Adapter with Schuko | Black | Aluminium+PC | IP20 | ILAR-02951 |
|  | Round Base Recessed Three-Phase | White | Aluminium+PC | IP20 | ILAR-02948 |
|  | Round Base Recessed Three-Phase | Black | Aluminium+PC | IP20 | ILAR-02949 |
|  | End Cap | White | Plastic | IP20 | ILAR-00595 |
|  | End Cap | Black | Plastic | IP20 | ILAR-01012 |
|  | Suspension Tracklight | White | Aluminium+PC | IP20 | ILAR-01141 |
|  | Suspension Tracklight | Black | Aluminium+PC | IP20 | ILAR-01142 |
|  | Accessory for Fixing Three-Phase Recessed Rail | | Aluminium | IP20 | ILAR-02302 |

## TRUNKING LIGHT







| Voltage | Body Material | IP | Mounting Type |
|---|---|---|---|
| 170-265V | Steel | IP20 | Suspended |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Beam Angle | Housing Colour | SKU |
|---|---|---|---|---|---|---|
| 50W | 4000K | 8000lm | 1500x70x76mm | 90° | White | ILAR-00760 |
| | | | | 120° | | ILAR-00761 |
| 50W - Emergency | | | | 120° | | ILAR-01640 |

**Options (Not included)**



Final Rail Module
5 Wires - 1.5m
ILAR-00763



Linear Rail Module
5 Wires - 1.5m
ILAR-00762



Conector Feed-in
ILAR-00764



Suspending Kit
ILAR-00766



End Cap
ILAR-00765



Rail Cover
1500mm




Emergency Kit



1-10V
Dimming Driver



Linear Rail for Track Light
*Lamp not included

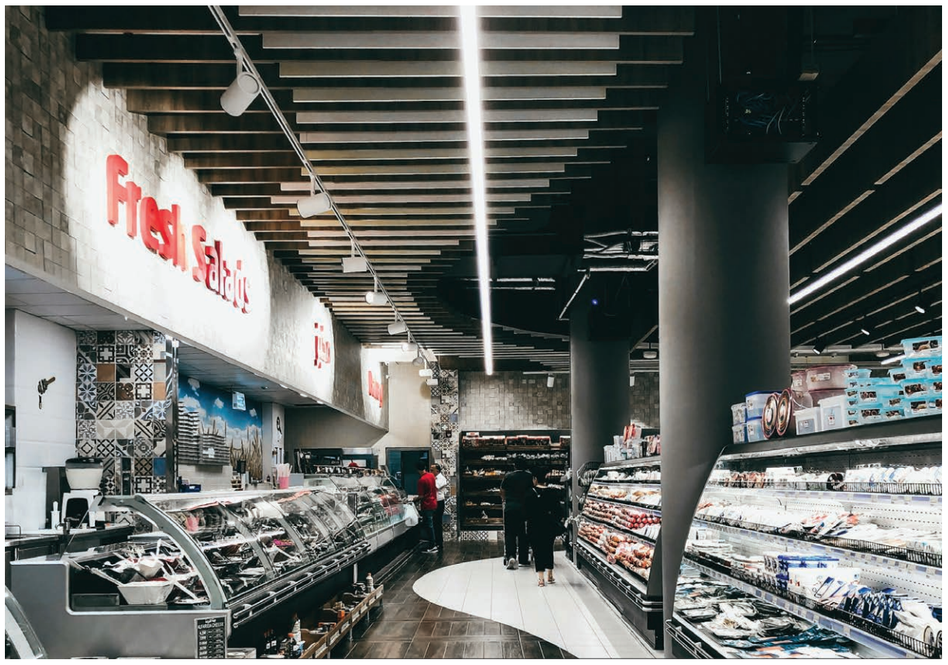





## SENA







| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Die-cast Aluminum and PC Reflector | 75° | IP40 | Suspended |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| Switch 60W-35W-25W | 3CCT 3000K-4000K-5000K | 7800/4550/3250lm | White | ILAR-02128 |

120—143

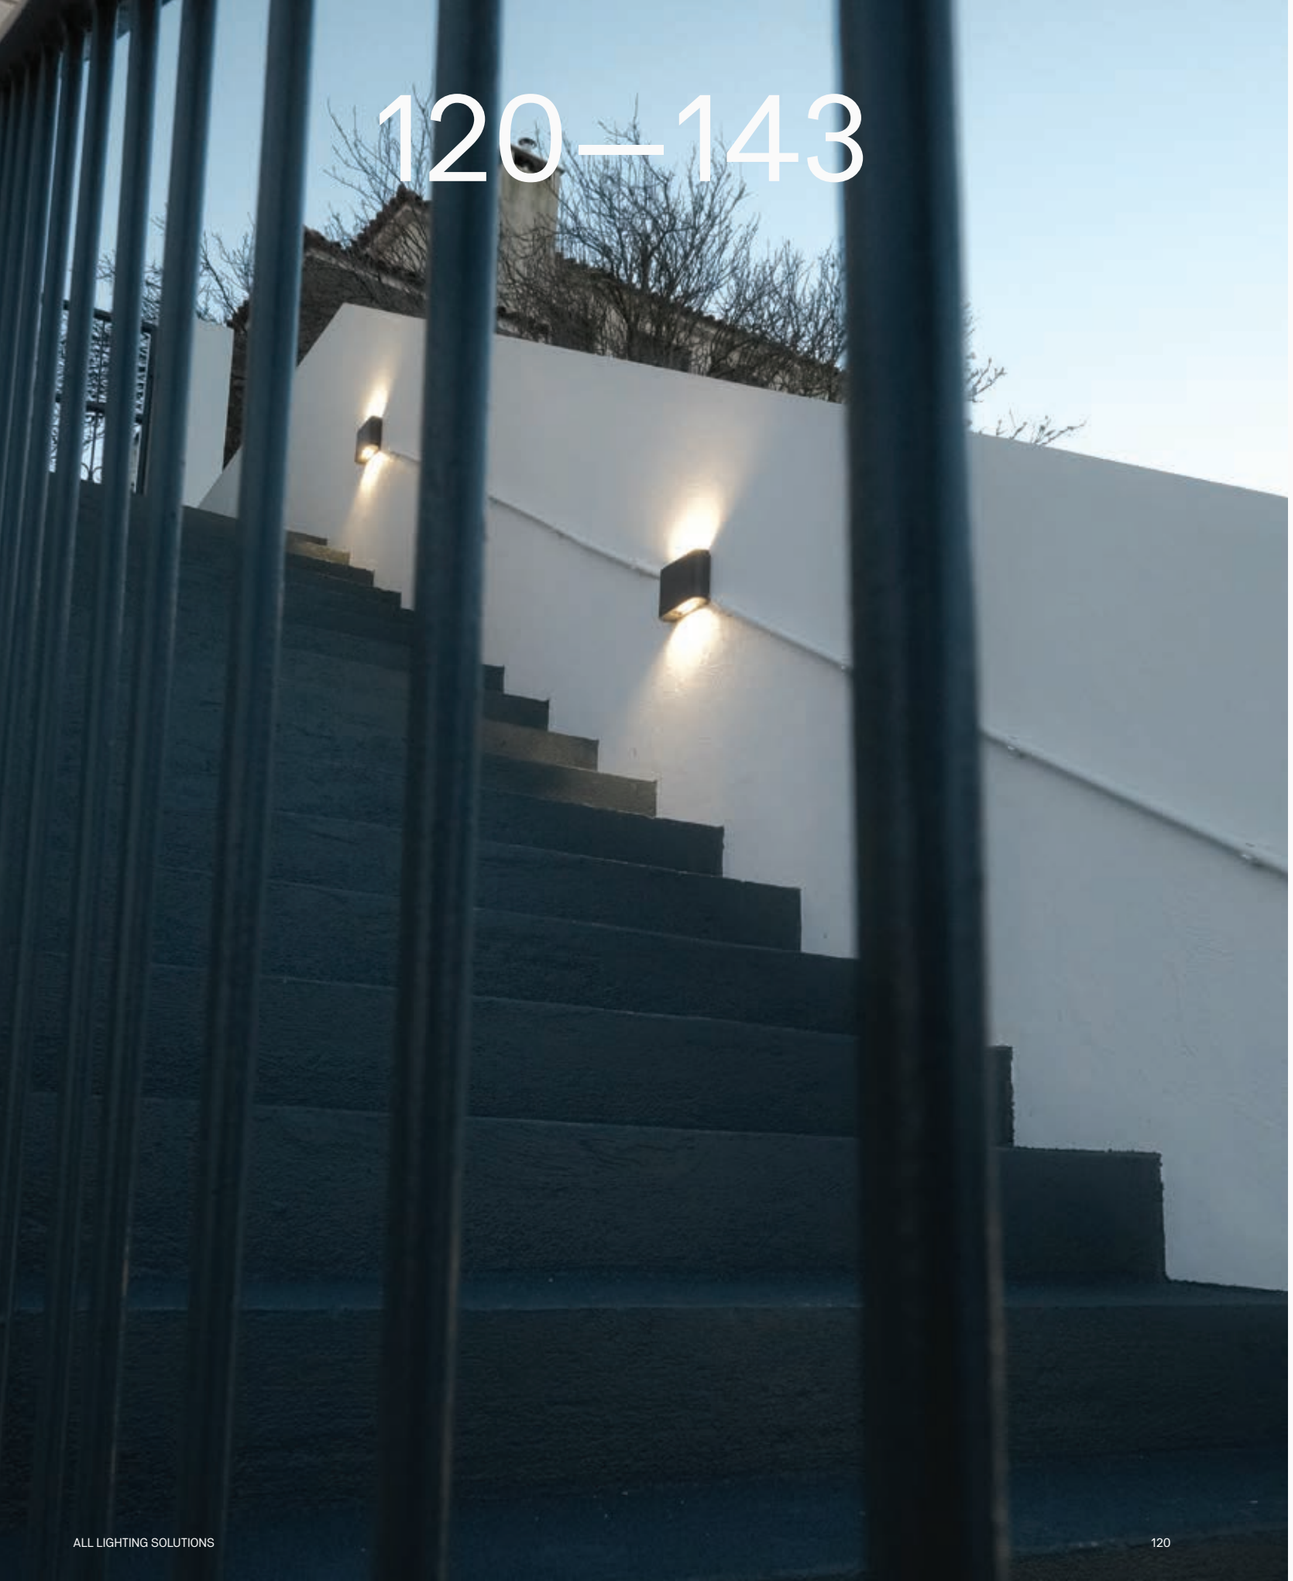


# EXTERIOR

## WALL SURFACE

ALL LIGHTING SOLUTIONS

## CHUNK






| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminium Alloy | 30° | IP66 | Surface |


| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| Power Switch 40W-36W-30W-25W-20W | 3CCT 2700K-3000K-4000K | 4800lm | Dark Grey | ILAR-02625 |



## CLIF









| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Die-casting aluminium | 80° | IP65 | Wall Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 20W | 3000K | 1950lm | Grey | ILAR-03716 |
| 2x 20W | 3000K | 3800lm | Grey | ILAR-03717 |

## HARPE






| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminium | 97° | IP65 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 2x 6W | 3000K | 900lm | Grey | ILAR-00962 |
| 6W | | 450lm | | ILAR-00961 |






## PINE / ALDER









| Voltage | Body Material | IP | Mounting Type |
|---|---|---|---|
| 100-240V | Die-casting Aluminium | IP65 | Surface |

| Model | Power | Type Of Bulb | Size | Housing Colour | SKU |
|---|---|---|---|---|---|
| Alder | MAX 35W | 1x GU10 | 78x70x100mm | Grey | ILAR-00811 |
| | | | | White | ILAR-03714 |
| Pine | MAX 2x 35W | 2x GU10 | 78x70x165mm | Grey | ILAR-00810 |
| | | | | White | ILAR-03713 |

*Lamps not included.

## PARKE GU10






| Voltage | Body Material | IP | Mounting Type |
|---|---|---|---|
| 100-240V | Die-casting Aluminium | IP44 | Surface |


| Power | Type Of Bulb | Size | Housing Colour | SKU |
|---|---|---|---|---|
| MAX 35W | 1x GU10 | 90x80x67mm | Grey | ILAR-00965 |
| | | | White | ILAR-00966 |
| MAX 2x 35W | 2x GU10 | 90x156x67mm | Grey | ILAR-00967 |
| | | | White | ILAR-00968 |

*Lamps not included.



## BAO







| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Die-Casting Aluminium | 2x 0-90° | IP65 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 12W | 3000K | 440lm | Grey | ILAR-00816 |



## ABRITER







| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 100-240V | Aluminium Alloy | 120° | IP66 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 12W | RGB + CCT<br>2700K-6500K | 1000lm | Black | ILAR-02282 |



## FISHER






| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Die-Casting Aluminium | 90° | IP54 | Surface |


| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 10W | 3000K | 900lm | Grey | ILAR-00959 |
| | | | White | ILAR-00960 |



## CANNA PRO







| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 200-240V | Die-Casting Aluminium | 115-110°<br>Asymmetric 40° | IP65 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 15W | 3CCT 2700K-3200K-4000K | 900-1200lm | White | ILAR-03683 |
| | | | Black | ILAR-03684 |
| | | | Grey RAL7016 | ILAR-03685 |

## ARCO









| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminium | 110° | IP65 | Wall Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 10W | 2700K | 715lm | White | ILAR-02771 |
| | | | Antracite | ILAR-02772 |



## KANE WALL







| Voltage | Body Material | IP | Mounting Type |
|---|---|---|---|
| 100-240V | Aluminium | IP65 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 10W | 2CCT 3000K-4000K | 650lm | Grey RAL 7016 | ILAR-01682 |



## ALFA WALL







| Voltage | Body Material | IP | Mounting Type |
|---|---|---|---|
| 100-240V | Aluminium | IP65 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 13W | 3000K | 850lm | Grey RAL 7016 | ILAR-01684 |



## LINCE




| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminum | 120° | IP65 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 14W | 3000K | 1290lm | Black | ILAR-02079 |



## LOG




| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminum | 120° | IP65 | Surface |


| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 18W | 3000K | 1840lm | Black | ILAR-02080 |





## TAKO







| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Die-Casting Aluminium | 104° | IP54 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 2x 5W | 3000K | 600lm | Black | ILAR-00963 |
| | | | White | ILAR-00964 |



## LYRA






| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminum | 15°-120° | IP65 | Wall Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 10W | 2700K | 750lm | White | ILAR-00769 |
| | | | Black | ILAR-00860 |
| 10W | 4000K | 900lm | White | ILAR-00861 |
| | | | Black | ILAR-00770 |





## AXEL



| Voltage | Body Material | IP | Beam Angle | Mounting Type |
|---|---|---|---|---|
| 220-240V | Die-Casting Aluminium | IP65 | 2x 0-100° | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 2x 6W | 3000K | 415lm | Grey | ILAR-00815 |
| | | | White | ILAR-03715 |



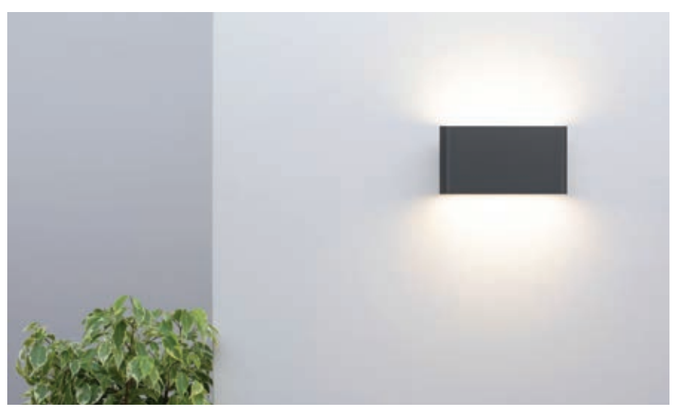



## NUT



| Voltage | Body Material | IP | Beam Angle | Mounting Type |
|---|---|---|---|---|
| 220-240V | Die-Casting Aluminium | IP54 | 2x 110° | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 2x 3W | 3000K | 450lm | Grey | ILAR-00814 |










## THULE



| Voltage | Body Material | IP | Beam Angle | Mounting Type |
|---|---|---|---|---|
| 220-240V | Die-Casting Aluminium | IP54 | 120° | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 12W | 3000K | 415lm | Grey | ILAR-00820 |



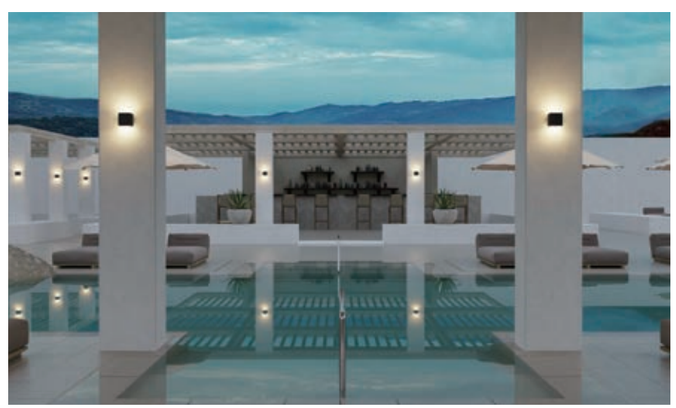



## AXIS



| Voltage | Body Material | IP | Beam Angle | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminium | IP65 | 36° | Surface |

| Model | Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|---|
| Single | 5W | 3000K | 45lm | Matt Black | ILAR-02237 |
| Double | 10W | | 88lm | | ILAR-02238 |







## ARI



| Voltage | Body Material | IP | Mounting Type |
|---|---|---|---|
| 100-240V | Aluminium/Glass | IP65 | Surface |

| Power | Type Of Bulb | Size | Housing Colour | SKU |
|---|---|---|---|---|
| MAX 25W | 1x E27 | 140x260x136mm | Grey | ILAR-00882 |

*Lamps not included.







## GATE



| Voltage | Body Material | IP | Mounting Type |
|---|---|---|---|
| 100-240V | Aluminium/Glass | IP65 | Surface |

| Power | Type Of Bulb | Size | Housing Colour | SKU |
|---|---|---|---|---|
| MAX 60W | 1x E27 | 140x140x400mm | Grey | ILAR-00951 |

*Lamps not included.








## TULIP




| Voltage | Body Material | IP | Mounting Type |
|---|---|---|---|
| 100-240V | Die-Casting Aluminium | IP54 | Surface |

| Power | Type Of Bulb | Size | Housing Colour | SKU |
|---|---|---|---|---|
| MAX 35W | 1x GU10 | Ø60x112x95x555mm | Grey | ILAR-00824 |

*Lamps not included.

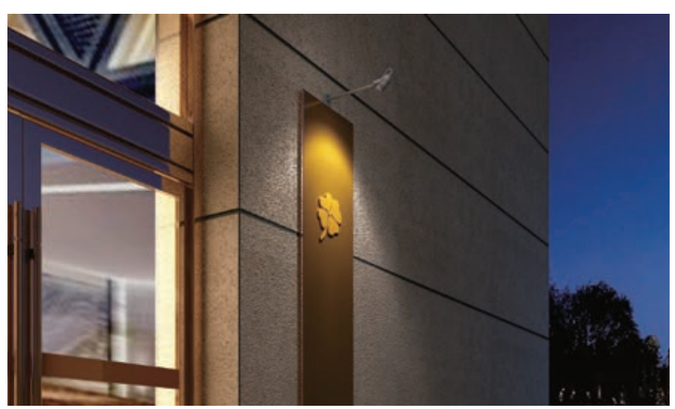


## ELM



| Voltage | Body Material | IP | Mounting Type |
|---|---|---|---|
| 100-240V | Die-Casting Aluminium | IP54 | Surface |

| Power | Type Of Bulb | Size | Housing Colour | SKU |
|---|---|---|---|---|
| MAX 35W | 1x GU10 | Ø65x90x55x115mm | Grey | ILAR-00823 |


*Lamps not included.







## STUDE






| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 100-240V | Die-Cast Aluminum | 180° | IP65 | Surface |


| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 8W | 3000K | 600-670lm | Grey RAL 7016 | ILAR-01109 |

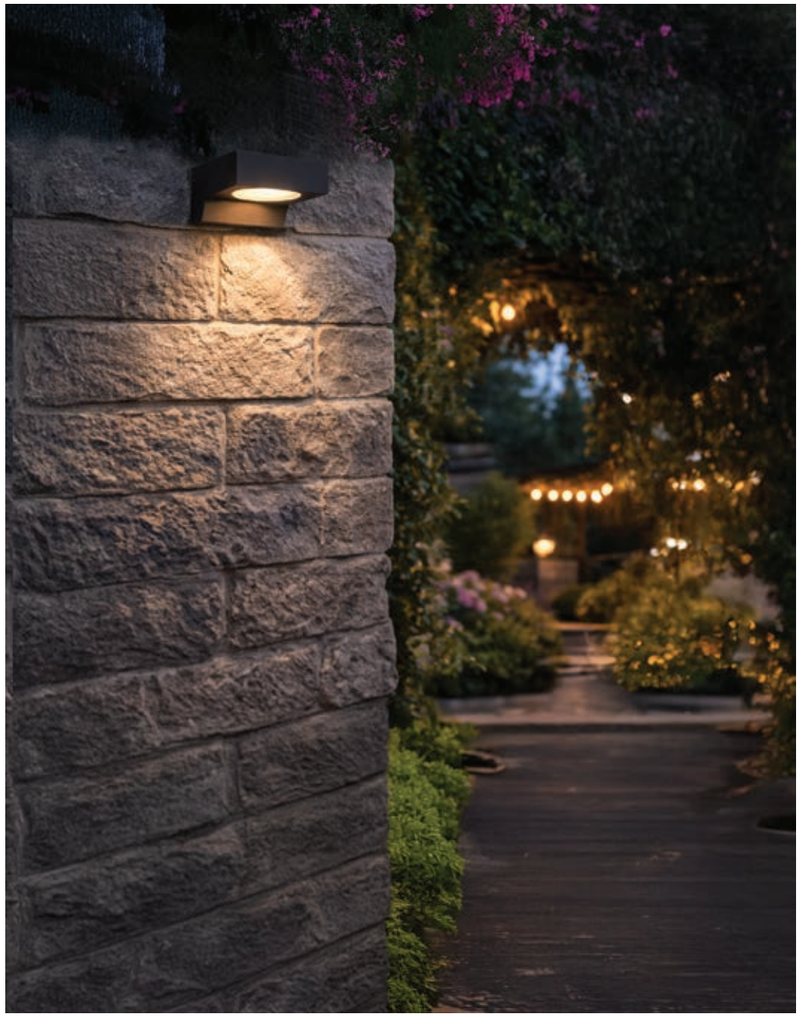

## ARLO









| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | ABS + PC | 120° | IP65 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 21W | 3CCT 3000K-4000K-6500K | 1300lm | White | ILAR-02576 |
| | | | Grey | ILAR-02575 |

## ST53KH LUMINAIRE







| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | ABS + PC | 120° | IP65 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| Switch 12W/15W/20W | 4000K | 1200-1500-2000lm | White | ILAR-02764 |

## NORA









| Voltage | Body Material | IP | Mounting Type |
|---|---|---|---|
| 100-240V | ABS + PC | IP54 | Surface |

| Power | Type Of Bulb | Size | Housing Colour | SKU |
|---|---|---|---|---|
| MAX 60W | 1x E27 | 223x170x243mm | White | ILAR-00978 |
| | | | Black | ILAR-00979 |

*Lamps not included.

## PHIL







| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | ABS + PC | 120° | IP54 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 8W | 4500K | 560lm | White | ILAR-00955 |
| 12W | | 840lm | | ILAR-00879 |

## FENIX






| Voltage | Body Material | IP | Mounting Type |
|---|---|---|---|
| 100-240V | ABS + PC | IP65 | Surface |


| Power | Type Of Bulb | Size | Housing Colour | SKU |
|---|---|---|---|---|
| MAX 35W | 1x E27 | 220x130x91mm | White | ILAR-00352 |

*Lamps not included.

## NOA









| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | ABS + PC | 120° | IP65 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 12W | 3CCT 3000K-<br>4000K-6500K | 1200lm | Grey<br>White | ILAR-02083<br>ILAR-02683 |



## CANNA








| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | ABS + PC | 120° | IP65 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 12W | 3CCT 3000K-<br>4000K-6500K | 800lm | Grey<br>White | ILAR-02519<br>ILAR-01674 |

## IVY / HANA








| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | ABS + PC | 120° | IP65 | Surface |

| Model | Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|---|
| IVY | 8W | 4000K | 700lm | Grey | ILAR-00796 |
| HANA | 8W | | 670lm | | ILAR-00797 |

## INDIGO







| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | ABS + PC | 120° | IP65 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 12W | 4000K | 700lm | Grey | ILAR-00798 |
| | 3CCT 3000K-4000K-6500K | 700lm | Grey | ILAR-03652 |
| | 3CCT 3000K-4000K-6500K | 700lm | Black | ILAR-02816 |

## AVENCA







| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | ABS + PC | 104° | IP65 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 6W | 3CCT 3000K-4000K-6500K | 480lm | White | ILAR-01662 |
| | | | Black | ILAR-02065 |
| 6W (Sensor) | 3CCT 3000K-4000K-6500K | 480lm | White | ILAR-02682 |

## CARMO







Ø135x32mm



120x120x32mm


| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | ABS + PC | 110° | IP65 | Surface |

| Model | Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|---|
| Square | 3W | 3CCT 3000K-4000K-6500K | 100lm | White | ILAR-02677 |
| | | | 100lm | Grey | ILAR-02678 |
| | | 4000K | 100lm | Grey | ILAR-00974 |
| Round | 3W | 3CCT 3000K-4000K-6500K | 100lm | White | ILAR-02573 |
| | | | | Grey | ILAR-02574 |



## ASTER







| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | ABS + PC | 120° | IP65 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 4W | 3CCT 3000K-<br>4000K-6500K | 220lm | White<br>Grey | ILAR-02012<br>ILAR-01675 |

## JADE







| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | ABS + PC | 120° | IP65 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 4W | 3CCT 3000K-<br>4000K-6500K | 280lm | White<br>Grey<br>Black | ILAR-01641<br>ILAR-01497<br>ILAR-01642 |

## HERA






| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | ABS + PC | 32° | IP65 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 2W | 3CCT 3000K-<br>4000K-6500K | 120lm | White<br>Grey<br>Black | ILAR-01498<br>ILAR-01673<br>ILAR-01816 |

144—159

# EXTERIOR

## RECESSED


ALL LIGHTING SOLUTIONS

## NIXEN



| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 85-265V | Die-cast Aluminum | 90° | IP65 | Recessed |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Cut-out | Housing Colour | SKU |
|---|---|---|---|---|---|
| 6W | 3000K | 480lm | 250x70mm | Grey | ILAR-02203 |







## LEIA



| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 85-265V | Die-cast Aluminum | 90° | IP65 | Recessed |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Cut-out | Housing Colour | SKU |
|---|---|---|---|---|---|
| 3W | 3000K | 240lm | 99x50x50mm | Grey | ILAR-02204 |









## VOXEL



| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | ABS + PC | 120° | IP65 | Recessed |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Cut-out | Housing Colour | SKU |
|---|---|---|---|---|---|
| 3W | 3CCT 3000K<br>4000K-6500K | 220lm | 130x40x62mm | Black | ILAR-01499 |






## VITA



| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Die-cast Aluminum | 110° | IP65 | Recessed |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Cut-out | Housing Colour | SKU |
|---|---|---|---|---|---|
| 11W | 3000K | 680lm | 251x72mm | Grey | ILAR-00821 |







## CUADRADO








| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminium | 120° | IP65 | Recessed |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Cut-out | Housing Colour | SKU |
|---|---|---|---|---|---|---|
| 20W | 3CCT 3000K-4000K-6500K | 1200lm | 200x200x95mm | 190x190x80mm | White | ILAR-02145 |
| | | | | | Grey | ILAR-02146 |



## CEDAR



| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Die-casting Aluminium | 100° | IP65 | Recessed |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Cut-out | Housing Colour | SKU |
|---|---|---|---|---|---|---|
| 3W | 3000K | 100lm | 80x80x46mm | Ø74mm | Grey | ILAR-00822 |



80x80mm








## SKILL















| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | PC+ABS Housing, PC Diffuser | 110° | IP65 | Recessed |

| Model | Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Cut-out | Housing Colour | SKU |
|---|---|---|---|---|---|---|---|
| Skill 1x E27 | 9W Max. | 1x E27 | | 247x108x88mm | 230x94x85mm | White RAL 9016 | ILAR-02936 |
| | | | | | | Black RAL 9005 | ILAR-02937 |
| | | | | | | Stainless Steel | ILAR-02938 |
| Skill | 10W | 3CCT 3000K-4000K-6500K | 380lm | 247x108x88mm | 230x94x85mm | White RAL 9016 | ILAR-02939 |
| | | | | | | Black RAL 9005 | ILAR-02940 |
| | | | | | | Stainless Steel | ILAR-02941 |
| Skill Brick | 10W | 3CCT 3000K-4000K-6500K | 380lm | 247x108x88mm | 230x94x85mm | White RAL 9016 | ILAR-02942 |
| | | | | | | Black RAL 9005 | ILAR-02943 |

**Options (Included / Incluídas / Incluido)**



Recessed Box
ILAR-02944



## SPOTLIGHT 12V







| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| DC12V | Aluminium | 36° | IP66 | Inground/Recessed |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Cut-out | Housing Colour | SKU |
|---|---|---|---|---|---|
| 3W | CCT 2700K-6500K | 154lm | Ø33-36mm | Grey | ILAR-01731 |
| | RGB | | | | ILAR-01732 |
| | RGBW | | | | ILAR-01733 |


**Options (Not included)**




Power Cable for
ILAR-01731 (CCT)
ILAR-01874



Extension Cable for
ILAR-01731 (CCT)
ILAR-01875




Power Cable for
ILAR-01732 (RGB)
ILAR-01876



Extension Cable for
ILAR-01732 (RGB)
ILAR-01877



Power Cable for
ILAR-01732 (RGB)
ILAR-01878




Extension Cable for
ILAR-01732 (RGB)
ILAR-01879







## MELLER

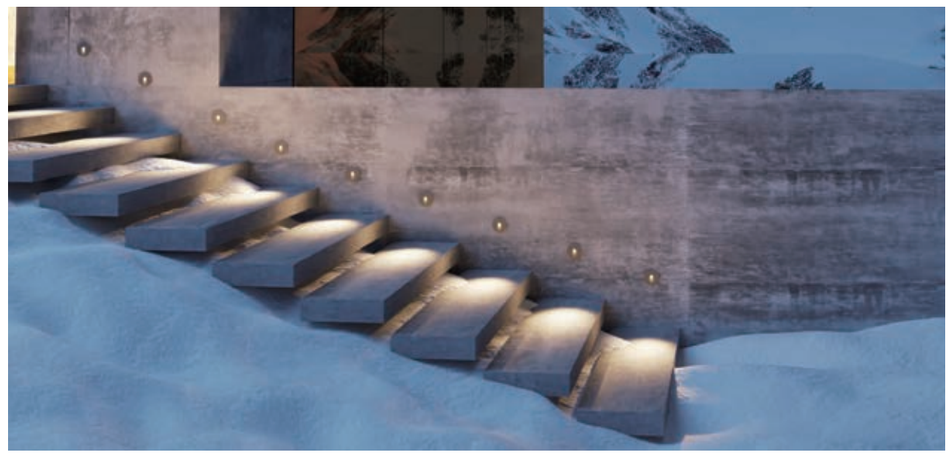








| Voltage | Body Material | Beam Angle | Sensor Distance | IP | Mounting Type |
|---|---|---|---|---|---|
| 175-265V | Die-cast Aluminum | 38° | 1-3m | IP65 | Recessed |

| Model | Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Cut-out | Housing Colour | SKU |
|---|---|---|---|---|---|---|---|
| Base | 3W | 3CCT 3000K-4000K-6000K | 120lm | Ø79mm | Ø59x54mm | Black | ILAR-01050 |
| Base | 2W (Sensor) | 3CCT 3000K-4000K-6000K | 100lm | 82.5mm | 62x37mm | Grey | ILAR-01230 |

**Options (Not included)**



Grey - Round
ILAR-01051



White - Round
ILAR-01052



Grey - Round
ILAR-01053



White - Round
ILAR-01054



Black - Round
ILAR-01098



Black - Round
ILAR-01164



Grey - Square
ILAR-01055



White - Square
ILAR-01056



Black - Square
ILAR-01097



Grey - Square
ILAR-01057



White - Square
ILAR-01058



Black - Square
ILAR-01099



Black - Sensor - Square
ILAR-01231




White - Sensor - Square
ILAR-01232

## MELLER II








| Voltage | Body Material | Beam Angle | Sensor Distance | IP | Mounting Type |
|---|---|---|---|---|---|
| 85-265V | Die-cast Aluminum | 10°-90° | 1-3m | IP65 | Recessed |

| Model | Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Cut-out | Housing Colour | SKU |
|---|---|---|---|---|---|---|---|
| Base | 3W | 3CCT 2700K-3000K-4000K | 240lm | 90x90x55mm | 80x80x50mm | Grey | ILAR-02862 |
| Base | 3W (Sensor) | 3CCT 3000K-4000K-6000K | 240lm | | | Black | ILAR-02189 |

**Options (Not included)**



White - Slot
ILAR-02173



Black - Slot
ILAR-02174



Grey - Slot
ILAR-02175



Golden - Slot
ILAR-02176



White - Oval
ILAR-02177



Black - Oval
ILAR-02178



Grey - Oval
ILAR-02179



Golden - Oval
ILAR-02180



White - Rectangle
ILAR-02181



Black - Rectangle
ILAR-02182



Grey - Rectangle
ILAR-02183



Golden - Rectangle
ILAR-02184



White - Trapezoid
ILAR-02185



Black - Trapezoid
ILAR-02186



Grey - Trapezoid
ILAR-02187



Golden - Trapezoid
ILAR-02188



Black - Sensor - Slot
ILAR-02190



Grey - Sensor - Oval
ILAR-02191



White - Sensor - Rectangle
ILAR-02192




Golden - Sensor - Trapezoid
ILAR-02193




## PINI







| Voltage | Body Material | Beam Angle | Sensor Distance | IP | Mounting Type |
|---|---|---|---|---|---|
| 85-265V | Aluminum | 38° | 1-3m | IP45 | Recessed |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Cut-out | Housing Colour | SKU |
|---|---|---|---|---|---|---|
| 3W | 3000K | 80lm | Ø45x60mm | Ø40x60mm | White | ILAR-02868 |
| | | | | | Black | ILAR-02866 |
| | | | | | Grey | ILAR-02864 |
| 3W (Sensor) | 3000K | 80lm | Ø45x60mm | Ø40x60mm | White | ILAR-02865 |
| | | | | | Black | ILAR-02863 |
| | | | | | Grey | ILAR-02867 |

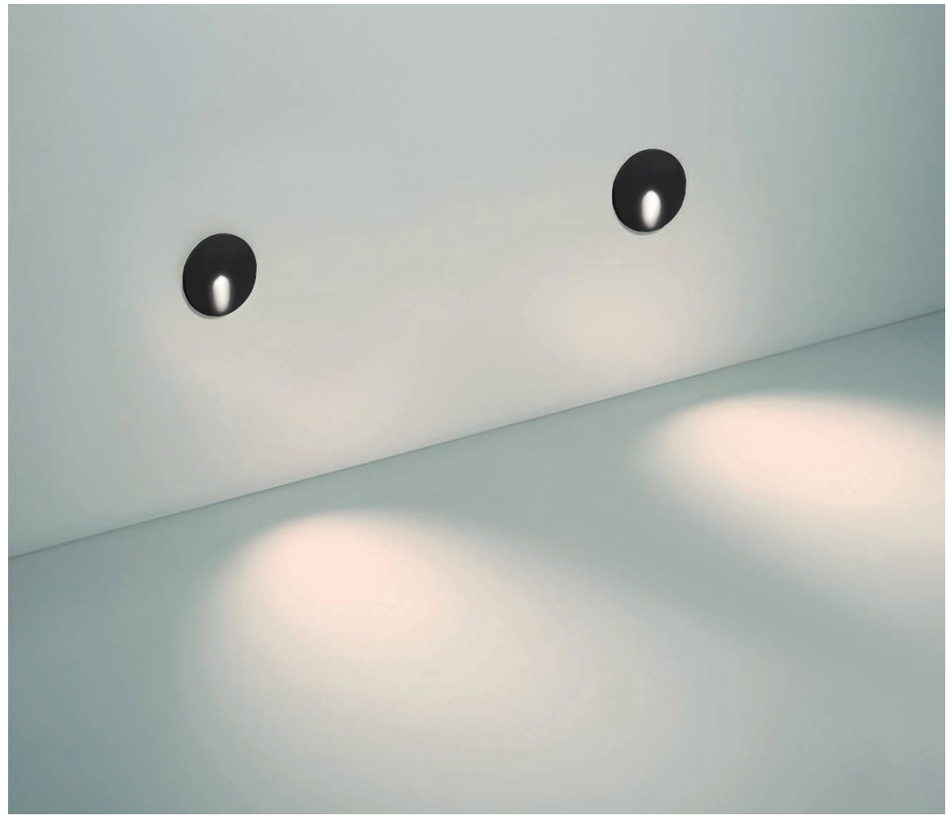

## SLIT







| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 85-265V | Aluminum | 10° | IP65 | Recessed |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Cut-out | Housing Colour | SKU |
|---|---|---|---|---|---|---|
| 3W | 3CCT 3000K-4000K-6000K | 240lm | 185x40x44mm | 170x33x41mm | White | ILAR-02194 |
| | | | | | Black | ILAR-02195 |
| | | | | | Grey | ILAR-02196 |
| 3W | 3CCT 2700K-3000K-4000K | 240lm | 185x40x44mm | 170x33x41mm | White | ILAR-02861 |
| | | | | | Black | ILAR-02859 |
| | | | | | Grey | ILAR-02860 |



## KATA

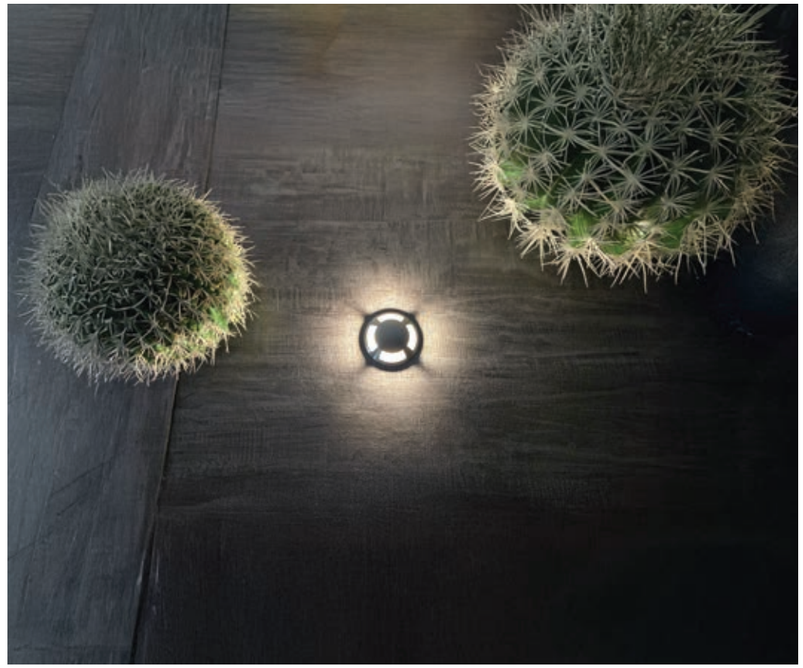









| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 24V | Aluminum + SS316 | Optional | IP67 | Recessed |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 2.7W | 3000K | 245lm | Grey | ILAR-03521 |

**Mandatory Options (Not included)**



| Flat Cover 360° | Cone Top Light Cover | 1-Way Cover | 2-Way Cover | 3-Way Cover | 4-Way Cover |
|---|---|---|---|---|---|
| ILAR-03522 | ILAR-03523 | ILAR-03524 | ILAR-03525 | ILAR-03526 | ILAR-03527 |


## VINI



| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 12V | Stainless Steel 316 | 120° | IP67 | Inground |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 3W | 3000K | 195lm | Stainless Steel | ILAR-01198 |

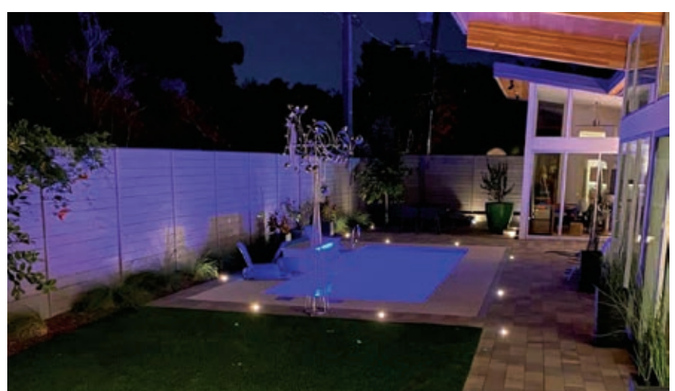


## KARI



| Voltage | Body Material | IP | Mounting Type |
|---|---|---|---|
| 110-220V | Aluminum + SS316 | IP67 | Inground |

| Power | Type of Bulb | Housing Colour | SKU |
|---|---|---|---|
| MAX 35W | 1x GU10 | Stainless Steel | ILAR-01167 |

*Lamps not included.









## OTTO



| Voltage | Body Material | IP | Mounting Type |
|---|---|---|---|
| 110-220V | Stainless steel 316 | IP66 | Inground |

| Power | Type of Bulb | Housing Colour | SKU |
|---|---|---|---|
| MAX 35W | 1x GU10 | Stainless Steel | ILAR-01166 |

*Lamps not included.







## OAK




| Voltage | Body Material | IP | Mounting Type |
|---|---|---|---|
| 110-220V | Stainless steel 316 | IP67 | Inground |

| Power | Type of Bulb | Housing Colour | SKU |
|---|---|---|---|
| MAX 35W | 1x GU10 | Stainless Steel | ILAR-00827 |

*Lamps not included.



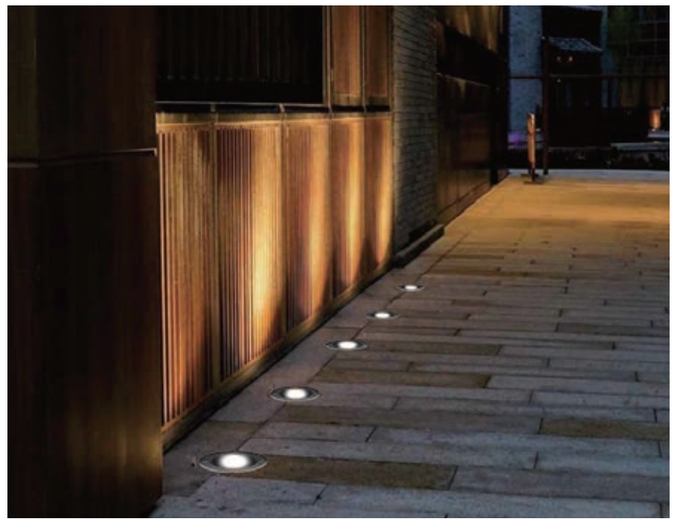
## JOCKA








| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V<br>24V | Stainless Steel+Aluminium | 25°/50°/120° | IP68 | Inground |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Cut-out | Housing Colour | SKU |
|---|---|---|---|---|---|---|
| 3W-6W | 2700K/3000K/ | 600lm Max. | Ø120x94mm | Ø100mm | Stainless Steel | On-request |
| 6W-12W | 4000K/RGBW | 1200lm Max. | Ø150x114mm | Ø133mm | Stainless Steel | On-request |
| 12W-25W | | 2500lm Max. | Ø180x125mm | Ø164mm | Stainless Steel | On-request |
| 25W-40W | | 4000lm Max. | Ø220x136mm | Ø204mm | Stainless Steel | On-request |
| 40W-60W | | 6000lm Max. | Ø260x136mm | Ø243mm | Stainless Steel | On-request |

**Options (Not included)**



Honeycomb
On-request




Difuser Optics
On-request



## OTTO ROTABLE







| Voltage | Body Material | Beam Angle | Tiltable Angle | IP | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | Die-casting Aluminium | 50° | +- 15° | IP68 | Inground |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 35W | 2CCT 3000K-4000K | 3850lm | Black & Stainless Steel | ILAR-02341 |

## ABBA







| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Stainless steel 316 | 120° | IP67 | Inground |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 24W | 3000K | 2060lm | Stainless Steel | ILAR-01197 |

## INGROUND SYS-RD








| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 24V | Stainless Steel+PC | 15° / 30° | IP68 | Recessed |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Cut-out | Housing Colour | SKU |
|---|---|---|---|---|---|---|
| 5W | RGB + CCT | 350lm | Ø100x74mm | Ø89mm | Stainless Steel | ILAR-02284 |
| 9W | RGB + CCT | 700lm | Ø150x104mm | Ø138mm | | ILAR-02285 |

**Mandatory (1 unity for 360W)**



SYS-T1 1-Channel Host Controller
ILAR-02620




# EXTERIOR


## SPOTS AND BOLLARDS

ALL LIGHTING SOLUTIONS

## LUPO









| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminium | 360° | IP65 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Housing Colour | SKU |
|---|---|---|---|---|---|
| 8.5W | 3000K | 680lm | 150x150mm | Matt Black | ILAR-02231 |
| 11W | 3000K | 880lm | 200x200mm | Matt Black | ILAR-02230 |
| 15W | 3000K | 1325lm | 300x300mm | Matt Black | ILAR-02229 |

## GARDEN LIGHT FUTC11






| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 100-240V | Aluminium | 60° | IP66 | Bracket/Spike |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 12W | RGB-CCT | 1100lm | Black | ILAR-01870 |



## HAZEL







| Voltage | Body Material | IP | Mounting Type |
|---|---|---|---|
| 220-240V | ABS + PC | IP66 | Bracket/Spike |

| Power | Type of Bulb | Housing Colour | SKU |
|---|---|---|---|
| MAX 7W | 1x GU10 | Black | ILAR-01676 |

*Lamps not included.

## SAGE







| Voltage | Body Material | IP | Mounting Type |
|---|---|---|---|
| 220-240V | ABS + PC | IP66 | Bracket/Spike |

| Power | Type of Bulb | Housing Colour | SKU |
|---|---|---|---|
| MAX 7W | 1x GU10 | Black | ILAR-01677 |

*Lamps not included.

## AGAVE GU10






| Voltage | Body Material | IP | Mounting Type |
|---|---|---|---|
| 220-240V | Plastic | IP66 | Bracket/Spike |

| Power | Type of Bulb | Housing Colour | SKU |
|---|---|---|---|
| MAX 7W | 1x GU10 | Black | ILAR-00339 |

*Lamps not included.


## AGAVE SMD






| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminium | 120° | IP66 | Bracket/Spike |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 3W | 4000K | 240lm | Black | ILAR-00359 |

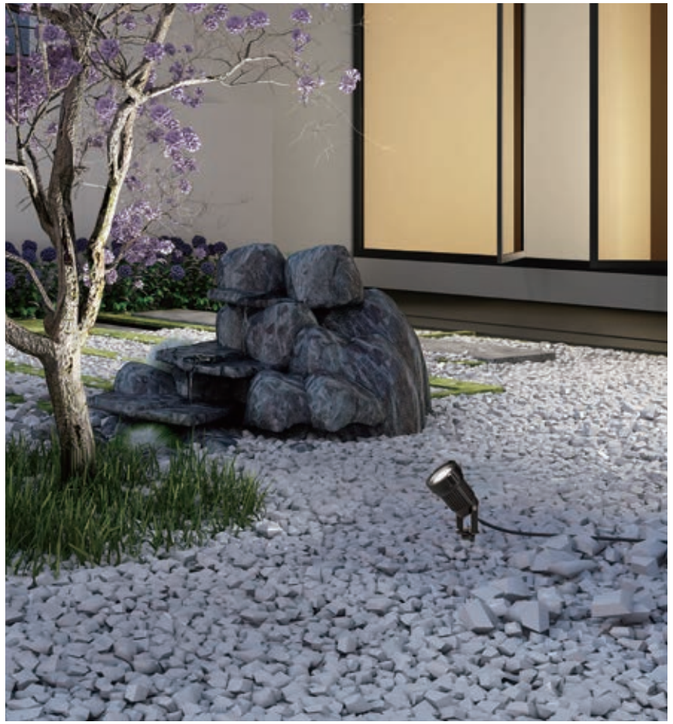

## SIG






| Voltage | Body Material | IP | Mounting Type |
|---|---|---|---|
| 100-240V | Die-casting Aluminium | IP54 | Bracket |


| Power | Type of Bulb | Housing Colour | SKU |
|---|---|---|---|
| MAX 35W | 1x GU10 | Grey | ILAR-01165 |

*Lamps not included.



## VALL II






| Voltage | Body Material | IP | Mounting Type |
|---|---|---|---|
| 100-265V | Aluminium | IP67 | Bracket |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | Beam Angle | SKU |
|---|---|---|---|---|---|
| 3W | 3000K | 190lm | Grey | 15° | ILAR-03731 |
| | | | Green RAL 6003 | | ILAR-03732 |
| | | | Corten | | ILAR-03733 |
| 8W | 3000K | 640lm | Grey | 36° | ILAR-03540 |
| | | | Green RAL 6003 | | ILAR-03541 |
| | | | Corten | | ILAR-03542 |

**Options (Not included)**



Anti-Glare Snoot - Grey
ILAR-03734 - 3W
ILAR-03774 - 8W
ILAR-03553 - 15W



Anti-Glare Snoot - Green
ILAR-03735 - 3W
ILAR-03776 - 8W
ILAR-03552 - 15W



Anti-Glare Snoot - Corten
ILAR-03736 - 3W
ILAR-03775 - 8W
ILAR-03551 - 15W



Pole with Spike/Base - Grey
ILAR-03737



Pole with Spike/Base - Green
ILAR-03738




Pole with Spike/Base - Corten
ILAR-03739



Spike
ILAR-00969

## VALL






| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 100-265V | Aluminium | 25° | IP67 | Bracket |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 15W | 3000K | 1200lm | Grey | ILAR-00862 |
| | | | Corten | ILAR-03549 |
| | | | Green RAL 6003 | ILAR-03550 |

**Options (Not included)**



Pole with Spike/Base - Grey
ILAR-03737



Pole with Spike/Base - Green
ILAR-03738



Pole with Spike/Base - Corten
ILAR-03739




Spike
ILAR-00969

## PULSE









| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminium | 70° | IP65 | Surfaced with Spike/Base |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 7W | 2700K | 675lm | Corten | ILAR-02777 |
| | 3000K | 675lm | Black | ILAR-02078 |



## MARI







| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminium | 30° | IP65 | Surface / Recessed Inground |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 6W | 2700K | 490lm | Dark Grey | ILAR-02773 |
| | 2700K | 490lm | Corten | ILAR-02774 |
| 2x 6W | 2700K | 980lm | Dark Grey | ILAR-02775 |
| | 2700K | 980lm | Corten | ILAR-02776 |



## PIRI







| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 24V | Aluminum House + PMMA | 110° | IP65 | Recessed / Inground |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Housing Colour | SKU |
|---|---|---|---|---|---|
| 1W | 3000K | 35lm | 1000x16xØ45mm | Green RAL 6003 | ILAR-03543 |
| | | | 1000x16xØ45mm | Corten | ILAR-03544 |
| | | | 1000x16xØ45mm | Grey | ILAR-03545 |
| | | | 500x16xØ45mm | Green RAL 6003 | ILAR-03546 |
| | | | 500x16xØ45mm | Corten | ILAR-03547 |
| | | | 500x16xØ45mm | Grey | ILAR-03548 |



## SHIRA






| Voltage | Body Material | IP | Mounting Type |
|---|---|---|---|
| 100-240V | Aluminium/Glass | IP65 | Surface |


| Power | Type of Bulb | Housing Colour | SKU |
|---|---|---|---|
| MAX 13W | 1x E27 | Grey | ILAR-00874 |

*Lamps not included.



## ALFA







| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 100-240V | Aluminium | 120° | IP65 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 13W | 3000K | 850lm | Grey RAL 7016 | ILAR-01685 |



## KANE







| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 100-240V | Aluminium | 120° | IP65 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 10W | 2CCT 3000K-4000K | 650lm | Grey RAL 7016 | ILAR-01683 |



## SLOT






| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminium | 230° | IP65 | Surface |


| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 7W | 3000K | 370lm | Black | ILAR-02081 |





## BOLLARD BERY







| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminium | 100° | IP65 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 6W | 3000K | 430lm | Grey | ILAR-02241 |



## SINTRA







| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 100-240V | Aluminium | 120° | IP54 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 10W | 2CCT 3000K-4000K | 650lm | Grey RAL 7016 | ILAR-01681 |



## TERY







| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Die-casting Aluminium<br>Opal Polycarbonate Diffuser | 2x 110° | IP65 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 2x 6W | 3000K | 1020lm | Grey<br>Corten RAL8002 | ILAR-00830<br>ILAR-03595 |



## DOT







| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Polypropylene body + Opal PC | 120° | IP54 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 8W | 4000K | 600lm | Black | ILAR-01100 |



## LIV







| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 85-265V | Aluminium | 120° | IP65 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 8W | 4000K | 655lm | Black RAL 9005 | ILAR-01238<br>ILAR-00993 |



## ARCHI






| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminium | 120° | IP65 | Surface |


| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 12W | 3000K | 600lm | Black | ILAR-02082 |
| | | | Corten | ILAR-02778 |
| | | | Dark Grey | ILAR-02784 |





## JEDAI







| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminium | 360° | IP65 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 30W | 3000K | 2300lm | Grey | ILAR-02147 |



## CALY







| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminium | 360° | IP65 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 12W | 3000K | 650lm | Grey | ILAR-00829 |



## CIMA SLOT







| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Concrete+Stainless Steel+Aluminum | 120° | IP65 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Housing Colour | SKU |
|---|---|---|---|---|---|
| 13W | 3CCT 2700K-<br>3300K-4000K | 750lm-840lm | 400x270x110mm<br>700x270x110mm | Cement Grey<br>Cement Grey | ILAR-03663<br>ILAR-03664 |

## CIMA CALY







| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Concrete+Stainless steel+Aluminum | 90° | IP65 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Housing Colour | SKU |
|---|---|---|---|---|---|
| 8W | 3CCT 2700K-<br>3300K-4000K | 430lm-465lm | Ø160x190mm<br>Ø160x350mm | Cement Grey | ILAR-03667<br>ILAR-03668 |

## CIMA NERO






| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Concrete+Stainless Steel+Aluminum | 60° | IP65 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Housing Colour | SKU |
|---|---|---|---|---|---|
| 9W | 2700K | 540lm | 150x150x456mm<br>150x150x756mm | Cement Grey<br>Cement Grey | ILAR-03665<br>ILAR-03666 |




# UNDERWATER

## LIGHT

### ALL LIGHTING SOLUTIONS

## UNDERWATER UW03






| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 12-24V | Stainless Steel | 15° | IP68 | Bracket |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 9W | RGB+CCT | 600lm | Stainless Steel | ILAR-01724 |

## POOL LIGHT







| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 12-24V | 316 Stainless Steel+PC | 160° | IP68 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 15W (UW01) | RGB+CCT | 1100lm | Stainless Steel | ILAR-01873 |
| 27W (UW02) | | 2000lm | | ILAR-02050 |

## POOL LIGHT






| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 12-24V | 316 Stainless Steel+PC<br>316 Stainless Steel+Glass | 160° | IP68 | Recessed |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 27W (PW01) | RGB+CCT | 2600lm | Stainless Steel | ILAR-02052 |
| 18W (PW02) | | 1800lm | | ILAR-02053 |



# 180—187


# EXTERIOR

## FACADE LIGHTING

**ALL LIGHTING SOLUTIONS**

## GARDEN LIGHT






| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 100-240V | Aluminium | 15° | IP66 | Bracket/Spike |

| Model | Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|---|
| FUTC02 | 9W | RGB-CCT | 900lm | Black | ILAR-01824 |
| FUTC03 | 15W | RGB-CCT | 1500lm | Black | ILAR-01886 |
| FUTC05 | 25W | RGB-CCT | 2100lm | Black | ILAR-01871 |



## LINEAR WALL WASHER







| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 100-240V | Die Cast Aluminium | 120° | IP66 | Bracket/Wall |

| Model | Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|---|
| RL1-24 | 24W | RGB+CCT | 1800lm | Grey | ILAR-01729 |
| RL2-48 | 48W | RGB+CCT | 3200lm | | ILAR-01728 |



## LINEAR WALL WASHER RL5-24

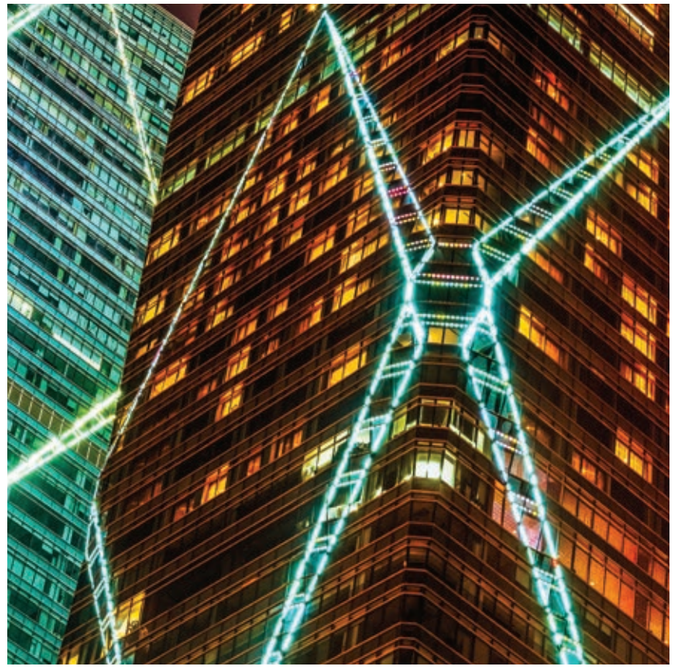






| Voltage | Body Material | IP | Mounting Type |
|---|---|---|---|
| 24-48V | Die Cast Aluminium | IP66 | Bracket/Wall |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 24W | RGB+CCT | 1600lm | Black | ILAR-02139 |

**Options (Not included)**



Connection Cable 1m
ILAR-02350




Connection Cable “T” 1m
ILAR-02351



## ARC MINI







| Voltage | Body Material | Beam Angle | IP | Dimmable | Mounting Type |
|---|---|---|---|---|---|
| 24V | Die Cast Aluminium | Multiple | IP66 | DALI/DMX | Bracket/Wall/Spike |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 6W Configurable | 2200K/3000K/4000K/ 5000K/RGB/RGBW | 600lm max. | Black | On-request |

## ARC COMBI







| Voltage | Body Material | Beam Angle | IP | Dimmable | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | Die Cast Aluminium | Multiple | IP66 | DALI/0-10V/DMX | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 10W-75W Configurable | 2200K/3000K/4000K/ 5000K/RGB/RGBW | 8625lm Max. | Black | On-request |

## ARC PRO



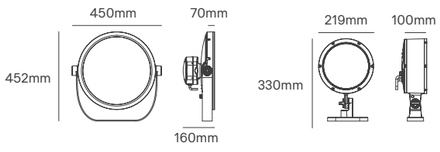



| Voltage | Body Material | Beam Angle | IP | Dimmable | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | Die Cast Aluminium | Multiple | IP66 | DALI/DMX | Bracket/Wall/Spike |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 35W-150W Configurable | 2200K/3000K/4000K/ 5000K/RGB/RGBW | 10500lm max. | Grey | On-request |

## ARC COLOSSUS







| Voltage | Body Material | Beam Angle | IP | Dimmable | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | Die Cast Aluminium | Multiple | IP66 | DALI/DMX | Bracket |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 100W-300W Configurable | 2200K/3000K/4000K/ 5000K/RGB/RGBW | 30000lm max. | Grey | On-request |

## ARC LINE








| Voltage | Body Material | Beam Angle | IP | Dimmable | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | Die Cast Aluminium | Multiple | IP66 | DALI/DMX | Bracked/Ceiling/Suspended |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 18W-36W Configurable | 2200K/3000K/4000K/ 5000K/RGB/RGBW | 3240lm Max. | Black | On-request |
| 65W-130W Configurable | 2200K/3000K/4000K/ 5000K/RGB/RGBW | 11700lm Max. | Black | On-request |

## ARC LINE RECESSED






| Voltage | Body Material | Beam Angle | IP | Dimmable | Mounting Type |
|---|---|---|---|---|---|
| 220-240V 24V | Die Cast Aluminium | Multiple | IP67 | DALI/DMX | Recessed |


| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Housing Colour | SKU |
|---|---|---|---|---|---|
| 10W-20W Configurable | 2200K/3000K/4000K/ 5000K/RGB/RGBW | 2000lm Max. | 325x132x102mm | Silver | On-request |
| 20W-40W Configurable | | 4000lm Max. | 560x132x102mm | | |
| 40W-80W Configurable | | 8000lm Max. | 1060x132x102mm | | |

## PILENE



| Voltage | Body Material | Beam Angle | IP | Dimmable | Mounting Type |
|---|---|---|---|---|---|
| 48V | Die Cast Aluminium | 120° | IP66 | DMX | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 3W-12W Configurable | 2200K/2700K/3000K/ 4000K/ 5000K/ RGB/RGBW | 1200lm max. | Silver | On-request |

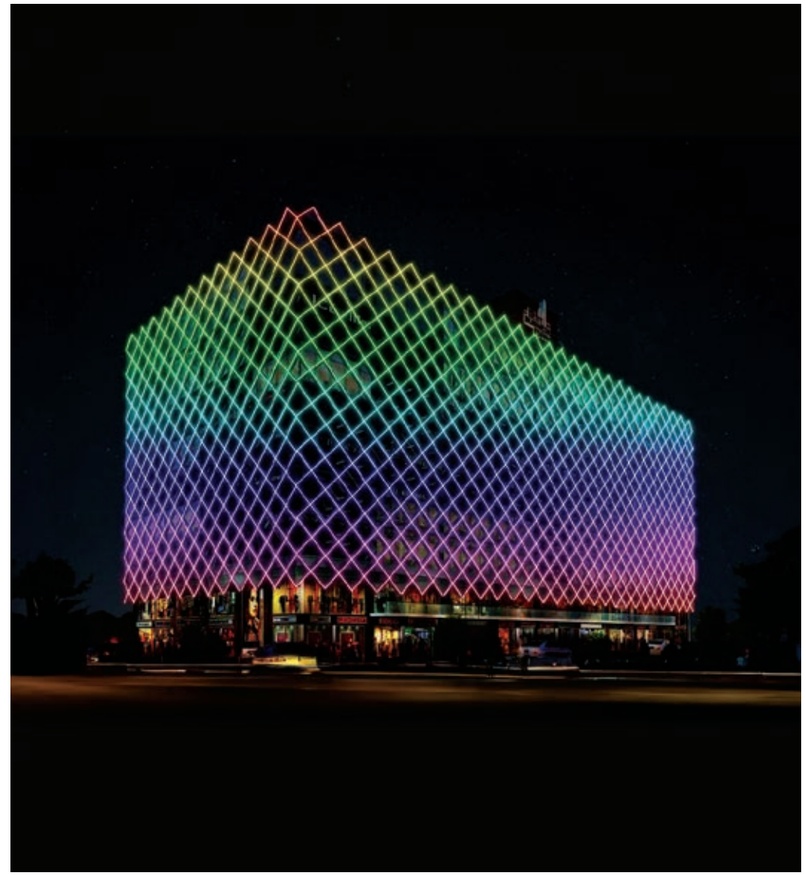

188—191





# WORKLIGHT

CONSTRUCTION LIGHTING

ALL LIGHTING SOLUTIONS

## POCKET PROJECTOR







| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 24V | Polycarbonate | 120° | IP54 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Working Time | Housing Colour | SKU |
|---|---|---|---|---|---|
| 10W | 6500K | 800lm | 1.5h - 100% (800lm)<br>3H - 50% (400lm)<br>8H - 10% (80lm Top Light) | Green/Black | ILAR-02856 |

## WORKLIGHT BOLD






| Voltage | Body Material | Beam Angle | IP | Socket | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | Aluminium/PC | 120° | IP54 | 230V~16A / 5m Cable | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 100W | 6000K | 9000lm | Green/Black | ILAR-02857 |

## WORK LED STRIP







| Voltage | Beam Angle | IP | Mounting Type |
|---|---|---|---|
| 220-240V | 120° | IP65 | Roll / Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Cut | SKU |
|---|---|---|---|---|---|
| 20W | 4000K | 2000lm/m | 25000x10.5mm | 100mm | ILAR-03746 |
| 12W | 5000K | 1200lm/m | 50000x10.5mm | 100mm | ILAR-03554 |




## STRING PROJECTOR






| Voltage | Body Material | IP | Mounting Type |
|---|---|---|---|
| 220-240V | Aluminium/ABS/PC | IP54 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Battery | Working Time | Housing Colour | SKU |
|---|---|---|---|---|---|---|
| 50W | 6500K | 4500lm | Li-Ion Battery 18650<br>3.7V 12000mAh<br>Replaceable | 2h - 100% (4500lm)<br>4H - 50% (2500lm)<br>10H - 20% (1000lm) | Green/Black | ILAR-02148 |

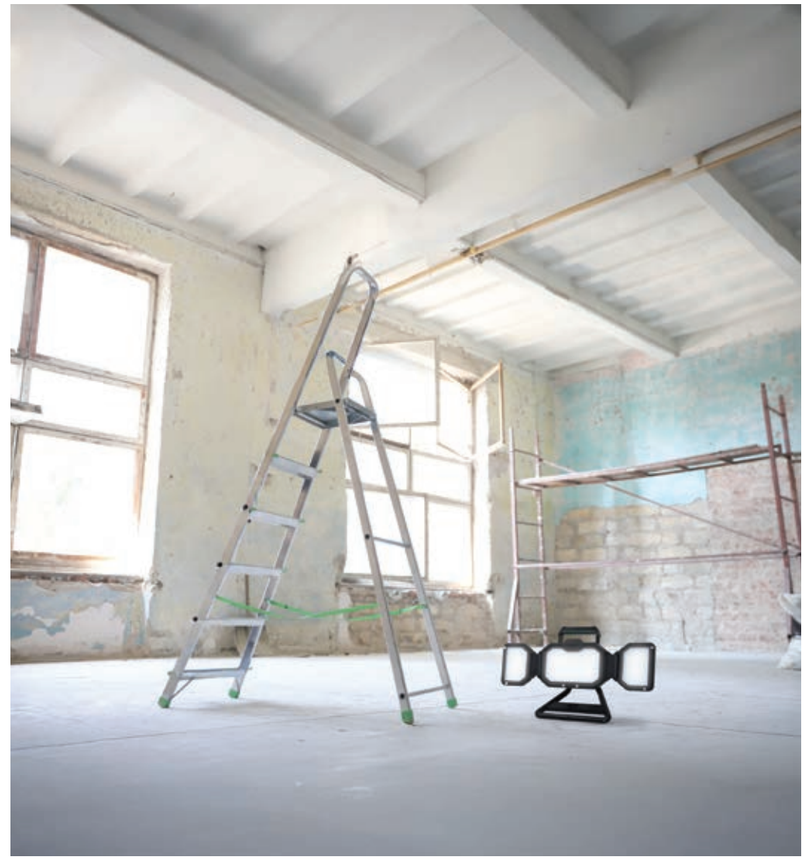



# 192—209

# SOLAR

## GARDEN


ALL LIGHTING SOLUTIONS

## BLOK



| Solar Panel | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| Monocrystalline Silicon 4.86 1.5W | ABS+PC | 120° | IP65 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 6W | 4000K | 1000lm | Grey | ILAR-02289 |







## KOY

| Solar Panel | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| Monocrystalline Silicon 4.86V 2W | ABS+PC | 120° | IP65 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 6W | 4000K | 1000lm | Grey | ILAR-02290 |









## ZUN



| Solar Panel | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| Monocrystalline Silicon 4.86 1W | ABS+PC | 120° | IP65 | Surface |


| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 6W | 4000K | 1000lm | Grey | ILAR-02291 |






## MARLO






| Solar Panel | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| Monocrystalline Silicon 4.86V 1.5W | ABS+PC | 120° | IP65 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 6W | 4000K | 1000lm | Grey | ILAR-02292 |




## NATAN



### SINGLE






### QUADRUPLO






| Solar Panel | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| Monocrystalline Silicon 4.32 9W | Aluminium | 270°x90° | IP65 | Surface |


| Model | Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|---|
| Single | 6W | 3CCT 2700K~6500K | 880lm | Black | ILAR-02298 |
| | | RGB | 880lm | Black | ILAR-02299 |
| Quadrupulo | 1.5W | 3CCT 2700K~6500K | 220lm | Black | ILAR-02300 |
| | | RGB | 220lm | Black | ILAR-02301 |

## BIRK











| Solar Panel | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 2.8W, DC5.5V<br>Mono with tempered glass | ABS+PC, Anti-UV,<br>V0 material for fire-proof | 120° | IP65 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 6W | 4000K | 800lm | Black<br>White | ILAR-01235<br>ILAR-01236 |



## FLOOD SOLAR PRO II






| Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|
| Aluminium | 120° | IP65 | Bracket Mounting |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 15W | 3CCT 3000K- | 1900lm | Black | ILAR-03002 |
| 32W | 4000K-6500K | 4800lm | | ILAR-03003 |



## FLOX





| Solar Panel | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 0.8W Monocrystal Silicon Solar Panel | ABS+PC | 90° | IP65 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 1.5W | 6000K | 200lm | White | ILAR-00783 |
| 6.8W | 6000K | 800lm | White | ILAR-00784 |

## LEO



| Solar Panel | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| Polycrystalline 5V 3.5W | ABS+PC | 25° | IP65 | Recessed |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 5W | 6000K | 200lm | Black | ILAR-02691 |

## SABI




| Solar Panel | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 1W / 5.5V | ABS+PC | 120° | IP65 | Recessed |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 1.5W | RGB+CW+WW | 120lm | Black | ILAR-01931 |



## LOTUS







| Solar Panel | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 9V/3.5W Monocrystalline | 6063 Aluminium PC | 120° | IP65 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 3.5W | 5000K | 255lm | Black | ILAR-00433 |



## BOLLARD






| Solar Panel | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| Monocrystalline Silicon 4.86 1W | Aluminum Panlite PC | 120° | IP65 | Surface |


| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 2W | 3000K | 100lm | Grey | ILAR-02293 |



## MOSS









| Solar Panel | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 5V/6.5W Monocrystalline | 6033 Aluminium PC | 360° | IP65 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 3.5W | 5000K | 300lm | Black | ILAR-00430 |

## PLUTO







| Solar Panel | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| Monocrystalline Silicon | Aluminium | Assymetrical | IP66 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 2.5W | 3000K | 130lm | Grey | ILAR-03596 |
| | | | Corten | ILAR-03594 |



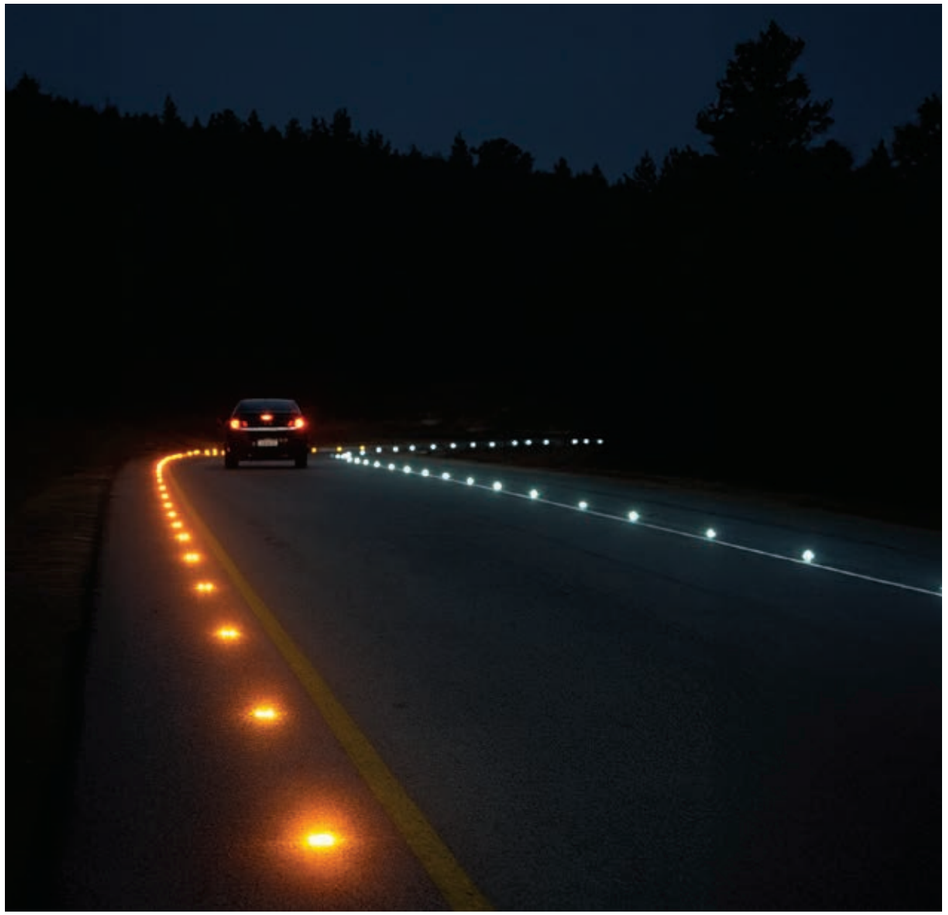

| Solar Panel | Body Material | Visual Distance | IP | Mounting Type |
|---|---|---|---|---|
| Mono crystalline 2.5V/0.25W | Aluminium alloy | >800m | IP68 | Surface/Recessed |



| White | Green | Red | Yellow | Blue | Square Blue | Square Yellow | Recessed Yellow |
|---|---|---|---|---|---|---|---|
| ILAR-02370 | ILAR-02371 | ILAR-02372 | ILAR-02373 | ILAR-02374 | ILAR-02375 | ILAR-02378 | ILAR-02381 |



# PLAFON

## LIGHTING

## LIA / CALISTO / MIRANDA

**LIA**






54mm

Ø220-Ø280mm

**CALISTO**





68-90mm

Ø320-Ø450mm

**MIRANDA**





72mm

Ø460mm

| Voltage | Body Material | Beam Angle | Mounting Type |
|---|---|---|---|
| 220-240V | SPCC+PC | 120° | Surface |

| Model | Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | IP | Housing Colour | SKU |
|---|---|---|---|---|---|---|
| LIA | 18W | 3CCT 3000K-4000K-6000K | 1530lm | IP54 | White | ILAR-03662 |
| LIA | 24W | 4000K | 2040lm | IP54 | White | ILAR-00877 |
| LIA | 24W | 3CCT 3000K-4000K-6000K | 2040lm | IP54 | White | ILAR-03661 |
| CALISTO | 18W | 2CCT 3000K-4000K | 2100lm | IP44 | White | ILAR-03672 |
| CALISTO | 30W | 2CCT 3000K-4000K | 3600lm | IP44 | White | ILAR-02130 |
| MIRANDA | 40W | 3CCT 3000K-4000K-6500K | 4000lm | IP44 | White | ILAR-02449 |





## LEVI / GLENDA



**LEVI**





54mm

280x280mm

**GLENDA**





65mm


375x375mm

| Voltage | Body Material | Beam Angle | Mounting Type |
|---|---|---|---|
| 220-240V | SPCC+PC | 120° | Surface |

| Model | Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | IP | Housing Colour | SKU |
|---|---|---|---|---|---|---|
| LEVI | 24W | 3CCT 3000K-4000K-6000K | 2040lm | IP54 | White | ILAR-03628 |
| GLENDA | 32W | 3CCT 3000K-4000K-6500K | 3200lm | IP44 | White | ILAR-02450 |

## DÁLIA






| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 100-240V | ABS + PC | 120° | IP65 | Surface |

| Power | Type of Bulb | Size | Housing Colour | SKU |
|---|---|---|---|---|
| MAX 35W | 2x E27 | Ø300x85mm | White | ILAR-00348 |

*Lamps not included.

## MOON


MOON






MARS







HALF MOON






HALF MARS







| Voltage | Body Material | Beam Angle | IP | IK | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | ABS + PC | 120° | IP66 | IK10 | Surface |

| Model | Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|---|
| Moon | 15W | 3CCT 3000K-4000K-5700K | 1700lm | White | ILAR-01916 |
| Mars | 15W | | 1700lm | White | ILAR-01918 |
| Half Moon | 15W | | 900lm | Black | ILAR-01917 |
| Half Mars | 15W | | 900lm | Black | ILAR-01919 |

## LARA






| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | ABS + PC | 120° | IP54 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 12W | 4000K | 840lm | ABS + PC | ILAR-00954 |




## RUMU










| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | ABS + PC | 120° | IP65 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| Switch 9W/12W/16W | 4CCT 3000K-4000K-5000K-6000K | 2240lm | White | ILAR-02971 |

**Options (Not included)**



Round - Grey
ILAR-02975



Round - Black
ILAR-02976



Half-shade - White
ILAR-02977



Half-shade - Grey
ILAR-02978



Half-shade - Black
ILAR-02980



Dimming Microwave Sensor
ILAR-02972



Emergency Kit
ILAR-02973






# INTERIOR

## BATTENS


**ALL LIGHTING SOLUTIONS**

## SEAM



| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 170-265V | ABS+PC | 120° | IP40 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Housing Colour | SKU |
|---|---|---|---|---|---|
| 24W | 3CCT 3000K- | 2880lm | 700x168x54mm | White | ILAR-02131 |
| 50W | 4000K-6500K | 6000lm | 1200x168x54mm | | ILAR-02132 |







## MEGASLIM



| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 200-240V | Aluminium/PVC | 120° | IP20 | Surface Mounted |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Housing Colour | SKU |
|---|---|---|---|---|---|
| 20W | 6000K | 1600lm | 600x80x24mm | White RAL 9016 | ILAR-00237 |
| 40W | 4500K | 3200lm | 1200x80x24mm | | ILAR-00239 |
| 40W | 6000K | 3200lm | 1200x80x24mm | | ILAR-00240 |









## CABINET T5 ROTABLE






| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminium/PVC | 120° | IP20 | Surface Mounted |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Housing Colour | SKU |
|---|---|---|---|---|---|
| 8W | 3CCT 3000K- | 800lm | 545x24x61mm | White | ILAR-03568 |
| 16W | 4000K-6500K | 1600lm | 1134x24x61mm | | ILAR-03569 |



## T5 PRO



| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 100-240V | PVC | 300° | IP20 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Housing Colour | SKU |
|---|---|---|---|---|---|
| 4W | 3000K | 440lm | 300x35mm | White RAL 9016 | ILAR-00182 |
| 4W | 4000K | 440lm | | | ILAR-00786 |
| 4W | 2CCT 3000K-4000K | 440lm | | | ILAR-03773 |
| 8W | 3000K | 880lm | 600x35mm | | ILAR-00788 |
| 8W | 4000K | 880lm | | | ILAR-00789 |
| 8W | 2CCT 3000K-4000K | 880lm | | | ILAR-03730 |
| 18W | 3000K | 1980lm | 1183x35mm | | ILAR-00791 |
| 18W | 4000K | 1980lm | | | ILAR-00792 |
| 18W | 2CCT 3000K-4000K | 1980lm | | | ILAR-03729 |
| 22W | 4000K | 2420lm | 1433x35mm | | ILAR-00889 |







## KAYA



| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 100-240V | PC+Aluminium Inside | 120° | IP20 | Surface Mounted |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Housing Colour | SKU |
|---|---|---|---|---|---|
| 15W | 4000K | 1800lm | 600x71.5x32mm | White RAL 9016 | ILAR-00773 |
| 30W | | 3600lm | 1200x71.5x32mm | | ILAR-00774 |
| 40W | | 4800lm | 1500x71.5x32mm | | ILAR-00775 |












## BOX T8







| Voltage | Model | Body Material | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Double (T8) | ABS+PC | IP20 | Surface |

| Model | Size | Housing Colour | SKU |
|---|---|---|---|
| 60CM | 640x165x55mm | White | ILAR-01914 |
| 120CM | 1240x165x55mm | | ILAR-01915 |
| 150CM | 1540x165x55mm | | ILAR-02532 |

## ARMADURA T8







| Voltage | Body Material | Type of Bulb | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Polycarbonate + SS clips | Tube T8 | IP65 | Surface |

| Size | Model | Size | Housing Colour | SKU |
|---|---|---|---|---|
| 600mm | Single | 650x75x86mm | Grey | ILAR-00260 |
| | Double | 650x120x86mm | | ILAR-00261 |
| 1200mm | Single | 1260x75x86mm | | ILAR-00262 |
| | Double | 1260x120x86mm | | ILAR-00263 |
| 1500mm | Single | 1560x75x86mm | | ILAR-00264 |
| | Double | 1560x120x86mm | | ILAR-00265 |

*T8 tubes not included

## RÉGUAS T8






| Voltage | Body Material | Type of Bulb | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminium/PVC | Tube T8 | IP20 | Surface |

| Max Power | Model | Model Size | Housing Colour | SKU |
|---|---|---|---|---|
| 1x 30W | Single | 600mm | White | ILAR-00270 |
| 2x 30W | Double | | | ILAR-00271 |
| 1x 30W | Single | 1200mm | | ILAR-00272 |
| 2x 30W | Double | | | ILAR-00273 |
| 1x 30W | Single | 1500mm | | ILAR-00274 |
| 2x 30W | Double | | | ILAR-00275 |

## SMD





600-1200-1500mm



55mm

100mm

| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Polycarbonate | 120° | IP65 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Housing Colour | SKU |
|---|---|---|---|---|---|
| 24W | 5000K | 2880lm | 600x100x70mm | Grey | ILAR-01104 |
| 48W | | 5760lm | 1200x100x70mm | | ILAR-01105 |
| 56W | | 6720lm | 1500x100x70mm | | ILAR-01106 |



## NEXOR



| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 200-240V | PC+Aluminium Inside | 140° | IP65 | Ceiling Mounting |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | Size | SKU |
|---|---|---|---|---|---|
| 18W | 4000K | 2160lm | Grey | 600x64x60mm | ILAR-03004 |
| | 6500K | 2160lm | | 1200x64x60mm | ILAR-03005 |
| 36W | 4000K | 4320lm | | 1500x64x60mm | ILAR-03006 |
| | 6500K | 4320lm | | 1200x64x60mm | ILAR-03007 |
| 48W | 4000K | 5760lm | | 1500x64x60mm | ILAR-03008 |
| | 6500K | 5760lm | | 1500x64x60mm | ILAR-03009 |




600-1200-1500mm



60mm

64mm

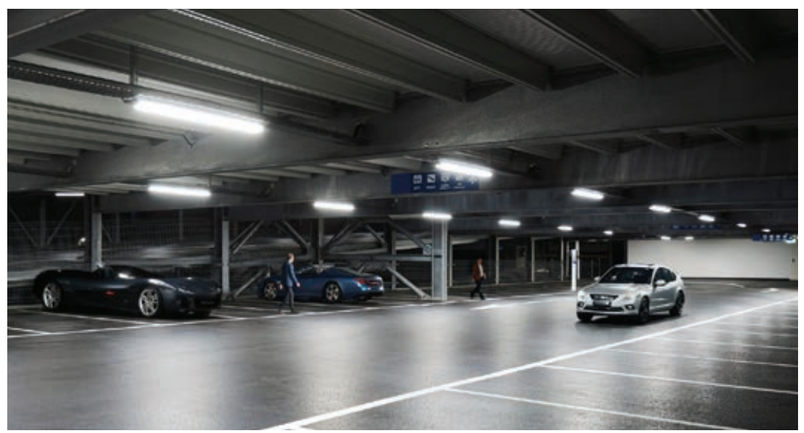



## TITAN





600-1200-1500mm



68mm

79mm

| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | ABS+PC | 120° | IP65 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Housing Colour | SKU |
|---|---|---|---|---|---|
| 18W | 3CCT 3000K-4000K-6500K | 2700lm | 600x79x68mm | Grey | ILAR-02133 |
| 36W - ER | | 5400lm | 1200x79x68mm | | ILAR-02135 |
| 48W - ER | | 7200lm | 1500x79x68mm | | ILAR-02137 |

**Options (Not included)**



2W Emergency KIT
180min
ILAR-02138



Dimming Sensor
ILAR-02915



Driver Xitanium 60W
300V TD16 DALI
ILDV-00458



Driver Xitanium 35W
220V TD16 DALI
ILDV-00459




## INTEL TRI-PROOF








| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | PC+Aluminium inside | 120° | IP66 | Surface Mounted |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Housing Colour | SKU |
|---|---|---|---|---|---|
| 15W | 4000K | 2250lm | 600x66.5x70.5mm | White | ILAR-02437 |
| 15W | 3CCT 3000K-4000K-5000K | 2250lm | 600x66.5x70.5mm | | ILAR-03658 |
| 30W | 4000K | 4500lm | 1200x66.5x70.5mm | | ILAR-02439 |
| 30W | 3CCT 3000K-4000K-5000K | 4500lm | 1200x66.5x70.5mm | | ILAR-03657 |
| 43W | 4000K | 6450lm | 1500x66.5x70.5mm | | ILAR-02441 |
| 50W | 4000K | 8500lm | 1500x66.5x70.5mm | | ILAR-02443 |
| 15W | 5000K | 2250lm | 600x66.5x70.5mm | | ILAR-01146 |
| 30W | 5000K | 4500lm | 1200x66.5x70.5mm | | ILAR-00957 |
| 43W | 5000K | 6450lm | 1500x66.5x70.5mm | | ILAR-00958 |
| 50W | 5000K | 8500lm | 1500x66.5x70.5mm | | ILAR-01590 |

**Options (Not included)**



Microwave Sensor
White
ILAR-02445



PIR Sensor
White
ILAR-02446




Emergency Kit
White
ILAR-02447



## DURA TERMAX - HIGH TEMPERATURE






| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 200-240V | Stainless Steel+Borosilicate Glass | 140° | IP69K | Suspended/Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 15W | 4000K | 1950lm | White | ILAR-03292 |
| 35W | | 4550lm | | ILAR-03293 |



## DURA PRO - HACCP






| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Stainless Steel+Borosilicate Glass | 120° | IP69K | Suspended/Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 20W | 4000K | 3200lm | White | ILAR-02564 |
| 36W | | 5760lm | | ILAR-02149 |
| 48W | | 7680lm | | ILAR-02565 |

220—229




# FLOODLIGHT

PROJECTORS

ALL LIGHTING SOLUTIONS

## SPECTRA 3CCT







| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| **22**0-240V | Die Cast Aluminium | 120° | IP65 | Bracket Mounting |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Housing Colour | SKU |
|---|---|---|---|---|---|
| 30W | 3CCT 3000K- | 3000lm | 114x154x25mm | Black RAL 9005 | ILAR-02888 |
| 50W | 4000K-6000K | 5000lm | 165x221x27mm | | ILAR-02889 |
| 100W | | 10000lm | 221x279x28mm | | ILAR-02890 |
| 150W | | 15000lm | 294x380x37mm | | ILAR-02891 |
| 200W | | 20000lm | 314x406x38mm | | ILAR-02892 |
| 30W | 3CCT 3000K- | 3000lm | 114x154x25mm | White RAL 9016 | ILAR-02922 |
| 50W | 4000K-6000K | 5000lm | 165x221x27mm | | ILAR-02923 |

## SPECTRA SENSOR








| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| **22**0-240V | Die Cast Aluminium | 120° | IP65 | Bracket Mounting |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Housing Colour | SKU |
|---|---|---|---|---|---|
| 20W | 4000K | 1600lm | 69.8x93.8mm | Black RAL 9005 | ILAR-02899 |
| 20W | 6000K | 1600lm | | | ILAR-02902 |
| 30W | 4000K | 2400lm | 97.8x131.8mm | | ILAR-02900 |
| 30W | 6000K | 2400lm | | | ILAR-02903 |
| 50W | 4000K | 4000lm | 115.8x145.8mm | | ILAR-02901 |
| 50W | 6000K | 4000lm | | | ILAR-02904 |
| 20W | 4000K | 1600lm | 69.8x93.8mm | White RAL 9016 | ILAR-02893 |
| 20W | 6000K | 1600lm | | | ILAR-02896 |
| 30W | 4000K | 2400lm | 97.8x131.8mm | | ILAR-02894 |
| 30W | 6000K | 2400lm | | | ILAR-02897 |
| 50W | 4000K | 4000lm | 115.8x145.8mm | | ILAR-02895 |
| 50W | 6000K | 4000lm | | | ILAR-02898 |



## 3CCT



AVAILABLE IN BLACK/WHITE

DIE CAST ALUMINIUM

3CCT 3000K-4000K-6000K

ANTI-CONDENSATION VALVE



## WITH SENSOR



CAP

SENSOR



ANTI-CONDENSATION VALVE

30.000 HOURS

50CM CABLE


SMD 2835

IP65

## PROJECTOR SLIM









| Voltage | Body Material | Bean Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Die Cast Aluminium | 120° | IP65 | Bracket Mounting |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 10W | 3000K | 800lm | Black | ILAR-00094 |
| 10W | 4000K | 850lm | | ILAR-01947 |
| 10W | 6000K | 900lm | | ILAR-00126 |
| 20W | 3000K | 1700lm | | ILAR-00392 |
| 20W | 4000K | 1750lm | | ILAR-01948 |
| 20W | 6000K | 1800lm | | ILAR-00127 |
| 30W | 3000K | 2600lm | | ILAR-00393 |
| 30W | 4000K | 2650lm | | ILAR-01949 |
| 30W | 6000K | 2700lm | | ILAR-00128 |
| 50W | 3000K | 4000lm | | ILAR-00394 |
| 50W | 4000K | 4250lm | | ILAR-01950 |
| 50W | 6000K | 4500lm | | ILAR-00129 |
| 10W | 4000K | 900lm | White | ILAR-00175 |
| 10W | 6000K | 900lm | | ILAR-00174 |
| 20W | 4000K | 1700lm | | ILAR-00532 |
| 20W | 6000K | 1700lm | | ILAR-00176 |
| 30W | 4000K | 2500lm | | ILAR-00535 |
| 30W | 6000K | 2700lm | | ILAR-00177 |
| 50W | 4000K | 4000lm | | ILAR-00538 |
| 50W | 6000K | 4500lm | | ILAR-00178 |

## POLYCARBONATE






| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | ABS + PC | 120° | IP65 | Bracket Mounting |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 10W | 6000K | 900lm | Black | ILAR-00935 |
| 20W | | 1800lm | | ILAR-00936 |
| 30W | | 2700lm | | ILAR-00937 |
| 50W | | 4500lm | | ILAR-00938 |




## BLAZE



| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 120-277V | Die Cast Aluminium | 120° | IP66 | Bracket Mounting |

| Power Switch | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Housing Colour | SKU |
|---|---|---|---|---|---|
| 50W-80W-100W | 3CCT 3000K- | 16000lm (Max.) | 270x290x58mm | Grey | ILAR-02219 |
| 120W-150W-200W | 4000K-5000K | 32000lm (Max.) | 320x328x64mm | | ILAR-02220 |
| 200W-240W-300W | | 48000lm (Max.) | 370mmx392x78mm | | ILAR-02221 |







## MASTER PRO




| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Die Cast Aluminium | Assymetrical | IP66 | Bracket Mounting |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Housing Colour | SKU |
|---|---|---|---|---|---|
| 50W | 4000K | 7500lm | 268x228x52mm | Black | ILAR-02084 |
| 50W | 5000K | 7500lm | | | ILAR-01218 |
| 100W | 3000K | 15000lm | 315x270x60mm | | ILAR-02085 |
| 100W | 5000K | 15000lm | | | ILAR-01219 |
| 150W | 5000K | 22500lm | 360x302x68mm | | ILAR-00983 |
| 200W | 5000K | 30000lm | 399x343x71mm | | ILAR-00984 |
| 300W | 5000K | 45000lm | 470x406x80mm | | ILAR-00985 |







## ASTRO EVO

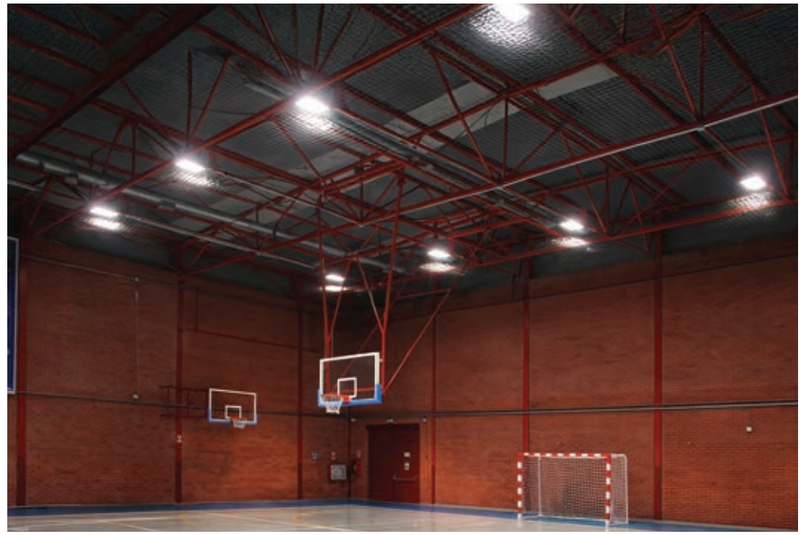







| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Die Cast Aluminium | OP01 - Asy | IP66 | Bracket Mounting |

| Power Switch | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 75W-110W-150W | 2CCT 4000K-5000K | 24000 lm | Black RAL 9017 | ILAR-03707 |
| 100W-150W-200W | 2CCT 4000K-5000K | 32000 lm | Black RAL 9017 | ILAR-03708 |

## PADELITE ECO







| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Die Cast Aluminium | OP01-Asy | IP66 | Bracket |


| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 300W | 4000K | 48000lm | Black | ILAR-03752 |



## PADELITE PRO

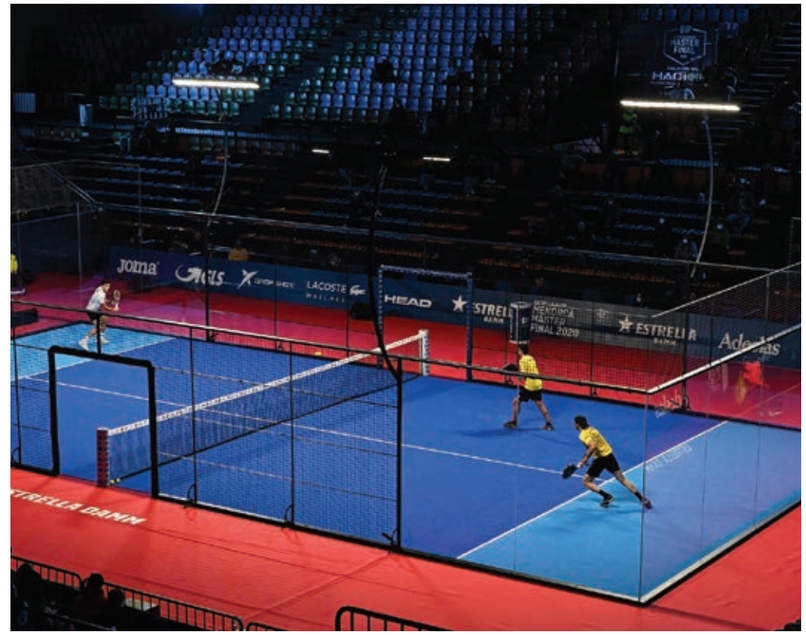




| Voltage | Body Material | Beam Angle | IP | Dimmable | Mounting Type |
|---|---|---|---|---|---|
| 100-240V | Die Cast Aluminium | OP01-Asy | IP66 | 0-10V | Bracket/Pole Mounting |

| Power Switch | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 240W-320W | 4000K | 51200lm Max. | Black | ILAR-03751 |

**On-request**

| | |
|---|---|
| 240W to 320W | 3000K or 4000K or 5000K or 5700K or RGBW |

**Options (Not included)**




Pole Mounting Adapter
On-request

## TECH PRO



**Size**

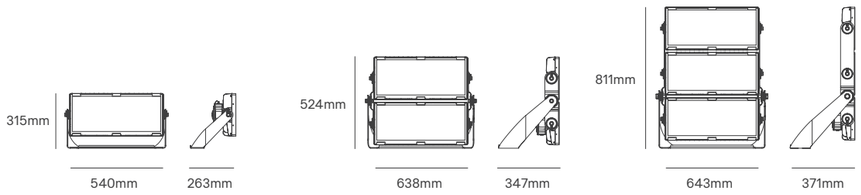


| Voltage | Body Material | Dimmable | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Die Cast Aluminium | NO | IP66 | Bracket Mounting |

| Power Switch | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Beam Angle | Housing Colour | SKU |
|---|---|---|---|---|---|
| 400W-500W-600W | 5000K | 96000lm Max. | OP01-Asy | Grey | ILAR-03766 |
| 400W-500W-600W | 5000K | | Switch 20°-30°-40° | Grey | ILAR-03767 |
| 800W-1000W-1200W | 5000K | 192000lm Max. | OP01-Asy | Grey | ILAR-03768 |
| 800W-1000W-1200W | 5000K | | Switch 20°-30°-40° | Grey | ILAR-03769 |
| 1500W-1600W-1800W | 5000K | 288000lm Max. | OP01-Asy | Grey | ILAR-03770 |
| 1500W-1600W-1800W | 5000K | | Switch 20°-30°-40° | Grey | ILAR-03771 |

## ULTRAMAX




| Voltage | Body Material | Dimmable | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Die Cast Aluminium | 0-10V or DALI or DMX | IP66 | Bracket Mounting |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Beam Angle | Housing Colour | SKU |
|---|---|---|---|---|---|
| 400W-600W | 4000K or 5000K or 5700K | 105000 Max. | Multiple | Grey RAL 9006 | On-request |
| 900W-1200W | 4000K or 5000K or 5700K | 210000 Max. | Multiple | Grey RAL 9006 | On-request |
| 1500W-1800W | 4000K or 5000K or 5700K | 315000 Max. | Multiple | Grey RAL 9006 | On-request |




## TECH DIMMABLE




| Voltage | Body Material | Dimmable | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Die Cast Aluminium | 0-10V | IP66 | Bracket Mounting |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Beam Angle | Size | Housing Colour | SKU |
|---|---|---|---|---|---|---|
| 400W | 5000K | 52000lm | Asy | 419x340x222mm | Grey | ILAR-00986 |
| 600W | | 78000lm | Asy | 529x340x226mm | | ILAR-00987 |
| 600W | | | 30° | | | ILAR-01172 |
| 600W | | | 60° | | | ILAR-01185 |

## TECH II DIMÁVEL

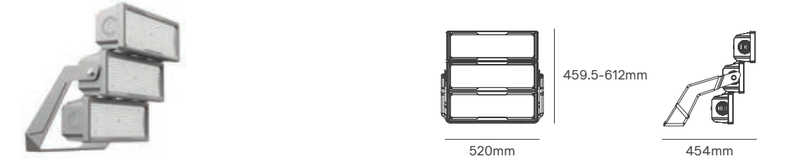


| Voltage | Body Material | Dimmable | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminium | 0-10V | IP66 | Bracket Mounting |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Beam Angle | Housing Colour | SKU |
|---|---|---|---|---|---|
| 250W | 5000K | 33750-40000lm | 15° | Grey | ILAR-03053 |
| | | | 30° | | ILAR-02981 |
| | | | 45° | | ILAR-03054 |
| | | | 60° | | ILAR-03055 |
| | | | Asy | | ILAR-03056 |
| 500W | 5000K | 67500-80000lm | 15° | | ILAR-03057 |
| | | | 30° | | ILAR-02982 |
| | | | 45° | | ILAR-03058 |
| | | | 60° | | ILAR-03059 |
| | | | Asy | | ILAR-03060 |
| 750W | 5000K | 101250-120000lm | 15° | | ILAR-02007 |
| | | | 30° | | ILAR-02005 |
| | | | 45° | | ILAR-03061 |
| | | | 60° | | ILAR-02006 |
| | | | Asy | | ILAR-02008 |
| 1000W | 5000K | 135000-160000lm | 15° | | ILAR-02003 |
| | | | 30° | | ILAR-01959 |
| | | | 45° | | ILAR-03062 |
| | | | 60° | | ILAR-02002 |
| | | | Asy | | ILAR-02004 |

230–237


# INDUSTRIAL

LIGHTING

## ALL LIGHTING SOLUTIONS

## MASTER DIMMABLE






| Voltage | Body Material | Beam Angle | IP | Dimmable | Mounting Type |
|---|---|---|---|---|---|
| 100-277VAC | Die-Casting Aluminum | 90° | IP65 | 1-10V | Ceiling Mounting |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 100W | 5000K | 15000lm | Black RAL 9004 | ILAR-01233 |
| 150W | | 22500lm | | ILAR-01191 |
| 200W | | 30000lm | | ILAR-01192 |
| 240W | | 36000lm | | ILAR-01246 |

**Options (Not included)**



Ceiling Mounting
ILAR-01030




Reflector 100W/150W
ILAR-01391



Reflector 200W/240W
ILAR-01392

## MASTER II 3CCT






| Voltage | Body Material | Beam Angle | IP | Dimmable | Sensor | Mounting Type |
|---|---|---|---|---|---|---|
| 100-277VAC | Die-Casting Aluminum | 90° | IP65 | 0-10V | Optional | Ceiling Mounting |

| Power Switch | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Housing Colour | SKU |
|---|---|---|---|---|---|
| 80W-120W-150W | 3CCT 3000K- | 12800-24000lm | Ø280x130mm | Black RAL 9004 | ILAR-01960 |
| 120W-150W-200W | 4000K-5000K | 19200-32000lm | Ø280x130mm | Black RAL 9004 | ILAR-02270 |

**Options (Not included)**



Motion and Lighting Sensor
ILAR-02628



Remote
ILAR-02629




Reflector 90° to 150W
ILAR-02158





## TECH EVO






**Power / CCT / Beam Angle Switch**




| Voltage | Body Material | Beam Angle | IP | Dimmable | Mounting Type |
|---|---|---|---|---|---|
| 100-277VAC | Die-Casting Aluminum | Switch 75°-85°-115° | IP65 | 0-10V | Ceiling Mounting |

| Power Switch | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 100W-120W-150W | 3CCT 3000K-4000K-5000K | 27750lm Max. | Black RAL 9017 | ILAR-03747 |
| 120W-150W-200W | 3CCT 3000K-4000K-5000K | 37000lm Max. | Black RAL 9017 | ILAR-03748 |



## COBALT






| Voltage | Body Material | Beam Angle | IP | Dimmable | Sensor | Mounting Type |
|---|---|---|---|---|---|---|
| 220-240V | Aluminum Alloy | 90° | IP65 | 0-10V | Zhaga (Optional) | Loop Hanging/Ceiling Mounting |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 150W | 3CCT 3000K-4000K-5000K | 27000lm | Ral 9007 Grey | ILAR-02205 |

## TECH







| Voltage | Body Material | Beam Angle | Dimming | IP | Mounting Type |
|---|---|---|---|---|---|
| 220-277VAC | Aluminum Alloy | 90° | (0-10V) | IP65 | Ceiling Mounting |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | Size | SKU |
|---|---|---|---|---|---|
| 150W | 5000K | 24000lm | Black | Ø298x167mm | ILAR-01044 |
| 200W | | 32000lm | | Ø364x166mm | ILAR-01045 |

## DOB ECO







| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminum Alloy | 120° | IP65 | Suspended |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 150W | 5000K | 18000lm | Black | ILAR-01046 |
| 200W | | 24000lm | | ILAR-01644 |



## FORGE HIGH TEMPERATURE (70°C)







| Voltage | Body Material | Beam Angle | IP | Dimmable | Mounting Type |
|---|---|---|---|---|---|
| 120-277V | Aluminum Alloy | 120° | IP66 | 0-10V | Ceiling Mounting |

| Power Switch | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | Size | SKU |
|---|---|---|---|---|---|
| 100W-120W-140W-160W-180W-200W | 4000K | 37000lm | Black | Ø400x184mm | ILAR-03624 |

## SIRIUS







| Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|
| Aluminium | 110° | IP65 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 40W | 4000K | 5400lm | Black | ILAR-00709 |
| | 5000K | 5400lm | | ILAR-00514 |
| 80W | 4000K | 10800lm | Black | ILAR-00851 |
| | 5000K | 10800lm | | ILAR-00515 |
| | 3CCT 3000K-4000K-5000K | 10800lm | | ILAR-01935 |



## LINEAR LUMIA






| Voltage | Body Material | Beam Angle | Dimming | IP | Mounting Type |
|---|---|---|---|---|---|
| 100-277VAC | Aluminum Alloy | 60°x110° | (0-10V) | IP66 | Suspended/Bracket |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | Size | SKU |
|---|---|---|---|---|---|
| 150W | 5000K | 24000lm | White | 892x105x79mm | ILAR-02152 |
| 200W | | 32000lm | | 1192x105x79mm | ILAR-02153 |

**Options (Not included)**



Suspension Kit 1.1m
ILAR-02154



Adjustable Wall Bracket
ILAR-02155



Lens 90x110°
ILAR-02156




Lens Double Side 25°
ILAR-02157


## ACCESSORIES

| | | Housing Colour | Body Material | SKU |
|---|---|---|---|---|
|  | Emergency Kit for High Bay | White | Aluminium | ILEM-00032 |
|  | Remote Controller for High Bay Emergency Kit | Grey | Aluminium | ILEM-00046 |
|  | Ceiling Mounting | | | On-request |
|  | Conversor 1-10V para DALI IP65 | | | ILAR-01379 |



## GAS STATION PRO






| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 120-277V | Aluminium | 90° | IP66 | Recessed |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 100W | 5000K | 15000lm | White | ILAR-03647 |

**Options (Not included)**



Recessed Springs
ILAR-03648



Surface Kit
ILAR-03649



Recessed Frame
ILAR-03650



Recessed Bracket
ILAR-03651





238—251

ALL LIGHTING SOLUTIONS



# STREET


LIGHT


**ALL LIGHTING SOLUTIONS**

## VERSATILE











| Voltage | Body Material | Beam Angle | Dimmable | IP | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | Die Cast Aluminium | Asymmetric | 1-10V | IP66 | Side Entry/Post Top |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 60W | 3CCT 3000K | 9600lm | Grey RAL 9006 | ILAR-02579 |
| 75W | 4000K-5000K | 12000lm | | ILAR-02580 |
| 100W | | 16000lm | | ILAR-02581 |
| 120W | | 19200lm | | ILAR-02582 |

**On-request**

| | | | |
|---|---|---|---|
| 10W to 230W | 2700K or 3000K or 4000K or 5000K | 1-10V or DALI | Zhaga or NEMA |

**Options (Not included)**



Wall Holder 45° - Antracite - 250xØ60mm
ILAR-01091



Wall Holder 45° - Grey - 250xØ60mm
ILAR-01202



Articulated Adapter Grey - Ø60xØ47mm
ILAR-02027




Corner Holder Grey - Ø60mm
ILAR-01117



## NEXA






| Voltage | Body Material | Beam Angle | Dimmable | IP | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | Die Cast Aluminium | 120° | Optional | IP66 | Side Entry/Post Top |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 50W | 3CCT 3000K | 7000lm | Grey RAL 9006 | ILAR-03294 |
| 100W | 4000K-5000K | 14000lm | | ILAR-03295 |
| 150W | | 21000lm | | ILAR-03296 |

**Options (Not included)**



Wall Holder 45° - Antracite - 250xØ60mm
ILAR-01091




Wall Holder 45° - Grey - 250xØ60mm
ILAR-01202



Articulated Adapter Grey - Ø60xØ47mm
ILAR-02027




Corner Holder Grey - Ø60mm
ILAR-01117

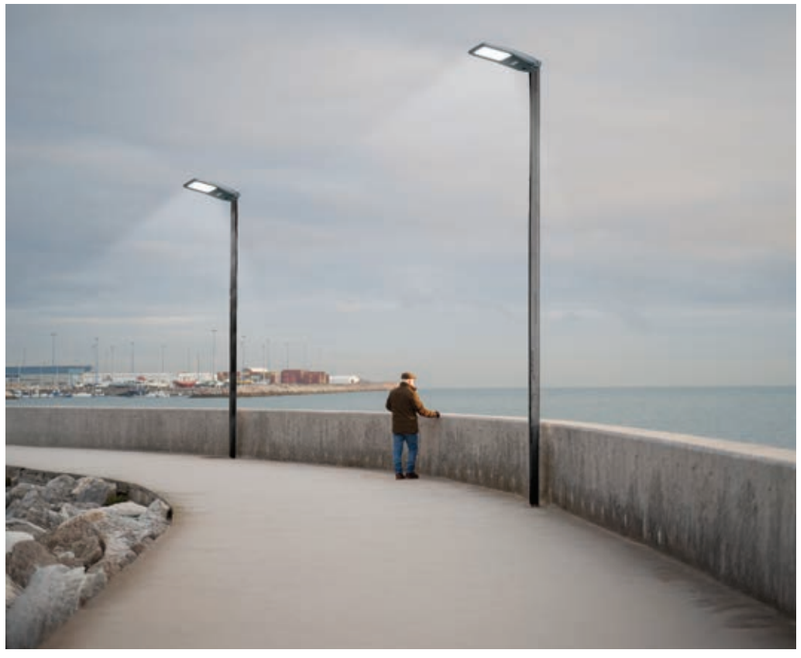

## ZINI






| Voltage | Body Material | Beam Angle | Dimmable | IP | Mounting Type |
|---|---|---|---|---|---|
| 100-240V | Die Cast Aluminium | Asymmetric | NO | IP66 | Side Entry/Post Top |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 30W | 4000K | 4800lm | Grey | ILAR-02120 |
| 50W | | 8000lm | | ILAR-02324 |
| 100W | | 16000lm | | ILAR-02325 |

**On-request**

| | |
|---|---|
| 30W to 100W | 2700K or 3000K or 4000K or 5000K |

**Options (Not included)**



Wall Holder 45° -
Antracite - 250xØ60mm
ILAR-01091



Wall Holder 45° -
Grey - 250xØ60mm
ILAR-01202



Articulated Adapter
Grey - Ø60xØ47mm
ILAR-02027



Corner Holder
Grey - Ø60mm
ILAR-01117






## ARIES





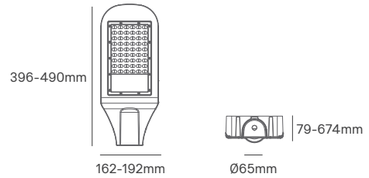


| Voltage | Body Material | Beam Angle | Dimmable | IP | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | Aluminium | 120° | NO | IP65 | Side Entry/Post Top |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 60W | 4000K | 7200lm | Grey | ILAR-00245 |
| 100W | | 12000lm | | ILAR-01009 |
| 150W | | 18000lm | | ILAR-01188 |

**Options (Not included)**



Wall Holder 45° -
Antracite - 250xØ60mm
ILAR-01091



Wall Holder 45° -
Grey - 250xØ60mm
ILAR-01202



Articulated Adapter
Grey - Ø60xØ47mm
ILAR-02027




Corner Holder
Grey - Ø60mm
ILAR-01117

## EXCELSIOR





443.48/493.48/
544.48/714.30mm



559.82/609.82/
660.82/711.82mm


195.63/244.63/
299.63/340mm

| Voltage | Body Material | Beam Angle | IP | Dimmable | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | High Purity Aluminum | Multiple | IP67(OB)/IP66 | 1-10V/ DALI / D4i | Side Entry/Post Top |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Housing Colour | SKU |
|---|---|---|---|---|---|
| 10W-320W Configurable | 3000K/4000K/5000K/6000K | 1800-57600lm | 5 Dimensions | Multiple | On-request |

## ORBIT






| Voltage | Body Material | Beam Angle | Dimmable | IP | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | Die Cast Aluminium | Multiple | 1-10V/ DALI / D4i | IP66 | Post Top |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 20W-100W Configurable | 2700K/3000K/4000K | 15000lm | Multiple | On-request |

## BALLON





Ø450mm

| Voltage | Body Material | Beam Angle | Dimmable | IP | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | Die Cast Aluminium+PC | Multiple | NO | IP65 | Post top |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Housing Colour | SKU |
|---|---|---|---|---|---|
| 20W-50W Configurable | 2700K/3000K/4000K | - | Ø400xmm<br>Ø450xmm | Black | On-request<br>On-request |




## LUCCI







| Voltage | Body Material | Beam Angle | Dimmable | IP | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | Die Cast Aluminium | Multiple | 1-10V/ DALI / D4i | IP66 | Multiple |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Housing Colour | SKU |
|---|---|---|---|---|---|
| 30W-120W Configurable | 3000K/4000K/5000K | 4500lm-18000lm | 700x200x100mm | Black | On-request |
| 30W-120W Configurable | 3000K/4000K/5000K | 4500lm-18000lm | 900x200x100mm | Black | On-request |
| 150W-240W Configurable | 3000K/4000K/5000K | 22500lm-36000lm | 1250x200x100mm | Black | On-request |

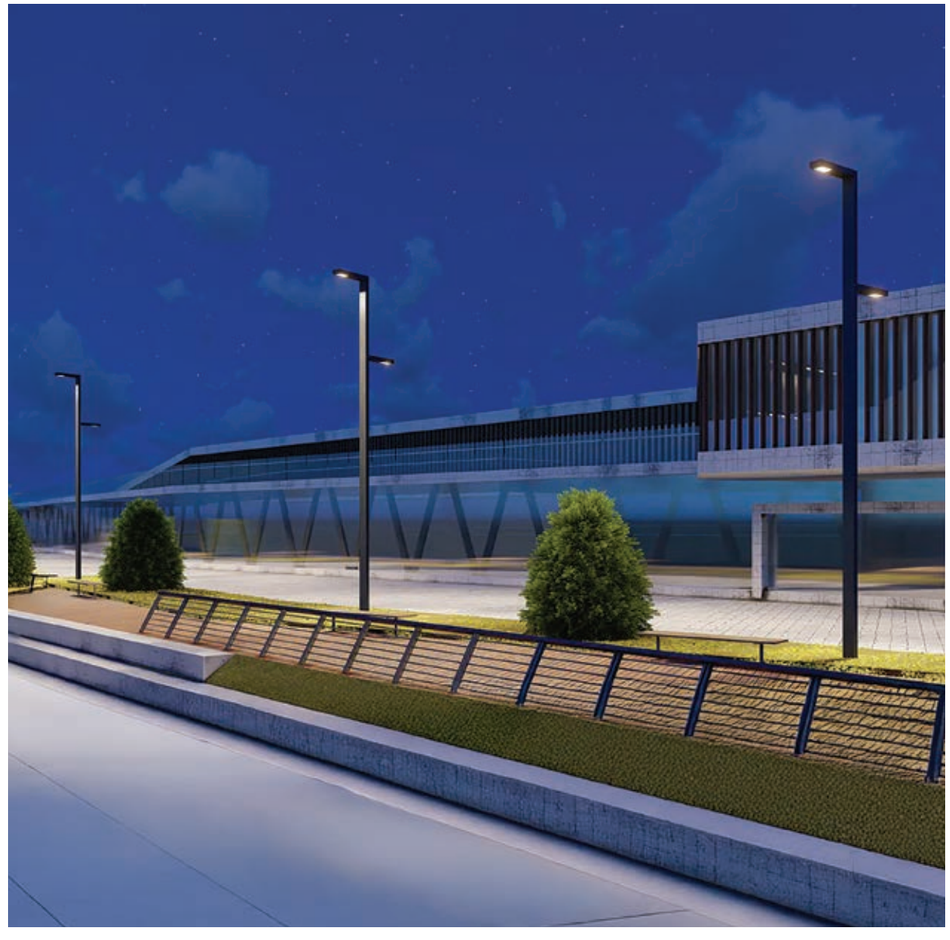

## VILLA







| Voltage | Body Material | Beam Angle | Dimmable | IP | Mounting Type |
|---|---|---|---|---|---|
| 100-240V | Die Cast Aluminium | Multiple | Optional | IP66 | Post Top |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Housing Colour | SKU |
|---|---|---|---|---|---|
| 30W-100W Configurable | 3000K/4000K/5000K | 4500lm-15000lm | 445x855mm | Black | On-request |

## FERNANDINA






| Voltage | Body Material | Beam Angle | Dimmable | IP | Mounting Type |
|---|---|---|---|---|---|
| 100-240V | Die Cast Aluminium+PC | Multiple | Optional | IP66 | Post top |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Housing Colour | SKU |
|---|---|---|---|---|---|
| 30W-100W Configurable | 3000K/4000K/5000K | 4200lm-14000lm | 495x945mm | Black | On-request |

## RETROFIT KIT





| Voltage | Body Material | Beam Angle | Dimmable | IP |
|---|---|---|---|---|
| 220-240V | Die Cast Aluminium | Multiple | Optional | IP66/IP67 |


| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Housing Colour | SKU |
|---|---|---|---|---|---|
| 20W to 50W Configurable | 3000K/4000K/5000K | 7500lm Max. | Multiple | Black or Grey | On-request |



## CONVERT








| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Die Cast Aluminium | OP04 | IP66 | Side Entry/Post Top |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| Switch<br>18W-30W-40W-60W | 3CCT 3000K<br>4000K-5000K | 9000lm | Black RAL 9005 | ILAR-02098 |

**On-request**

| | | | |
|---|---|---|---|
| 10W to 150W | 2700K or 3000K or<br>4000K or 5000K | 1-10V or DALI | Zhaga or NEMA |

**Options (Not included)**



Side Entry Mounting (Rotable)
ILAR-02106



Single Arm Post Top
ILAR-02107




Double Arm Post Top
ILAR-02108



Straight Arm Bracket
ILAR-02099

## URBAN DESIGN II






| Voltage | Body Material | Beam Angle | Dimmable | IP | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | Die Cast Aluminium | Multiple | - | IP66 | Post Top |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 40W | 4000K<br>5000K | 5200lm | Black RAL 9004 | ILAR-01661<br>ILAR-01070 |

**On-request**


| | | | |
|---|---|---|---|
| 20W to 100W | 2700K or 3000K or<br>4000K or 5000K | 1-10V or DALI | Zhaga or NEMA |



## URBAN PRO








| Voltage | Body Material | Beam Angle | Dimmable | IP | Mounting Type |
|---|---|---|---|---|---|
| 100-277V | Die Cast Aluminium | 120° | - | IP66 | Post Top |


| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| Switch<br>30W-40W-50W | 3CCT 3000K<br>4000K-5000K | 8000lm | Black RAL 9004 | ILAR-02271 |

**On-request**

| | | | |
|---|---|---|---|
| 30W to 150W | 2700K or 3000K or<br>4000K or 5000K | 1-10V or DALI | Zhaga or NEMA |

## URBAN EMMA






| Voltage | Body Material | Beam Angle | Dimmable | IP | Mounting Type |
|---|---|---|---|---|---|
| 100-277V | Die Cast Aluminium | 120° | - | IP66 | Side Entry/Post Top |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| Switch<br>18W-30W-40W-60W | 3CCT 3000K<br>4000K-5000K | 8400lm | Black RAL 9017 | ILAR-02097 |

**On-request**

| | | | |
|---|---|---|---|
| 20W to 60W | 2700K or 3000K or<br>4000K or 5000K | 1-10V or DALI | Zhaga or NEMA |






## URBAN ECO








| Voltage | Body Material | Beam Angle | Dimmable | IP | Mounting Type |
|---|---|---|---|---|---|
| 100-277V | Die Cast Aluminium | 120° | NO | IP65 | Side Entry/Post Top |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | SKU |
|---|---|---|---|---|
| 35W | 3CCT 3000K<br>4000K-5000K | 4830lm | Black RAL 9004 | ILAR-01074 |



252—255


# SOLAR

STREET LIGHTING

ALL LIGHTING SOLUTIONS

## LEAN SOLAR







| Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|
| ABS+PC, Aluminum, Anti-UV | 140x70° - TPIII | IP65 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | Charging Time | SKU |
|---|---|---|---|---|---|
| 15W | 4000K | 2250lm | Black | 8-10hrs strong sunshine to fully charge | ILAR-01801 |
| 40W | | 4800lm | | | ILAR-01802 |



## SQUARE SOLAR







| Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|
| Die Cast Aluminium | OP01 | IP66 | Side Entry/Post Top |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | Charging Time | SKU |
|---|---|---|---|---|---|
| 40W | 4000K | 5700lm | Black | - | ILAR-03517 |



## HEKOS SOLAR






| Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|
| Die Cast Aluminium | OP01 | IP65 | Side Entry/Post Top |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | Charging Time | SKU |
|---|---|---|---|---|---|
| 40W | 4000K | 6500lm | Grey | - | ILAR-03509 |
| 60W | | 8500lm | | | ILAR-03510 |
| 80W | | 12000lm | | | ILAR-03511 |

**Options (Not included)**



Remote Hekos Solar
ILAR-03515

## TABITI SOLAR






| Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|
| Die Cast Aluminium | 120° | IP65 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | Charging Time | SKU |
|---|---|---|---|---|---|
| 20W | 2CCT 3000K + 5700K | 3000lm | Black | 7H | ILAR-03505 |
| 35W | | 6000lm | | | ILAR-03506 |
| 50W | | 9000lm | | | ILAR-03507 |




# ATEX

## LIGHTING

ALL LIGHTING SOLUTIONS

## ATEX LINEARTOP






| Voltage | Body Material | Beam Angle | Zone | IP | Mounting Type |
|---|---|---|---|---|---|
| 100-277V | Aluminum Alloy (ADC12) | 120° | 1/21/22 | IP66 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Housing Colour | Size | SKU |
|---|---|---|---|---|---|
| 20W | 5000K | 2800lm | Grey RAL 9006 | 30cm | ILAR-02850 |
| 30W | | 4200lm | | 60cm | ILAR-02851 |
| 40W | | 5600lm | | 120cm | ILAR-02852 |
| 60W | | 8400lm | | 120cm | ILAR-02853 |
| 80W | | 11200lm | | 120cm | ILAR-02854 |

**Options (Not included)**




Atex Junction Box
(4x M20x1.5) IP65
ILAR-03156



Atex Cable Gland
(M20x1.5) IP65
ILAR-03157



## ATEX HIGHTOP






| Voltage | Body Material | Beam Angle | Zone | IP | Dimmable | Mounting Type |
|---|---|---|---|---|---|---|
| 200-250V | Die Cast Aluminium | 90° | 1/21/22 | IP66 | 0-10V | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Housing Colour | SKU |
|---|---|---|---|---|---|
| 100W | 5000K | 14000lm | Ø370x197mm | Grey | ILAR-02015 |
| 120W | 4000K | 21000lm | | | ILAR-02521 |
| 120W | 5000K | 16800lm | | | ILAR-02118 |
| 150W | 5000K | 21000lm | | | ILAR-02207 |
| 200W | 5000K | 28000lm | | | ILAR-02016 |

**Options (Not included)**




Grill for Hightop (IK10)
ILAR-02019



## ATEX EMERGENCY






| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 110V - 277V | Die Cast Aluminium | 120° | IP66 | Surface |


| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Housing Colour | SKU |
|---|---|---|---|---|---|
| 5W | 6000K | 400lm | 476x199x98mm | Grey | ILEM-00048 |



## ATEX FLOODTOP











**Options (Not included)**



Grill for Floodtop (IK10)
ILAR-02017

| Voltage | Body Material | Beam Angle | Zone | IP | Dimmable | Mounting Type |
|---|---|---|---|---|---|---|
| 200-250V | Die Cast Aluminium | 90° | 1/21/22 | IP66 | 0-10V | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Housing Colour | SKU |
|---|---|---|---|---|---|
| 80W | 5000K | 11200lm | 320x261x240mm | Grey | ILAR-02368 |
| 150W | 4000K | 21000lm | | | ILAR-02641 |
| 150W | 5000K | 21000lm | | | ILAR-02014 |
| 200W | 5000K | 28000lm | | | ILAR-02208 |

260–275


# MOTION DETECTORS

SENSORS

ALL LIGHTING SOLUTIONS

## ST02







| Voltage | Detection Angle | IP | Type | Dimming | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | 160° | IP20 | Infrared | No | Recessed |

| Rated Load | Detection Distance | Installation Height | Installation | Size | Cut-out | SKU |
|---|---|---|---|---|---|---|
| 500W | 4-9m | 1-1.8m | Wall | 80x80x24.7mm | 48.5x48.5mm | ILAR-00118 |

## ST31







| Voltage | Detection Angle | IP | Type | Dimming | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | 190° | IP20 | Infrared | No | Recessed |

| Rated Load | Detection Distance | Installation Height | Installation | Size | Cut-out | SKU |
|---|---|---|---|---|---|---|
| 500W | 4-9m | 1-1.8m | Wall | 80x80x33.1mm | 48x48mm | ILAR-00495 |

## ST31C






| Voltage | Detection Angle | IP | Type | Dimming | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | 190° | IP20 | Infrared | No | Recessed |

| Rated Load | Detection Distance | Installation Height | Installation | Size | Cut-out | SKU |
|---|---|---|---|---|---|---|
| 500W | 10m max | 1-1.8m | Wall | 80x80x59.1mm | 50x50mm | ILAR-01059 |

## ST32







| Voltage | Detection Angle | IP | Type | Dimming | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | 160° | IP20 | Infrared | No | Recessed |

| Rated Load | Detection Distance | Installation Height | Installation | Size | Cut-out | SKU |
|---|---|---|---|---|---|---|
| 500W | 9m | 1-1.8m | Wall | 80x80x33.1mm | 48x48mm | ILAR-00258 |



## ST754







| Voltage | Detection Angle | IP | Type | Dimming | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | 180° | IP20 | Micro-ondas | No | Recessed |

| Rated Load | Detection Distance | Installation Height | Installation | Size | Cut-out | SKU |
|---|---|---|---|---|---|---|
| 1200W | 5-15m | 1-1.8m | Wall | 80x80x32mm | 50x50mm | ILAR-00305 |

## ST11







| Voltage | Detection Angle | IP | Type | Dimming | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | 180° | IP44 | Infrared | No | Surface |

| Rated Load | Detection Distance | Installation Height | Installation | Size | SKU |
|---|---|---|---|---|---|
| 800W | 12m | 1.8-2.5m | Wall | 80.2x55.5x68.2mm | ILAR-00257 |

## MOTION SENSOR







| Voltage | Detection Angle | IP | Type | Dimming | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | 180°/360° | IP44 | Infrared | No | Surface |

| Rated Load | Detection Distance | Installation Height | Installation | Size | Colour | SKU |
|---|---|---|---|---|---|---|
| 1200W | 12m | 1.8-2.5m | Wall | 80.2x68.2x55.5mm | White<br>All Black | ILAR-03577<br>ILAR-03578 |

## ST09







| Voltage | Detection Angle | IP | Type | Dimming | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | 180° | IP44 | Infrared | No | Surface |

| Rated Load | Detection Distance | Installation Height | Installation | Size | SKU |
|---|---|---|---|---|---|
| 1200W | 12m | 1.8-2.5m | Wall | 84.4x60.4mm | ILAR-00121 |

## ST18B







| Voltage | Detection Angle | IP | Type | Dimming | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | 240° | IP65 | Infrared | No | Surface / Corner |

| Rated Load | Detection Distance | Installation Height | Installation | Size | SKU |
|---|---|---|---|---|---|
| 1200W | 8m | 1.8-2.5m | Wall | 125.2x72.7x71.4mm | ILAR-01061 |

## AR18X









| Voltage | Detection Angle | IP | Type | Dimming | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | 240° | IP65 | Infrared | No | Surface |

| Rated Load | Detection Distance | Installation Height | Installation | Size | Colour | SKU |
|---|---|---|---|---|---|---|
| 2000W | 8-14m | 1.8-2.5m | Wall | 100.3x75x62mm | White<br>Black | ILAR-02882<br>ILAR-02883 |

## ST15







| Voltage | IP | Type | Dimming | Mounting Type |
|---|---|---|---|---|
| 220-240V | IP65 | Infrared | No | Surface |

| Rated Load | Detection Distance | Installation Height | Installation | Size | Detection Angle | Colour | SKU |
|---|---|---|---|---|---|---|---|
| 1200W | 12m | 1.8-2.5m | Wall | 117.2x80x51.5mm | 180°<br>180°<br>180°/360° | White<br>All Black<br>White | ILAR-00304<br>ILAR-02589<br>ILAR-00570 |

## ST701E







| Voltage | Beam Angle | IP | Type | Dimming | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | 180°/360° | IP20 | Microwave | No | Surface |

| Rated Load | Detection Distance | Installation Height | Installation | Size | SKU |
|---|---|---|---|---|---|
| 1200W | 5-15m Wall<br>1-8m Ceiling | 1.5-3.5m Wall<br>2-8m Ceiling | Wall/Ceiling | 36.8x55.4x25.5mm | ILAR-00124 |



## MICROWAVE / PRESENCE






| Voltage | Beam Angle | IP | Type | Dimming | Mounting Type |
|---|---|---|---|---|---|
| 110-240V | 180°/360° | IP20 | Microwave / Presence | No | Surface |

| Rated Load | Detection Distance | Installation Height | Installation | Size | SKU |
|---|---|---|---|---|---|
| 1200W (220V)<br>600W (110V) | 6m Wall<br>1-4m Ceiling | 1.2-5m Wall<br>2-4m Ceiling | Wall/Ceiling | 93x77.9x45x24.5mm | ILAR-03572 |

## SENSOR PHOTOCELL









| Voltage | IP | Type | Mounting Type |
|---|---|---|---|
| 220-240V | IP65 | Light-control Sensor | Surface |

| Rated Load | Ambient Lighting | Size | SKU |
|---|---|---|---|
| 20A<br>15A | <2-100LUX | 90x66x35mm<br>48.8x27.3x63.4 / 47.9x42.1x28.8m | ILAR-03579<br>ILAR-03580 |

## ST24 DIP SWITCH






| Voltage | Detection Angle | IP | Type | Dimming | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | 120°/360° | IP20 | Infrared | No | Surface |

| Rated Load | Detection Distance | Installation Height | Installation | Size | SKU |
|---|---|---|---|---|---|
| 800W | 3-6m | 1.5-3.5m Wall<br>2-8m Ceiling | Wall/Ceiling | 55.4x25.5x36.8mm | ILAR-00519 |

## ST302






| Voltage | Detection Angle | IP | Type | Dimming | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | 360° | IP44 | Twilight | No | Surface |

| Rated Load | Installation Height | Installation | Size | SKU |
|---|---|---|---|---|
| 10A | 1.5-5m | Wall | Ø63x76.7mm | ILAR-00520 |

## ST330 1-10V






| Voltage | Detection Angle | IP | Type | Dimming | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | 360° | IP20 | Light Sensor | Yes | Surface |


| Dimming | Installation Height | Installation | Size | SKU |
|---|---|---|---|---|
| 1%-100% | 1.5-5m | False Ceiling | 38x69mm | ILAR-00606 |

## ST40











| Voltage | Detection Angle | IP | Type | Dimming | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | 360° | IP20 | Infrared | No | Recessed |

| Rated Load | Detection Distance | Installation Height | Installation | Size | Cut-out | Colour | SKU |
|---|---|---|---|---|---|---|---|
| 800W | 8m | 2.2-4m | False Ceiling | Ø81.2x65.1mm | Ø54mm | White<br>Black<br>All Black | ILAR-01179<br>ILAR-01956<br>ILAR-02591 |

## ST41









| Voltage | Detection Angle | IP | Type | Dimming | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | 360° | IP20 | Infrared | No | Recessed |

| Rated Load | Detection Distance | Installation Height | Installation | Size | Cut-out | Colour | SKU |
|---|---|---|---|---|---|---|---|
| 1200W | 6m | 2.2-4m | False Ceiling | Ø76x75.6mm | Ø61.5mm | White<br>All Black | ILAR-00120<br>ILAR-02592 |

## AR41








| Voltage | Detection Angle | IP | Type | Dimming | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | 360° | IP54 | Infrared/Presence | No | Recessed |


| Rated Load | Detection Distance | Installation Height | Installation | Size | Cut-out | Colour | SKU |
|---|---|---|---|---|---|---|---|
| 1200W | 6m Presence<br>20m Motion | 2.2-6m | False Ceiling | Ø87.3x87.3mm | Ø63-66mm | White<br>All Black | ILAR-02880<br>ILAR-02881 |



## ST753









| Voltage | Detection Angle | IP | Type | Type | Dimming | Mounting Type |
|---|---|---|---|---|---|---|
| 110-240V | 360° | IP65 | Microwave/Presence | Microwave | No | Recessed |

| Rated Load | Detection Distance | Installation Height | Installation | Size | Cut-out | Colour | SKU |
|---|---|---|---|---|---|---|---|
| 2000W | 6m | 2-4m | False Ceiling | Ø76x66.2mm<br>76x76x66.2mm | Ø63-66mm | White<br>White | ILAR-02159<br>ILAR-02795 |

## ST40A









| Voltage | Detection Angle | IP | Type | Dimming | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | 360° | IP20 | Infrared | No | Recessed |

| Rated Load | Detection Distance | Installation Height | Installation | Size | Cut-out | Colour | SKU |
|---|---|---|---|---|---|---|---|
| 800W | 8m | 2.2m-4m | False Ceiling | Ø50x62mm | Ø40mm | White<br>Black | ILAR-02054<br>ILAR-03728 |

## ST331 1-10V







| Voltage | Detection Angle | IP | Type | Dimming | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | 360° | IP20 | Infrared | No | Recessed |

| Dimming | Detection Distance | Installation Height | Installation | Size | Cut-out | SKU |
|---|---|---|---|---|---|---|
| 1%-100% | 1.8-4m | 2.2m-4m | False Ceiling | Ø43x43.3x34mm | Ø33mm | ILAR-01865 |

## ST41H









| Voltage | Detection Angle | IP | Type | Dimming | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | 360° | IP20 | Infrared | No | Recessed |

| Rated Load | Detection Distance | Installation Height | Installation | Size | Cut-out | SKU |
|---|---|---|---|---|---|---|
| 1200 | 8m | 1.8m-4m | False Ceiling | Ø76x49mm<br>76x76x49mm | Ø61.5x44mm<br>Ø61.5x44mm | ILAR-02031<br>ILAR-02794 |

## INFRARED PRESENCE SENSOR







| Voltage | Detection Angle | IP | Type | Dimming | Mounting Type |
|---|---|---|---|---|---|
| 110-240V | 360° | IP54 | Infrared/Presence | No | Recessed |

| Rated Load | Detection Distance | Installation Height | Installation | Size | Cut-out | SKU |
|---|---|---|---|---|---|---|
| 2000W | 2-6m | 2.2-4m | False Ceiling | Ø76x71.36x66.36x61.50mm | Ø63x66mm | ILAR-03573 |

## LONG RANGE







| Voltage | Detection Angle | IP | Type | Dimming | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | 360° | IP44 | Infrared | No | Surface/Recessed |

| Rated Load | Detection Distance | Installation Height | Installation | Size | Cut-out | SKU |
|---|---|---|---|---|---|---|
| 2000W | 8m | 4-12m | False Ceiling | Ø111.5x62.5mm | Ø57x80mm | ILAR-03576 |

## ST42C







| Voltage | Detection Angle | IP | Type | Dimming | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | 360° | IP20 | Infrared | No | Recessed |

| Rated Load | Detection Distance | Installation Height | Installation | Size | Cut-out | SKU |
|---|---|---|---|---|---|---|
| 2000W | 20m | 2.2-6m | False Ceiling | Ø100x92x56.2mm | Ø76mm | ILAR-02451 |

## ST05DA3 DALI







| Voltage | Detection Angle | IP | Type | Dimming | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | 360° | IP54 | Infrared/DALI | No | Recessed |

| Rated Load | Detection Distance | Installation Height | Output | Installation | Size | Cut-out | SKU |
|---|---|---|---|---|---|---|---|
| 2000W | 20m | 2.2-6m | CH1-CH2 | False Ceiling | Ø102x88.6mm | Ø55mm | ILAR-02287 |



## ST05DA1 DALI







| Voltage | Detection Angle | IP | Type | Dimming | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | 360° | IP54 | Infrared/DALI | DALI | Surface |

| Rated Load | Detection Distance | Installation Height | Output | Installation | Size | SKU |
|---|---|---|---|---|---|---|
| 2000W | 12m | 2.2-4m | CH1-CH2 | Ceiling | Ø102x51.7mm | ILAR-02286 |

## ST759







| Voltage | Detection Angle | IP | Type | Dimming | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | 360° | IP65 | Microwave | DALI | Surface |

| Rated Load | Detection Distance | Installation Height | Installation | Size | SKU |
|---|---|---|---|---|---|
| 2000W | 8-20 | 4-15m | Industry/Garages | Ø71.5x59mm | ILAR-00521<br>ILAR-02056<br>ILAR-02057<br>ILAR-00522 |

## LONG RANGE







| Voltage | Detection Angle | IP | Type | Dimming | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | 360° | IP65 | Infrared | No | Surface |

| Rated Load | Detection Distance | Installation Height | Installation | Size | SKU |
|---|---|---|---|---|---|
| 2000W | 20m | 2.2-6m | Ceiling | 102.5x58.8mm | ILAR-01866 |

## ST05A






| Voltage | Detection Angle | IP | Type | Dimming | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | 360° | IP44 | Infrared | No | Surface |

| Rated Load | Detection Distance | Installation Height | Installation | Size | SKU |
|---|---|---|---|---|---|
| 1200W | 6m | 2.2-4m | Ceiling | Ø80x41mm | ILAR-00119 |

## MICROWAVE PRESENCE






| Voltage | Detection Angle | IP | Type | Dimming | Mounting Type |
|---|---|---|---|---|---|
| 110-240V | 360° | IP20 | Microwave/Presence | No | Surface |

| Rated Load | Detection Distance | Installation Height | Installation | Size | SKU |
|---|---|---|---|---|---|
| 2000W | 6m | 2-4m | Ceiling | Ø115x22.5mm | ILAR-02162 |

## MICROWAVE LONG RANGE






| Voltage | Detection Angle | IP | Type | Dimming | Mounting Type |
|---|---|---|---|---|---|
| 110-240V | 360° | IP20 | Microwave | No | Surface |

| Rated Load | Detection Distance | Installation Height | Installation | Size | SKU |
|---|---|---|---|---|---|
| 2000W | 8m | 4-15m | Ceiling | Ø115x22.5mm | ILAR-03575 |

## INFRARED PRESENCE






| Voltage | Detection Angle | IP | Type | Dimming | Mounting Type |
|---|---|---|---|---|---|
| 110-240V | 360° | IP20 | Infrared/Presence | No | Surface |

| Rated Load | Detection Distance | Installation Height | Installation | Size | SKU |
|---|---|---|---|---|---|
| 2000W | 6m | 2-4m | Ceiling | Ø115x22.5mm | ILAR-03574 |

## INFRARED






| Voltage | Detection Angle | IP | Type | Dimming | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | 360° | IP20 | Infrared | No | Surface |

| Rated Load | Detection Distance | Installation Height | Installation | Size | Colour | SKU |
|---|---|---|---|---|---|---|
| 2000W | 6m | 2.2-4m | Ceiling | Ø115x24.3mm | White | ILAR-00259 |
| | | | | | Black | ILAR-01957 |
| | | | | | All Black | ILAR-02590 |



## ST05L







| Voltage | Detection Angle | IP | Type | Dimming | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | 360° | IP65 | Infrared | No | Surface |

| Rated Load | Detection Distance | Installation Height | Installation | Size | SKU |
|---|---|---|---|---|---|
| 2000W | 8m | 2.2-4m | Ceiling | Ø110x27mm | ILAR-01545 |

## AR46X/G






| Voltage | Detection Angle | IP | Type | Dimming | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | 360° | IP20 | Infrared/Presence | No | Surface |

| Rated Load | Detection Distance | Installation Height | Installation | Size | Colour | SKU |
|---|---|---|---|---|---|---|
| 2000W | 6m Presence<br>20m Motion | 2.2-6m | Ceiling | Ø83x49.5mm | White | ILAR-02878 |
| | | | | | Black | ILAR-02879 |

## ST07B







| Voltage | Detection Angle | IP | Type | Dimming | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | 360° | IP20 | Infrared | No | Surface |

| Rated Load | Detection Distance | Installation Height | Installation | Size | SKU |
|---|---|---|---|---|---|
| 2000W | 30m | 2.2m-4m | Ceiling | Ø103x53.5mm | ILAR-02125 |

## ST705A






| Voltage | Detection Angle | IP | Type | Dimming | Mounting Type |
|---|---|---|---|---|---|
| 110-240V | 360° | IP44 | Infrared | No | Surface |

| Power | Detection Distance | Installation Height | Installation Type | Size | SKU |
|---|---|---|---|---|---|
| 1x E27 (60W max) | 2-4m | 2-4m | Ceiling | Ø300x112mm | ILAR-00123 |

## LED PANEL WITH SENSOR






| Voltage | Detection Angle | IP | Type | Dimming | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | 120°/360° | IP20 | Infrared | No | Surface Wall/Ceiling |

| Power | Color Temperature (CCT) | Total Luminous Flux (±5%) | Detection Distance | Installation Height | Size | SKU |
|---|---|---|---|---|---|---|
| Switch 10W/15W/18W | 3CCT 3000K-4000K-6000K | 1300lm | 8m Wall 6m Ceiling | 1.8-2.5m Wall 2.2-4m Ceiling | Ø230.7x19mm | ILAR-01868 |

## PLAFON WITH SENSOR







| Voltage | Detection Angle | IP | Type | Dimming | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | 120°/360° | IP65 | Infrared | No | Surface |

| Power | Color Temperature (CCT) | Total Luminous Flux (±5%) | Detection Distance | Installation Height | Size | SKU |
|---|---|---|---|---|---|---|
| 20W | 3000K<br>4000K | 2500lm | 8m | 2-4m | Ø300x40mm | ILAR-01668<br>ILAR-01062 |

## LUMINAIRE WITH SENSOR







| Voltage | Detection Angle | IP | Type | Dimming | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | 360° | IP20 | Infrared | No | Surface |

| Power | Color Temperature (CCT) | Total Luminous Flux (±5%) | Detection Distance | Installation Height | Size | Battery | SKU |
|---|---|---|---|---|---|---|---|
| 16W<br>16W (Emergency) | 4000K<br>4000K | 1150lm | 6m | 2-4m | Ø290x60mm | NO<br>5H - 65lm | ILAR-00306<br>ILAR-01679 |



## PLAFON WITH SENSOR







| Voltage | Detection Angle | IP | Type | Dimming | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | 360° | IP54 | Infrared | No | Surface |

| Power | Color Temperature (CCT) | Total Luminous Flux (±5%) | Detection Distance | Installation Height | Size | SKU |
|---|---|---|---|---|---|---|
| 15W | 4000K | 1300lm | 6m | 2.2-4m | Ø260x49.4mm | ILAR-03570 |

## WALL LUMINAIRE WITH SENSOR







| Voltage | Detection Angle | IP | Type | Dimming | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | 140° | IP65 | Infrared | No | Surface Wall |

| Power | Color Temperature (CCT) | Total Luminous Flux (±5%) | Detection Distance | Installation Height | Size | SKU |
|---|---|---|---|---|---|---|
| Switch 10W/15W/18W | 3CCT 3000K-4000K-6000K | 1900lm | 9m | 1.8-2.5m | 212x119.2x52.6x45.6mm | ILAR-03571 |







| Voltage | Detection Angle | IP | Type | Dimming | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | 140° | IP65 | Infrared | No | Surface Wall |

| Power | Color Temperature (CCT) | Total Luminous Flux (±5%) | Detection Distance | Installation Height | Size | SKU |
|---|---|---|---|---|---|---|
| 20W | 4000K | 1900lm | 9m | 1.8-2.5m | 210x210x41mm | ILAR-02126 |






| Voltage | Detection Angle | IP | Type | Dimming | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | 140° | IP65 | Infrared | No | Surface Wall |

| Power | Color Temperature (CCT) | Total Luminous Flux (±5%) | Detection Distance | Installation Height | Size | SKU |
|---|---|---|---|---|---|---|
| 20W | 4000K | 1700lm | 9m | 1.8-2.5m | Ø149.3x196.5x82mm | ILAR-01060 |

## WALL LUMINAIRE WITH SENSOR







| Voltage | Detection Angle | IP | Type | Dimming | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | 140° | IP65 | Infrared | No | Surface Wall |

| Power | Color Temperature (CCT) | Total Luminous Flux (±5%) | Detection Distance | Installation Height | Size | SKU |
|---|---|---|---|---|---|---|
| 20W | 4000K | 2000lm | 9m | 1.8-2.5m | 250x188x66mm | ILAR-01063 |







| Voltage | Detection Angle | IP | Type | Dimming | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | 220° | IP65 | Infrared | No | Surface Wall |

| Power | Color Temperature (CCT) | Total Luminous Flux (±5%) | Detection Distance | Installation Height | Size | SKU |
|---|---|---|---|---|---|---|
| 30W | 4000K | 2200lm | 5-10m | 1.8-2.5m | 199x188x225mm | ILAR-01064 |

## BULB WITH SENSOR






| Voltage | Detection Angle | IP | Type | Dimming | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | 360° | IP20 | Microwave | No | Screw |

| Power | Color Temperature (CCT) | Total Luminous Flux (±5%) | Detection Distance | Installation Height | Size | SKU |
|---|---|---|---|---|---|---|
| 7W | 4000K | 600lm | 5m | 2.3-5m | Ø60x108mm | ILAR-02055 |



276—285






# EMERGENCY

## LIGHTING

ALL LIGHTING SOLUTIONS

## SAFELUX







| Voltage | Body Material | IP | Type | Prepared for Remote Control | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | Polycarbonate Diffuser & ABS Housing | IP65 | Maintained/Non Maintained | YES | Recessed/Surface |

| Model | Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Battery | SKU |
|---|---|---|---|---|---|
| Safelux | 3.8W | 4000K<br>6000K | 200lm | 3 Hours<br>3.6V 1500mAh NI-MH | ILEM-00049<br>ILEM-00034 |


## SAFELUX DOUBLE






| Voltage | Body Material | IP | Type | Prepared for Remote Control | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | Polycarbonate Diffuser & ABS Housing | IP65 | Maintained/Non Maintained | YES | Recessed/Surface |

| Model | Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Battery | SKU |
|---|---|---|---|---|---|
| Safelux Double | 3.8W | 6000K | 200lm | 3.6V 1500mAh NI-MH | ILEM-00071 |

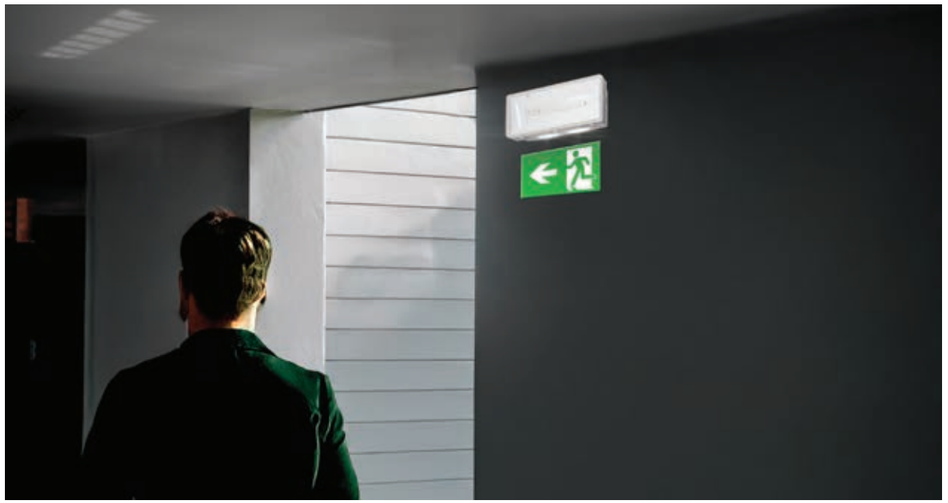

**Options for Safelux and Safelux Double (Not included)**



Edge-lit Exit
267x100x10mm
ILEM-00035



Difusor
ILEM-00040



Recessed Kit
ILEM-00043



Protection Grid
ILEM-00036




Pictograma
ILEM-00045



## EASYLUX II






| Voltage | Body Material | IP | Type | Prepared for Remote Control | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | ABS base + Polycarbonate Cover | IP20 | Maintained/Non Maintained | YES | Recessed/Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Battery | SKU |
|---|---|---|---|---|
| 3W | 6000K | 150lm | 3 Hours<br>3.2V 1.5Ah LifePO4 | ILEM-00064 |


**Options (Not included)**



Recessed Kit
ILEM-00070

## DUOLUX







| Voltage | Body Material | IP | Type | Mounting Type |
|---|---|---|---|---|
| 220-240V | Polycarbonate Case | IP20 | Maintained/Non Maintained | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Battery | SKU |
|---|---|---|---|---|
| 3W | 6000K | 40-70lm | 3 Hours<br>3.7V 1500mAh Li-ion battery | ILEM-00066 |

## LONGLUX







| Voltage | Body Material | IP | Type | Prepared for Remote Control | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | Polycarbonate Case | IP65 | Maintained/Non Maintained | YES | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Battery | SKU |
|---|---|---|---|---|
| 1W | 6000K | 150lm | 3 Hours<br>LiFePO4 3.2V 1500mAh | ILEM-00076 |



## POWERLUX






| Voltage | Body Material | IP | Type | Mounting Type |
|---|---|---|---|---|
| 220-240V | ABS base + Polycarbonate Cover | IP65 | Maintained/Non Maintained | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Battery | SKU |
|---|---|---|---|---|
| 8W | 6000K | 500lm | 3 Hours | ILEM-00061 |


**Options (Not included)**



Pictograma
ILEM-00045

## POWERLUX SLIM






| Voltage | Body Material | IP | Type | Prepared for Remote Control | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | ABS base + Polycarbonate Cover | IP65 | Maintained/Non Maintained | YES | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Battery | SKU |
|---|---|---|---|---|
| 8W | 6000K | 800lm | 3 Hours<br>3.7V 4000mAh Li (NiCoMn) | ILEM-00065 |

**Options (Not included)**



Difusor
ILEM-00075




Difusor
ILEM-00067



Pictograma
ILEM-00045

## DOTLUX







| Voltage | Body Material | IP | Type | Mounting Type |
|---|---|---|---|---|
| 220-240V | Polycarbonate Diffuser & ABS Housing | IP20 | Non Maintained<br>Maintained/Non Maintained | Recessed/Surface |

| Model | Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Battery | Size | Cut-out | SKU |
|---|---|---|---|---|---|---|---|
| Dotlux | 2W | 6500K | 200lm | 3 Hours LiFePO4 6.4V600mAh | Ø130x121x175mm | Ø115mm-Ø120mm | ILEM-00051 |

## DOTLUX PRO






| Voltage | Body Material | IP | Type | Mounting Type |
|---|---|---|---|---|
| 220-240V | Polycarbonate Diffuser & ABS Housing | IP20 | Non Maintained<br>Maintained/Non Maintained | Recessed/Surface |

| Model | Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Battery | Size | Cut-out | SKU |
|---|---|---|---|---|---|---|---|
| Dotlux PRO | 6W | 6500K | 450lm | 3 Hours 3.6V 600mAh Ni-Cad | Ø140x55.3mm | Ø115mm-Ø120mm | ILEM-00052 |

**Options for Dotlux and Dotlux PRO (Not included)**




Surface Kit
ILEM-00053



IP65 Kit
ILEM-00058

## EMERGENCY PROJECTOR






| Voltage | Body Material | IP | Type | Prepared for Remote Control | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | Polycarbonate Diffuser & ABS Housing | IP65 | Non Maintained | YES | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Battery | SKU |
|---|---|---|---|---|
| 6.8W | 6500K | 750lm | 3 Hours 12V2.8Ah Ni-Cad | ILEM-00033 |
| 17W | 6500K | 2000lm | 3 Hours 22.2V 2Ah Ni-Cad | ILEM-00059 |



## DLUX







| Voltage | Body Material | IP | Type | Prepared for Remote Control | Mounting Type |
|---|---|---|---|---|---|
| 220-240V | Polycarbonate | IP42 | Maintained/Non Maintained | YES | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Battery | SKU |
|---|---|---|---|---|
| 4W | 4000K | 300lm | 3 Hours<br>3.2V 3200mAh<br>LiFePO4 battery | ILEM-00081 |

## SIGLUX 5-IN-1






| Voltage | Body Material | IP | Type |
|---|---|---|---|
| 220-240V | PMMA Exit Panel & Polycarbonate | IP20 | Maintained/Non Maintained |

| Model | Power | Total Luminous Flux (±5%) | Battery | Mounting Type | SKU |
|---|---|---|---|---|---|
| Siglux | 2.5W | 100lm | 6 Hours 3.6V 500mAH NiCad | Surface | ILEM-00054 |
| Siglux 5-in-1 | 3W | 100lm | 3 Hours 3.2V 1.6Ah LiFePO4 | Surface/Suspended/<br>Wall/Recessed | ILEM-00072 |

**Options (Not included)**



White Recessed Kit for 5-in-1
ILEM-00073




Black Recessed Kit for 5-in-1
ILEM-00074

## ACCESSORIES


| | | Housing Colour | IP | Body Material | SKU |
|---|---|---|---|---|---|
|  | Remote Controller 02TIE01 AL | White | IP20 | Aluminium | ILEM-00047 |
|  | Emergency Kit for LED Panel and Downlights Output: 20-55V | White | IP20 | Aluminium | ILEM-00062 |
|  | Emergency Kit for LED Panel and Downlights Output: 60-300V | White | IP20 | Aluminium | ILEM-00063 |
|  | Emergency Kit for LED Tube 8-25W | White | IP20 | Aluminium | ILEM-00027 |

# Emergency Lighting Controls

Automatic Function test of the luminaires
Automatic Duration test of the batteries
Real-time Dashboard with the state of all luminaries
Automated Failure Reporting

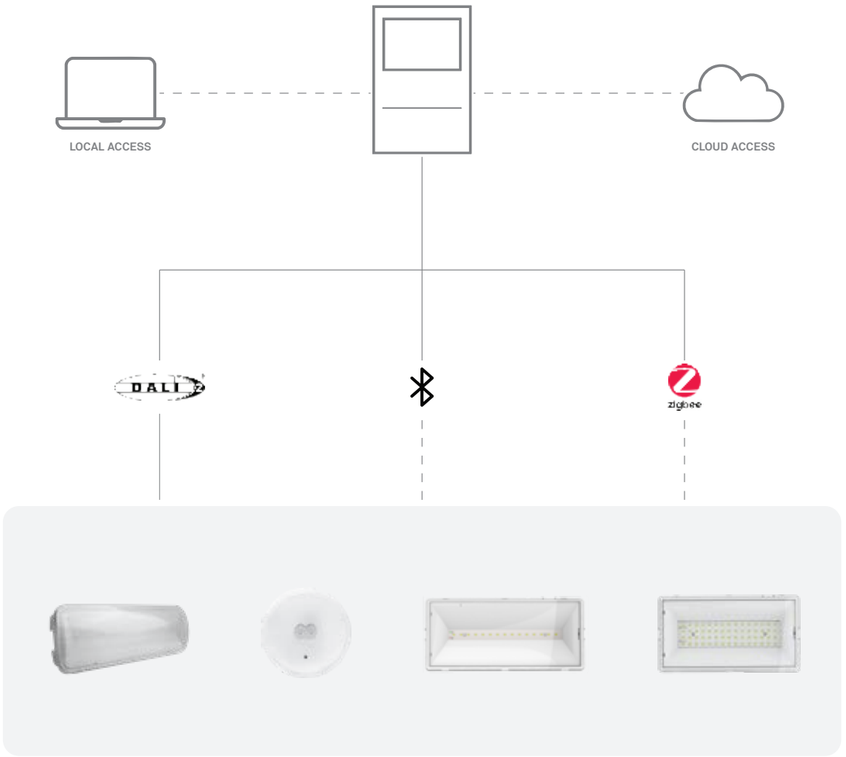

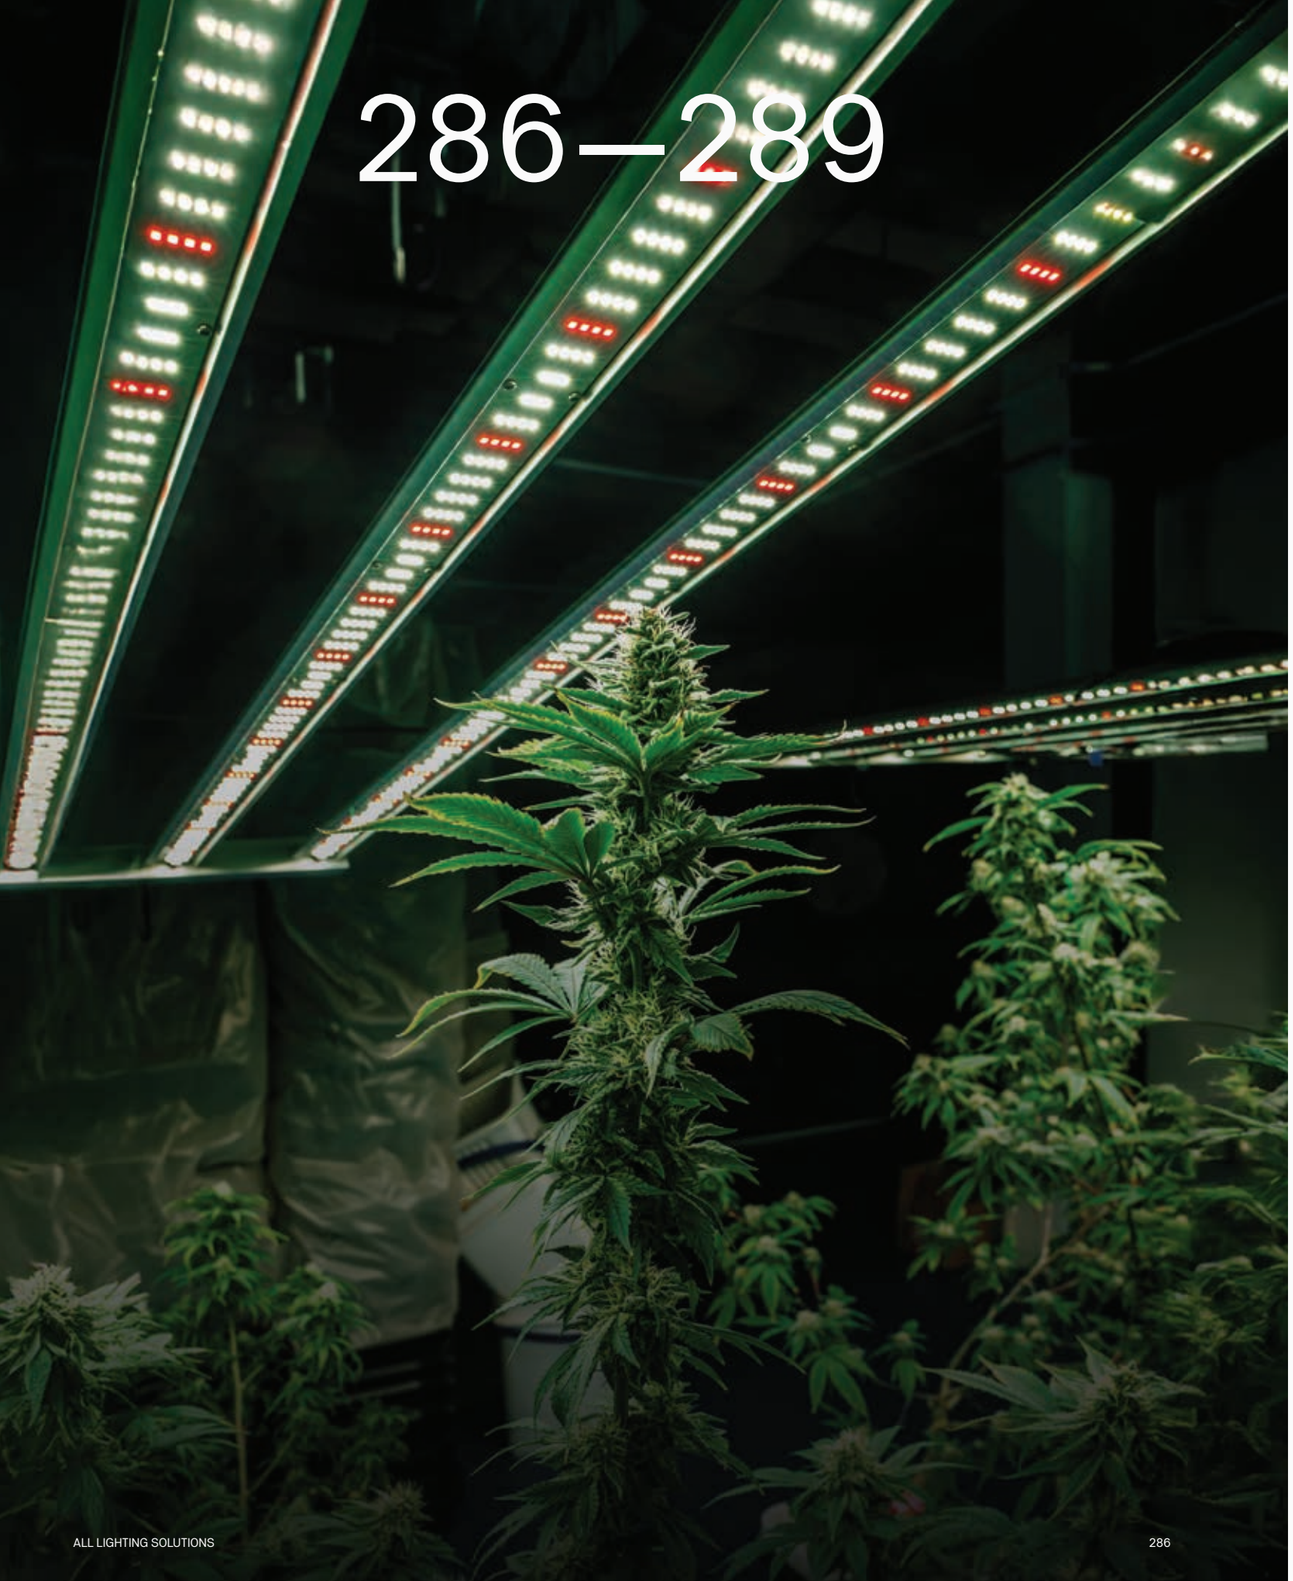



# HORTICULTURE

LIGHTING

## ALL LIGHTING SOLUTIONS

## HORTI ONE







| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminium + Glass cover | 120° to 150° | IP65 | Ceiling Mounting |

| Power | System Efficacy | PPF Output | Dimming Options | SKU |
|---|---|---|---|---|
| 600W | ≥2.8umol/J | 2100μmol/s | 0-10V | On-request |
| 830W | ≥3.5umol/J | 2910μmol/s | | |

## HORTI LINEAR






| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminium + Glass cover | 120° | IP65 | Ceiling Mounting |

| Power | System Efficacy | PPF Output | Dimming Options | SKU |
|---|---|---|---|---|
| 320W | 2.8umol/J | 900μmol/s | 0-10V | On-request |

## HORTI TUBE







| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminium | 120° to 150° | IP65 | Ceiling Mounting |

| Power | System Efficacy | PPF Output | Dimming Options | SKU |
|---|---|---|---|---|
| 50W | 2.5umol/J | 125μmol/s | 0-10V | On-request |
| 75W | | 187.5μmol/s | | |
| 100W | | 250μmol/s | | |

## HORTI FRAME EVO






| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminium | 120° | IP65 | Ceiling Mounting |

| Power | System Efficacy | PPF Output | Dimming Options | SKU |
|---|---|---|---|---|
| 720W | 2.7umol/J | 1750μmol/s | 0-10V | On-request |
| 830W | 2.8umol/J | 2330μmol/s | | |

## HORTI SLIM






| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 220-240V | Aluminium | 120° | IP65 | Ceiling Mounting |

| Power | System Efficacy | PPF Output | Dimming Options | SKU |
|---|---|---|---|---|
| 18W | 2.20umol/J | >40μmol/s | 0-10V | On-request |

# FITTING

## GU10

ALL LIGHTING SOLUTIONS

## ACCESSORIES GU10

FIXED IP65

### MACH SQUARE



| Size | Cut-out | IP | Installation | Body Material | Housing Colour | SKU |
|---|---|---|---|---|---|---|
| 92x92mm | 82mm | IP65 | Recessed | Aluminium | White | ILAR-02467 |
| | | | | | Black | ILAR-02584 |

### MACH ROUND



| Size | Cut-out | IP | Installation | Body Material | Housing Colour | SKU |
|---|---|---|---|---|---|---|
| Ø92mm | Ø82mm | IP65 | Recessed | Aluminium | White | ILAR-02468 |
| | | | | | Black | ILAR-02585 |

### ROUND



| Size | Cut-out | IP | Installation | Body Material | Housing Colour | SKU |
|---|---|---|---|---|---|---|
| Ø83x25mm | Ø65mm | IP65 | Recessed | Aluminium | White | ILAR-00196 |

FIXED IP20

### MACH SQUARE V2



| Model | Size | Cut-out | IP | Installation | Body Material | Housing Colour | SKU |
|---|---|---|---|---|---|---|---|
| Simple | 88x88x26mm | 75mm | IP20 | Recessed | Aluminium | White | ILAR-02456 |
| | | | | | | Black | ILAR-02457 |
| Double | 168x88x26mm | 160x75mm | IP20 | Recessed | Aluminium | White | ILAR-02458 |
| | | | | | | Black | ILAR-02459 |
| Triple | 248x88x26mm | 240x75mm | IP20 | Recessed | Aluminium | White | ILAR-02461 |
| | | | | | | Black | ILAR-02460 |

### MACH ROUND V2



| Size | Cut-out | IP | Installation | Body Material | Housing Colour | SKU |
|---|---|---|---|---|---|---|
| Ø86x26mm | Ø75mm | IP20 | Recessed | Aluminium | White | ILAR-02462 |
| | | | | | Black | ILAR-02463 |

### MACH SQUARE



| Size | Cut-out | IP | Installation | Body Material | Housing Colour | SKU |
|---|---|---|---|---|---|---|
| 81x81mm | 72x72mm | IP20 | Recessed | Aluminium | White | ILAR-00898 |
| | | | | | Black | ILAR-01018 |

FIXED IP20

## MACH ROUND



| Size | Cut-out | IP | Installation | Body Material | Housing Colour | SKU |
|---|---|---|---|---|---|---|
| Ø82x35mm | Ø72mm | IP20 | Recessed | Aluminium | White | ILAR-00897 |
| | | | | | Black | ILAR-01017 |

## ROUND



| Size | Cut-out | IP | Installation | Body Material | Housing Colour | SKU |
|---|---|---|---|---|---|---|
| Ø78x25mm | Ø62mm | IP20 | Recessed | Aluminium | White | ILAR-00115 |
| | | | | | Black | ILAR-01016 |
| | | | | | Brushed Steel | ILAR-00114 |

## SQUARE



| Size | Cut-out | IP | Installation | Body Material | Housing Colour | SKU |
|---|---|---|---|---|---|---|
| 75x75mm | 62mm | IP20 | Recessed | Aluminium | White | ILAR-01019 |
| | | | | | Black | ILAR-01020 |

## MACH ROUND TRIMLESS



| Size | Cut-out | IP | Installation | Body Material | Housing Colour | SKU |
|---|---|---|---|---|---|---|
| Ø125mm | Ø85mm | IP20 | Recessed | Aluminium | White | ILAR-02466 |

## HALE



| Size | Cut-out | IP | Installation | Body Material | Housing Colour | SKU |
|---|---|---|---|---|---|---|
| Ø86x26mm | Ø75mm | IP20 | Recessed | Aluminium | White | ILAR-02464 |





ROTABLES IP20

## MACH SQUARE



| Size | Cut-out | IP | Installation | Body Material | Housing Colour | SKU |
|---|---|---|---|---|---|---|
| 93x93mm | Ø83mm | IP20 | Recessed | Aluminium | White | ILAR-02469 |
| | | | | | Black | ILAR-02470 |

## MACH ROUND



| Size | Cut-out | IP | Installation | Body Material | Housing Colour | SKU |
|---|---|---|---|---|---|---|
| Ø93x42mm | Ø83mm | IP20 | Recessed | Aluminium | White | ILAR-01666 |
| | | | | | Black | ILAR-01667 |

## SQUARE



| Size | Cut-out | IP | Installation | Body Material | Housing Colour | SKU |
|---|---|---|---|---|---|---|
| 83x83mm | 72mm | IP20 | Recessed | Aluminium | White | ILAR-00194 |

## ROUND



| Size | Cut-out | IP | Installation | Body Material | Housing Colour | SKU |
|---|---|---|---|---|---|---|
| Ø78x25mm | Ø62mm | IP20 | Recessed | Aluminium | Brushed Steel | ILAR-00191 |
| Ø78x25mm | Ø62mm | | | | White | ILAR-00192 |
| Ø83mm | Ø72mm | | | | White | ILAR-02465 |

## ACCESSORIES GU10

| | | IP | SKU |
|---|---|---|---|
|  | Suporte Cerâmico | IP20 | ILAR-00449 |
|  | Suporte Cerâmico com Distanciador | IP20 | ILAR-00450 |
|  | Suporte Cerâmico com Conector Rápido Isolado | IP20 | ILAR-02553 |

## CONNECTORS

| | | IP | SKU |
|---|---|---|---|
|  | Ligador Rigid 2D | IP20 | ILAR-02925 |
|  | Ligador Rigid 3D | IP20 | ILAR-02926 |
|  | Ligador Rigid 4D | IP20 | ILAR-02927 |
|  | Ligador Rigid 6D | IP20 | ILAR-02928 |
|  | Ligador Rigid 8D | IP20 | ILAR-02929 |
|  | Ligador FLEX 2D PRO | IP20 | ILAR-02930 |
|  | Ligador FLEX 3D PRO | IP20 | ILAR-02931 |
|  | Ligador FLEX 5D PRO | IP20 | ILAR-02932 |
|  | Ligador FLEX INLINE 2D PRO | IP20 | ILAR-02933 |
|  | Ligador FLEX INLINE 3D PRO | IP20 | ILAR-02934 |
|  | Base Flat INLINE 3D PRO Calha DIM | IP20 | ILAR-02935 |



## ACCESSORIES IP68

| | | Housing Colour | Body Material | IP | SKU |
|---|---|---|---|---|---|
|  | Ligador Simples 0.5-1.5mm M16 - 3P | Black | Plastic | IP68 | ILAR-01118 |
|  | Ligador Simples  0.5-2.5mm M20 - 3P | Black | Plastic | IP68 | ILAR-01119 |
|  | Ligador em “ T” 0.5-2.5mm M20 - 3P | Black | Plastic | IP68 | ILAR-01120 |
|  | Caixa Derivação Estanque 1 Derivação | Black | Plastic | IP68 | ILAR-01121 |
|  | Caixa Derivação Estanque 2 Derivações | Black | Plastic | IP68 | ILAR-01122 |
|  | Caixa Derivação Estanque 4 Derivações | Black | Plastic | IP68 | ILAR-01123 |

# LAMPS

TUBES I LAMPS I MODULES

ALL LIGHTING SOLUTIONS

## GU10 120°



| Voltage | Body Material | Beam Angle | IP |
|---|---|---|---|
| 220-240V | Aluminium/PVC | 120° | IP20 |

| Model | Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | SKU |
|---|---|---|---|---|---|
| GU10 | 3W | 3000K | 340lm | Ø50x55mm | ILAR-00380 |
| | | 4000K | 360lm | | ILAR-00381 |
| | | 6500K | 360lm | | ILAR-00382 |
| | 5W | 3000K | 420lm | Ø50x55mm | ILAR-00321 |
| | | 4000K | 450lm | | ILAR-00322 |
| | | 6500K | 450lm | | ILAR-00323 |
| | 7W | 3000K | 600lm | Ø50x55mm | ILAR-00324 |
| | | 4000K | 630lm | | ILAR-00326 |
| | | 6500K | 630lm | | ILAR-00327 |
| GU10 Power | 10W | 3000K | 1000lm | Ø50x55mm | ILAR-02309 |
| | | 4000K | 1000lm | | ILAR-02310 |
| | | 6500K | 1000lm | | ILAR-02311 |

## GU10 38°



| Voltage | Body Material | Beam Angle | IP |
|---|---|---|---|
| 220-240V | Aluminium/PVC | 38° | IP20 |

| Model | Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | SKU |
|---|---|---|---|---|---|
| GU10 | 6W | 3000K | 530lm | Ø50x55mm | ILAR-00550 |
| | | 4000K | 540lm | | ILAR-00551 |
| | | 6500K | 540lm | | ILAR-00552 |

## GU10 DIMMABLE



| Voltage | Body Material | Beam Angle | IP |
|---|---|---|---|
| 220-240V | Aluminium/PVC | 45°/60° | IP20 |

| Model | Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | SKU |
|---|---|---|---|---|---|
| GU10 45° | 7W | 2700K | 630lm | Ø50x55mm | ILAR-00930 |
| GU10 45° | | 4000K | 630lm | | ILAR-00931 |
| GU10 60° | | 2700K | 630lm | | ILAR-02474 |
| GU10 60° | | 3000K | 630lm | | ILAR-02907 |
| GU10 60° | | 4000K | 630lm | | ILAR-02475 |

## MODULE



| Voltage | Body Material | Beam Angle | IP |
|---|---|---|---|
| 220-240V | Aluminium/PVC | 120° | IP20 |

| Model | Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | SKU |
|---|---|---|---|---|---|
| Module | 8W | 3000K | 680lm | Ø40x45mm | ILAR-00553 |
| | | 4000K | 690lm | | ILAR-00554 |
| | | 6500K | 700lm | | ILAR-00555 |

## MODULE DIMMABLE



| Voltage | Body Material | Beam Angle | IP |
|---|---|---|---|
| 220-240V | Aluminium/PVC | 120° | IP20 |

| Model | Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | SKU |
|---|---|---|---|---|---|
| Dimmable | 6W | 3CCT 3000K-4000K-6500K | 550lm | Ø40x45mm | ILAR-03567 |

## G4 / G9



| Voltage | Body Material | Beam Angle | IP |
|---|---|---|---|
| G4 - 12V<br>G9 - 220-240V | Aluminium/PVC | 200° | IP20 |

| Model | Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | SKU |
|---|---|---|---|---|---|
| G4 | 1.5W | 3000K | 120lm | 12x37mm | ILAR-00229 |
| | | 4000K | 130lm | | ILAR-00230 |
| | | 6000K | 140lm | | ILAR-00231 |
| G4 | 2W | 3000K | 160lm | 16x44mm | - |
| | | 4000K | | | ILAR-00933 |
| | | 6000K | | | ILAR-01065 |
| G9 | 2.5W | 3000K | 200lm | 16x48mm | ILAR-00226 |
| | | 4000K | 210lm | | ILAR-00227 |
| | | 6000K | 220lm | | ILAR-00228 |

## CANDLE



| Voltage | Body Material | Beam Angle | IP |
|---|---|---|---|
| 220-240V | Aluminium/Glass | 330° | IP20 |

| Model | Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | SKU |
|---|---|---|---|---|---|
| Crystal | 2W | 2700K | 200lm | 38x98mm | ILAR-01755 |
| Crystal | 4W | 2700K | 400lm | 38x98mm | ILAR-01756 |
| Crystal | 4W | 3000K | 470lm | 38x98mm | ILAR-00153 |
| Milk | 4W | 3000K | 470lm | 38x98mm | ILAR-00325 |
| Flame | 4W | 3000K | 470lm | 35x120mm | ILAR-00159 |
| Crystal | 6W | 1800K | 590lm | 38x98mm | ILAR-02481 |
| | | 2200K | 600lm | | ILAR-02482 |

## G45



| Voltage | Body Material | Beam Angle | IP |
|---|---|---|---|
| 220-240V | Aluminium/Glass | 330° | IP20 |

| Model | Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | SKU |
|---|---|---|---|---|---|
| E14 | 4W | 2700K | 470lm | Ø45x78mm | ILAR-02483 |
| | | 3000K | | | ILAR-00156 |
| E27 | 4W | 2700K | 470lm | 45x78mm | ILAR-02484 |
| | | 3000K | | | ILAR-00157 |

## A60



| Voltage | Body Material | Beam Angle | IP |
|---|---|---|---|
| 220-240V | Aluminium/Glass | 330° | IP20 |

| Model | Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | SKU |
|---|---|---|---|---|---|
| Dimmable | 6W | 2700K | 720lm | O60x105mm | ILAR-01757 |
| | 10W | 1800K | 1005lm | | ILAR-02485 |
| | 10W | 2200K | 1010lm | | ILAR-02486 |
| Crystal | 4W | 3000K | 470lm | | ILAR-00141 |
| | 6W | 3000K | 720lm | | ILAR-00144 |
| | 8W | 3000K | 880lm | | ILAR-00147 |
| Milk | 8W | 2700K | 795lm | | ILAR-02487 |
| | 8W | 3000K | 806lm | | ILAR-00150 |
| | 8W | 4000K | 840lm | | ILAR-00529 |
| | 8W | 6500K | 840lm | | ILAR-00530 |



## A60 SMOKY



| Voltage | Body Material | Beam Angle | IP |
|---|---|---|---|
| 220-240V | Aluminium/Glass | 330° | IP20 |

| Model | Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | SKU |
|---|---|---|---|---|---|
| Smoky | 3.4W | 1800K | 100lm | Ø60x108mm | ILAR-02497 |

## A60 GOLD/SILVER



| Voltage | Body Material | Beam Angle | IP |
|---|---|---|---|
| 220-240V | Aluminium/Glass | 330° | IP20 |

| Model | Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | SKU |
|---|---|---|---|---|---|
| Gold | 4W | 2200K | 320lm | Ø60x108mm | ILAR-02488 |
| | | 3000K | 380lm | | ILAR-00737 |
| Silver | 4W | 2200K | 320lm | | ILAR-02489 |
| | | 3000K | 380lm | | ILAR-00736 |

## A100



| Voltage | Body Material | Beam Angle | IP |
|---|---|---|---|
| 220-240V | Aluminium/Glass | 330° | IP20 |

| Model | Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | SKU |
|---|---|---|---|---|---|
| A100 | 4W | 2200K | 300lm | Ø100x175mm | ILAR-00741 |

## G95 GLOBO



| Voltage | Body Material | Beam Angle | IP |
|---|---|---|---|
| 220-240V | Aluminium/Glass | 330° | IP20 |

| Model | Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | SKU |
|---|---|---|---|---|---|
| Crystal | 8W | 2200K | 830lm | Ø95x136mm | ILAR-02491 |
| Crystal | 8W | 3000K | 880lm | | ILAR-00162 |

## G95 GLOBO GOLD/SILVER



| Voltage | Body Material | Beam Angle | IP |
|---|---|---|---|
| 220-240V | Aluminium/Glass | 330° | IP20 |

| Model | Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | SKU |
|---|---|---|---|---|---|
| Silver | 6W | 2200K | 510lm | Ø95x136mm | ILAR-02492 |
| Silver | 6W | 3000K | 540lm | | ILAR-00738 |
| Gold | 6W | 2200K | 510lm | | ILAR-02493 |
| Gold | 6W | 3000K | 540lm | | ILAR-00739 |

## G125 CRISTAL / AMBER



| Voltage | Body Material | Beam Angle | IP |
|---|---|---|---|
| 220-240V | Aluminium/Glass | 330° | IP20 |

| Model | Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | SKU |
|---|---|---|---|---|---|
| Crystal | 8W | 2200K | 840lm | Ø125x175mm | ILAR-02494 |
| Crystal | 8W | 3000K | 880lm | | ILAR-00165 |
| Amber | 6W | 3000K | 600lm | | ILAR-00740 |

## ST64



| Voltage | Body Material | Beam Angle | IP |
|---|---|---|---|
| 220-240V | Aluminium/Glass | 330° | IP20 |

| Model | Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | SKU |
|---|---|---|---|---|---|
| Crystal | 4W | 3000K | 440lm | Ø64x142mm | ILAR-00169 |
| Crystal | 6W | 3000K | 650lm | | ILAR-00168 |
| Amber | 6W | 2200K | 560lm | | ILAR-02490 |
| Amber | 6W | 3000K | 600lm | | ILAR-00171 |

## ST64 DECO



| Voltage | Body Material | Beam Angle | IP |
|---|---|---|---|
| 220-240V | Aluminium/Glass | 330° | IP20 |

| Model | Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | SKU |
|---|---|---|---|---|---|
| Amber | 6.5W | 2200K | 300lm | Ø100x175mm | ILAR-02496 |

## G125 DECO DIMMABLE



| Voltage | Body Material | Beam Angle | IP |
|---|---|---|---|
| 220-240V | Aluminium/Glass | 330° | IP20 |

| Model | Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | SKU |
|---|---|---|---|---|---|
| Amber | 7W | 2200K | 600lm | Ø125x175mm | ILAR-02501 |

## G125 CRYSTAL DIMMABLE



| Voltage | Body Material | Beam Angle | IP |
|---|---|---|---|
| 220-240V | Aluminium/Glass | 330° | IP20 |

| Model | Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | SKU |
|---|---|---|---|---|---|
| Crystal | 2.4W | 2200K | 150lm | Ø125x175mm | ILAR-02495 |



## DECO DIMMABLE



| Voltage | Body Material | Beam Angle | IP |
|---|---|---|---|
| 220-240V | Aluminium/Glass | 330° | IP20 |

| Model | Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | SKU |
|---|---|---|---|---|---|
| Amber | 4.8W | 2200K | 400lm | Ø170x270mm | ILAR-02498 |

## G95 SMOKY DIMMABLE



| Voltage | Body Material | Beam Angle | IP |
|---|---|---|---|
| 220-240V | Aluminium/Glass | 330° | IP20 |

| Model | Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | SKU |
|---|---|---|---|---|---|
| Smoky | 2.2W | 2200K | 60lm | Ø95x140mm | ILAR-02499 |

## E14 CLASSIC



| Voltage | Body Material | Beam Angle | IP |
|---|---|---|---|
| 220-240V | Aluminium/PVC | 180° | IP20 |

| Model | Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | SKU |
|---|---|---|---|---|---|
| Classic | 4W | 3000K | 340lm | 37x100mm | ILAR-00310 |
| | | 4000K | 350lm | | ILAR-00311 |
| | | 6500K | 360lm | | ILAR-00312 |
| Classic | 6W | 3000K | 520lm | 37x100mm | ILAR-00413 |
| | | 4000K | 530lm | | ILAR-00414 |
| | | 6500K | 540lm | | ILAR-00415 |
| Dimmable | 6W | 2700K | 500lm | 37x100mm | ILAR-02476 |
| | | 4000K | 530lm | | ILAR-02477 |

## G45 CLASSIC



| Voltage | Body Material | Beam Angle | IP |
|---|---|---|---|
| 220-240V | Aluminium/PVC | 220° | IP20 |

| Model | Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | SKU |
|---|---|---|---|---|---|
| E14 | 4W | 3000K | 320lm | Ø45x78mm | ILAR-00374 |
| | | 4000K | 330lm | | ILAR-00375 |
| | | 6500K | 340lm | | ILAR-00376 |
| | 6W | 3000K | 520lm | Ø45x78mm | ILAR-00435 |
| | | 4000K | 530lm | | ILAR-00436 |
| | | 6500K | 540lm | | ILAR-00437 |
| E27 | 4W | 3000K | 340lm | Ø45x78mm | ILAR-00368 |
| | | 4000K | 360lm | | ILAR-00369 |
| | | 6500K | 360lm | | ILAR-00370 |
| | 6W | 3000K | 520lm | Ø45x78mm | ILAR-00371 |
| | | 4000K | 530lm | | ILAR-00372 |
| | | 6500K | 540lm | | ILAR-00373 |

## E27 CLASSIC



| Voltage | Body Material | Beam Angle | IP |
|---|---|---|---|
| 220-240V | Aluminium/PVC | 220° | IP20 |

| Model | Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | SKU |
|---|---|---|---|---|---|
| Classic | 7W | 3000K | 610lm | 60x108mm | ILAR-00401 |
| | | 4000K | 620lm | 60x108mm | ILAR-00402 |
| | | 6500K | 630lm | 60x108mm | ILAR-00403 |
| Classic | 10W | 3000K | 850lm | 60x108mm | ILAR-00404 |
| | | 4000K | 850lm | 60x108mm | ILAR-00405 |
| | | 6500K | 850lm | 60x108mm | ILAR-00406 |
| Classic | 12W | 3000K | 1050lm | 60x118mm | ILAR-00407 |
| | | 4000K | 1100lm | 60x118mm | ILAR-00408 |
| | | 6500K | 1150lm | 60x118mm | ILAR-00409 |
| Dimmable | 12W | 2700K | 1050lm | 60x118mm | ILAR-02478 |
| | | 4000K | 1100lm | 60x118mm | ILAR-02479 |
| | | 6500K | 1150lm | 60x118mm | ILAR-02480 |
| Classic | 15W | 3000K | 1200lm | 60x118mm | ILAR-00410 |
| | | 4000K | 1300lm | 60x118mm | ILAR-00411 |
| | | 6500K | 1400lm | 60x118mm | ILAR-00412 |
| Classic | 20W | 3000K | 1850lm | 60x118mm | ILAR-00477 |
| | | 4000K | 1850lm | Ø70x138mm | ILAR-00478 |
| | | 6500K | 1900lm | Ø70x138mm | ILAR-00479 |
| Classic | 25W | 3000K | 2150lm | Ø80x163mm | ILAR-00480 |
| | | 4000K | 2175lm | Ø80x163mm | ILAR-00481 |
| | | 6500K | 2200lm | Ø80x163mm | ILAR-00482 |

## GLOBO A120



| Voltage | Body Material | Beam Angle | IP |
|---|---|---|---|
| 220-240V | Aluminium/PVC | 200° | IP20 |

| Model | Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | SKU |
|---|---|---|---|---|---|
| Classic | 18W | 3000K | 1580lm | Ø120x151mm | ILAR-00377 |
| | | 4000K | 1650lm | | ILAR-00378 |
| | | 6500K | 1735lm | | ILAR-00379 |

## BIG



| Voltage | Body Material | Beam Angle | IP |
|---|---|---|---|
| 220-240V | Aluminium/PVC | 220° | IP20 |

| Model | Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | SKU |
|---|---|---|---|---|---|
| Big | 30W | 4000K | 3000lm | Ø100x149.6mm | ILAR-01049 |
| | 40W | 4000K | 3600lm | Ø115x163.6mm | ILAR-00883 |



## SUPER ARON



| Voltage | Body Material | Beam Angle | IP | Base |
|---|---|---|---|---|
| 220-240V | Aluminium/PVC | 120° | IP20 | E40 |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Housing Colour | SKU |
|---|---|---|---|---|---|
| 100W | 6500K | 12500lm | Ø190x275mm | White | ILAR-02957 |
| 140W | | 17500lm | Ø230x306mm | | ILAR-02958 |

**Options (Not included)**



Reflector D40
ILAR-00203



Reflector D44
ILAR-00473

## VERSUS



| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 100-240V | Magnesium Alloy AL+PC | 90° - 150° | IP65 | Screw |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | Housing Colour | SKU |
|---|---|---|---|---|---|
| 54W / E27 | 4000K | 7000lm | 297x138x87mm | Black | ILAR-00749 |
| 54W / E40 | | 7000lm | | | ILAR-00549 |
| 75W | | 9800lm | | | ILAR-00547 |
| 95W-75W-63W Switch Power | 4000K | 12400lm | | | ILAR-01934 |

## KORN



| Voltage | Body Material | Beam Angle | IP | Mounting Type |
|---|---|---|---|---|
| 100-240VAC | Aluminum | 60°x110° | IP64 | Screw |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Base | Housing Colour | Size | SKU |
|---|---|---|---|---|---|---|
| 20W | 4000K | 2600lm | E27 | White | Ø55x260mm | ILAR-02557 |
| 20W | 5000K | 2600lm | E27 | | | ILAR-00843 |
| 30W | 4000K | 3900lm | E27 | | Ø95x260mm | ILAR-02558 |
| 30W | 5000K | 3900lm | E27 | | | ILAR-00794 |
| 40W | 4000K | 5200lm | E27 | | | ILAR-02559 |
| 40W | 5000K | 5200lm | E27 | | | ILAR-00751 |
| 40W | 4000K | 5200lm | E40 | | | ILAR-02560 |
| 40W | 5000K | 5200lm | E40 | | | ILAR-00546 |
| 54W | 4000K | 7020lm | E40 | | | ILAR-02561 |
| 54W | 5000K | 7020lm | E40 | | | ILAR-00932 |
| 80W | 4000K | 10400lm | E40 | | | ILAR-02562 |
| 80W | 5000K | 10400lm | E40 | | | ILAR-00934 |
| 100W | 4000K | 13000lm | E40 | | Ø125x285mm | ILAR-02563 |
| 100W | 5000K | 13000lm | E40 | | | ILAR-00608 |

**Options (Not included)**



Adaptador E27 para E40
ILDV-00306



Adaptador E40 para E27
ILDV-00307

## T8 3CCT 120LM/W 1 SIDE




| Voltage | Body Material | Beam Angle | IP |
|---|---|---|---|
| 180-265V | Glass | 320° | IP20 |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | SKU |
|---|---|---|---|---|
| 9W | 3CCT 3000K-4000K-6500K | 1080lm | 600mm | ILAR-03564 |
| 18W | 3CCT 3000K-4000K-6500K | 2160lm | 1200mm | ILAR-03565 |
| 22W | 3CCT 3000K-4000K-6500K | 2640lm | 1500mm | ILAR-03566 |

## T8 TECNIC PRO 130LM/W 1 SIDE




| Voltage | Body Material | Beam Angle | IP | PF |
|---|---|---|---|---|
| 85-265V | Glass | 320° | IP20 | PF0.9 |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | SKU |
|---|---|---|---|---|
| 9W | 4000K | 1170lm | 600mm | ILAR-00498 |
| | 6500K | | | ILAR-00499 |
| 18W | 4000K | 2340lm | 1200mm | ILAR-00501 |
| | 6500K | | | ILAR-00502 |
| 22W | 4000K | 2860lm | 1500mm | ILAR-00504 |
| | 6500K | | | ILAR-00505 |

## T8 EVO 160LM/W 1 SIDE




| Voltage | Body Material | Beam Angle | IP | PF |
|---|---|---|---|---|
| 180-265V | Glass | 320° | IP20 | PF0.5 |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | SKU |
|---|---|---|---|---|
| 9W | 4000K | 1440lm | 600mm | ILAR-03760 |
| | 6500K | | | ILAR-03761 |
| 18W | 4000K | 2880lm | 1200mm | ILAR-03762 |
| | 6500K | | | ILAR-03763 |
| 22W | 4000K | 3520lm | 1500mm | ILAR-03764 |
| | 6500K | | | ILAR-03765 |

## T8 HIGH-LUMEN 180LM/W 1 SIDE




| Voltage | Body Material | Beam Angle | IP | PF |
|---|---|---|---|---|
| 85-265V | Glass | 320° | IP20 | PF0.9 |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | SKU |
|---|---|---|---|---|
| 7W | 4000K | 1260lm | 600mm | ILAR-00863 |
| | 6500K | | | ILAR-01089 |
| 14W | 4000K | 2520lm | 1200mm | ILAR-00864 |
| | 6500K | | | ILAR-00865 |
| 21W | 4000K | 3780lm | 1500mm | ILAR-00867 |
| | 6500K | | | ILAR-00868 |



## T8 STANDARD 2 SIDES




| Voltage | Body Material | Beam Angle | IP |
|---|---|---|---|
| 180-265V | Glass | 320° | IP20 |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | SKU |
|---|---|---|---|---|
| 9W | 4000K | 990lm | 600mm | LAR-00281 |
| | 6500K | | | ILAR-00282 |
| 18W | 4000K | 1980lm | 1200mm | ILAR-00284 |
| | 6500K | | | ILAR-00285 |
| 22W | 4000K | 2420lm | 1500mm | ILAR-00287 |
| | 6500K | | | ILAR-00288 |

## T8 STANDARD 1 SIDE




| Voltage | Body Material | Beam Angle | IP |
|---|---|---|---|
| 180-265V | Glass | 320° | IP20 |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | SKU |
|---|---|---|---|---|
| 9W | 3000K | 990lm | 600mm | ILAR-00289 |
| | 4000K | | | ILAR-00290 |
| | 6500K | | | ILAR-00291 |
| 12W | 4000K | 1320lm | 900mm | ILAR-02025 |
| | 6500K | | | ILAR-02026 |
| 18W | 3000K | 1980lm | 1200mm | ILAR-00292 |
| | 4000K | | | ILAR-00293 |
| | 6500K | | | ILAR-00294 |
| 22W | 3000K | 2420lm | 1500mm | ILAR-00295 |
| | 4000K | | | ILAR-00296 |
| | 6500K | | | ILAR-00297 |

## T5 STANDARD 2 SIDES




| Voltage | Body Material | Beam Angle | IP |
|---|---|---|---|
| 180-265V | Glass | 320° | IP20 |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Size | SKU |
|---|---|---|---|---|
| 9W | 4000K | 990lm | 600mm | ILAR-00485 |
| | 6500K | | | ILAR-00486 |
| 18W | 4000K | 1980lm | 115cm | ILAR-00488 |
| | 4500K | 2700lm (150lm/W) | | ILAR-01244 |
| | 6000K | 1980lm | | ILAR-00489 |
| 20W | 4000K | 3000lm (150lm/W) | 150cm | ILAR-01187 |
| | 6500K | 2200lm | | ILAR-00487 |

306–353



# LED STRIP

230V / SMD / COB

ALL LIGHTING SOLUTIONS

## SLIMSTRIP 230V






| Voltage | Beam Angle | IP | Mounting Type |
|---|---|---|---|
| 230V | 120° | IP65 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Roll | Size | SKU |
|---|---|---|---|---|---|
| 12W | 3000K | 1200lm/m | 25m | 10.5x4.5mm | ILAR-03021 |
| | 4000K | 1200lm/m | 25m | 10.5x4.5mm | ILAR-03023 |
| | 6500K | 1200lm/m | 25m | 10.5x4.5mm | ILAR-03024 |
| 12W | 3000K | 1200lm/m | 50m | 10.5x4.5mm | ILAR-03025 |
| | 4000K | 1200lm/m | 50m | 10.5x4.5mm | ILAR-03026 |
| | 6500K | 1200lm/m | 50m | 10.5x4.5mm | ILAR-03027 |

**Options (Not included)**



End Cap
ILAR-03028



Middle Connector
ILAR-03029



Fixation Clip
ILAR-03030



Power Feed Plug
ILAR-03031



L Connector
ILAR-03518

## PROSTRIP 230V IP65






| Voltage | Beam Angle | IP | Mounting Type |
|---|---|---|---|
| 230V | 120° | IP65 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Roll | Width | SKU |
|---|---|---|---|---|---|
| 15W | 3000K | 1700lm/m | 50m | 12mm | ILAR-01407 |
| | 4000K | | 50m | | ILAR-01408 |
| | 6000K | | 50m | | ILAR-01409 |

**Options (Not included)**



Power Feed
ILAR-01421



Joint Connector
ILAR-01422



Power Feed Plug
ILAR-01542



## PROJECT STRIP 230V






| Voltage | Beam Angle | IP | Mounting Type |
|---|---|---|---|
| 230V | 120° | IP65 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Roll | Width | SKU |
|---|---|---|---|---|---|
| 15W | 2700K | 1500lm/m | 100m | 12x4mm | ILAR-02765 |
| | 3000K | | 100m | | ILAR-01925 |
| | 4000K | | 100m | | ILAR-01926 |
| | 6000K | | 100m | | ILAR-01927 |

**Options (Not included)**



End Cap
ILAR-01928




End Cap with Neck
ILAR-01929



Profile Terminal Block Set
ILAR-01930

## COB 230V






| Voltage | Beam Angle | IP | Mounting Type |
|---|---|---|---|
| 230V | 120° | IP67 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Roll | Width | SKU |
|---|---|---|---|---|---|
| 15W | 2700K | 1200lm/m | 50m | 10mm | ILAR-03253 |
| | 3000K | | 50m | | ILAR-03254 |
| | 4000K | | 50m | | ILAR-03255 |
| | 6000K | | 50m | | ILAR-03256 |

**Options (Not included)**



Power Feed Plug
ILAR-03257



Power Feed
ILAR-03258



Connector
ILAR-03259



Mounting Clip
ILAR-03260



End Cap
ILAR-03261

# LED STRIP

## 24V

**ALL LIGHTING SOLUTIONS**

## STANDARD SMD 24V









| Voltage | Beam Angle | IP | Mounting Type |
|---|---|---|---|
| 24V | 120° | IP20 / IP65 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Roll | Width | IP | SKU |
|---|---|---|---|---|---|---|
| 4.8W | 2700K | 408lm/m | 5m | 8mm | IP20 | ILAR-03158 |
| | 3000K | 408lm/m | | | IP20 | ILAR-03159 |
| | 4000K | 437lm/m | | | IP20 | ILAR-03160 |
| | 6000K | 437lm/m | | | IP20 | ILAR-03161 |
| | 2700K | 408lm/m | | | IP65 | ILAR-03162 |
| | 3000K | 408lm/m | | | IP65 | ILAR-03163 |
| | 4000K | 437lm/m | | | IP65 | ILAR-03164 |
| | 6000K | 437lm/m | | | IP65 | ILAR-03165 |
| 9.6W | 2700K | 816lm/m | 5m | 8mm | IP20 | ILAR-03166 |
| | 3000K | 816lm/m | | | IP20 | ILAR-03167 |
| | 4000K | 874lm/m | | | IP20 | ILAR-03168 |
| | 6000K | 874lm/m | | | IP20 | ILAR-03169 |
| | 2700K | 816lm/m | | | IP65 | ILAR-03170 |
| | 3000K | 816lm/m | | | IP65 | ILAR-03171 |
| | 4000K | 874lm/m | | | IP65 | ILAR-03172 |
| | 6000K | 874lm/m | | | IP65 | ILAR-03173 |
| 12W | 2700K | 1080lm/m | 5m | 8mm | IP20 | ILAR-03174 |
| | 3000K | 1080lm/m | | | IP20 | ILAR-03175 |
| | 4000K | 1155lm/m | | | IP20 | ILAR-03176 |
| | 6000K | 1155lm/m | | | IP20 | ILAR-03177 |
| | 2700K | 1080lm/m | | | IP65 | ILAR-03178 |
| | 3000K | 1080lm/m | | | IP65 | ILAR-03179 |
| | 4000K | 1155lm/m | | | IP65 | ILAR-03180 |
| | 6000K | 1155lm/m | | | IP65 | ILAR-03181 |
| 14.4W | 2700K | 1267lm/m | 5m | 8mm | IP20 | ILAR-03182 |
| | 3000K | 1267lm/m | | | IP20 | ILAR-03183 |
| | 4000K | 1354lm/m | | | IP20 | ILAR-03184 |
| | 6000K | 1354lm/m | | | IP20 | ILAR-03185 |
| | 2700K | 1267lm/m | | | IP65 | ILAR-03186 |
| | 3000K | 1267lm/m | | | IP65 | ILAR-03187 |
| | 4000K | 1354lm/m | | | IP65 | ILAR-03188 |
| | 6000K | 1354lm/m | | | IP65 | ILAR-03189 |
| 19.2W | 2700K | 1700lm/m | 5m | 10mm | IP20 | ILAR-03190 |
| | 3000K | 1700lm/m | | | IP20 | ILAR-03191 |
| | 4000K | 1819lm/m | | | IP20 | ILAR-03192 |
| | 6000K | 1819lm/m | | | IP20 | ILAR-03193 |
| | 2700K | 1700lm/m | | | IP65 | ILAR-03194 |
| | 3000K | 1700lm/m | | | IP65 | ILAR-03195 |
| | 4000K | 1819lm/m | | | IP65 | ILAR-03196 |
| | 6000K | 1819lm/m | | | IP65 | ILAR-03197 |

**Options (Not included)**



Connector Single Color 9 in 1
8mm ILAR-03311
10mm ILAR-03319



Connector with Screw “T” and “L”
8mm ILAR-03312
10mm ILAR-03320



Connector with Screw
8mm ILAR-03313
10mm ILAR-03321



Connector with Screw Single Color
8mm ILAR-03314
10mm ILAR-03322



Connector “L” Single Color
8mm ILAR-03315
10mm ILAR-03323



Connector Single Color
8mm ILAR-03316
10mm ILAR-03324



Connector-Cable Single Color
8mm ILAR-03317
10mm ILAR-03325



Connector-Cable-Connector Single Color
8mm ILAR-03318
10mm ILAR-03326

## PROSTRIP SMD 24V






| Voltage | Beam Angle | IP | Mounting Type |
|---|---|---|---|
| 24V | 120° | IP20 / IP65 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Roll | Width | IP | SKU |
|---|---|---|---|---|---|---|
| 9.6W | 2700K | 716lm/m | 5m | 10mm | IP20 | ILAR-00632 |
| | 2700K | 716lm/m | 50m | 10mm | IP20 | ILAR-02673 |
| | 4000K | 780lm/m | 5m | | IP20 | ILAR-00633 |
| | 4000K | 780lm/m | 50m | 10mm | IP20 | ILAR-02671 |
| | 6500K | 847lm/m | 5m | | IP20 | ILAR-00634 |
| | 2700K | 644lm/m | 5m | | IP65 | ILAR-00635 |
| | 4000K | 702lm/m | 5m | | IP65 | ILAR-00636 |
| | 6500K | 762lm/m | 5m | | IP65 | ILAR-00637 |
| 14.4W | 2700K | 1040lm/m | 5m | 10mm | IP20 | ILAR-00620 |
| | 2700K | 1040lm/m | 50m | 10mm | IP20 | ILAR-02670 |
| | 4000K | 1130lm/m | 5m | | IP20 | ILAR-00621 |
| | 4000K | 1130lm/m | 50m | 10mm | IP20 | ILAR-02672 |
| | 6500K | 1212lm/m | 5m | | IP20 | ILAR-00622 |
| | 2700K | 936lm/m | 5m | | IP65 | ILAR-00623 |
| | 4000K | 1017lm/m | 5m | | IP65 | ILAR-00624 |
| | 6500K | 1091lm/m | 5m | | IP65 | ILAR-00625 |
| 19.2W | 2700K | 1565lm/m | 5m | 10mm | IP20 | ILAR-00626 |
| | 4000K | 1622lm/m | 5m | | IP20 | ILAR-00627 |
| | 6500K | 1776lm/m | 5m | | IP20 | ILAR-00628 |
| | 2700K | 1409lm/m | 5m | | IP65 | ILAR-00629 |
| | 4000K | 1460lm/m | 5m | | IP65 | ILAR-00630 |
| | 6500K | 1598lm/m | 5m | | IP65 | ILAR-00631 |

**Options (Not included)**



Double Connector 2 PIN
With Cable 15cm
10mm ILAR-00639



Double Connector
2 PIN
10mm ILAR-00640



Connector Single Color 9 in 1
10mm ILAR-03319



Connector with Screw “T” and “L”
10mm ILAR-03320



Connector with Screw
10mm ILAR-03321



Connector with Screw Single Color
10mm ILAR-03322



Connector “L” Single Color
10mm ILAR-03323



Connector Single Color
10mm ILAR-03324



Connector-Cable Single Color
10mm ILAR-03325



Connector-Cable-Connector Single Color
10mm ILAR-03326



## SUPER LONG PROSTRIP 20M 24V






| Voltage | Beam Angle | IP | Mounting Type |
|---|---|---|---|
| 24V | 120° | IP20 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Roll | Width | IP | SKU |
|---|---|---|---|---|---|---|
| 9.6W | 2700K | 864lm/m | 20m | 10mm | IP20 | ILAR-01411 |
| | 3000K | 960lm/m | | | | ILAR-03127 |
| | 4000K | 1008lm/m | | | | ILAR-01412 |
| | 6000K | 1056lm/m | | | | ILAR-01413 |

**Options (Not included)**



Connector Single Color 9 in 1
10mm ILAR-03319



Connector with Screw “T” and “L”
10mm ILAR-03320



Connector with Screw
10mm ILAR-03321



Connector with Screw Single Color
10mm ILAR-03322



Connector “L” Single Color
10mm ILAR-03323



Connector Single Color
10mm ILAR-03324



Connector-Cable Single Color
10mm ILAR-03325



Connector-Cable-Connector Single Color
10mm ILAR-03326



## HIGH LUMEN 24V






| Voltage | Beam Angle | IP | Mounting Type |
|---|---|---|---|
| 24V | 120° | IP20 / IP67 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Roll | Width | IP | SKU |
|---|---|---|---|---|---|---|
| 14.4W | 2500K | 2310lm/m | 5m | 8mm | IP20 | ILAR-03113 |
| | 2700K | 2310lm/m | | | | ILAR-03115 |
| | 3000K | 2310lm/m | | | | ILAR-03117 |
| | 4000K | 2310lm/m | | | | ILAR-03119 |
| | 6000K | 2310lm/m | | | | ILAR-03121 |
| 14.4W | 2500K | 2195lm/m | 5m | 10mm | IP67 | ILAR-03114 |
| | 2700K | 2195lm/m | | | | ILAR-03116 |
| | 3000K | 2195lm/m | | | | ILAR-03118 |
| | 4000K | 2195lm/m | | | | ILAR-03120 |
| | 6000K | 2195lm/m | | | | ILAR-03122 |
| 22W | 2500K | 3564lm/m | 5m | 10mm | IP20 | ILAR-03123 |
| | 2700K | 3564lm/m | | | | ILAR-03125 |
| | 3000K | 3564lm/m | | | | ILAR-01704 |
| | 4000K | 3564lm/m | | | | ILAR-01705 |
| | 6000K | 3564lm/m | | | | ILAR-01706 |
| 22W | 2500K | 3386lm/m | 5m | 12mm | IP67 | ILAR-03124 |
| | 2700K | 3386lm/m | | | | ILAR-03126 |
| | 3000K | 3386lm/m | | | | ILAR-01707 |
| | 4000K | 3386lm/m | | | | ILAR-01708 |
| | 6000K | 3386lm/m | | | | ILAR-01709 |

**Options (Not included)**



Connector-Cable-Connector
8mm IP20 ILAR-01965



Connector-Cable-Connector
12mm IP67 ILAR-01967



Connector Single Color 9 in 1
10mm ILAR-03319



Connector with Screw “T” and “L”
10mm ILAR-03320



Connector with Screw
10mm ILAR-03321



Connector with Screw Single Color
10mm ILAR-03322



Connector “L” Single Color
10mm ILAR-03323



Connector Single Color
10mm ILAR-03324



Connector-Cable Single Color
10mm ILAR-03325



Connector-Cable-Connector Single Color
10mm ILAR-03326



Double Connector 2 Pin
8mm ILAR-01416
10mm ILAR-01417



Connector IP67
12mm
ILAR-01961



Inicial Connector IP67
12mm
ILAR-01962



Connector IP67
10mm
ILAR-01966



Connector+Cable

ILAR-01969



## FREE CUT SMD 24V






| Voltage | Beam Angle | IP | Mounting Type |
|---|---|---|---|
| 24V | 120° | IP20 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Roll | Width | IP | SKU |
|---|---|---|---|---|---|---|
| 9.6W | 2700K | 1280lm/m | 5m | 8mm | IP20 | ILAR-03105 |
| | 3000K | 1325lm/m | | | | ILAR-03106 |
| | 4000K | 1360lm/m | | | | ILAR-03107 |
| | 6000K | 1360lm/m | | | | ILAR-03108 |
| 22W | 2700K | 2850lm/m | 5m | 10mm | IP20 | ILAR-03109 |
| | 3000K | 2950lm/m | | | | ILAR-03110 |
| | 4000K | 3035lm/m | | | | ILAR-03111 |
| | 6000K | 3035lm/m | | | | ILAR-03112 |

**Options (Not included)**



Connector Single Color 9 in 1
8mm ILAR-03311
10mm ILAR-03319



Connector with Screw “T” and “L”
8mm ILAR-03312
10mm ILAR-03320



Connector with Screw
8mm ILAR-03313
10mm ILAR-03321



Connector with Screw Single Color
8mm ILAR-03314
10mm ILAR-03322



Connector “L” Single Color
8mm ILAR-03315
10mm ILAR-03323




Connector Single Color
8mm ILAR-03316
10mm ILAR-03324



Connector-Cable Single Color
8mm ILAR-03317
10mm ILAR-03325



Connector-Cable-Connector Single Color
8mm ILAR-03318
10mm ILAR-03326

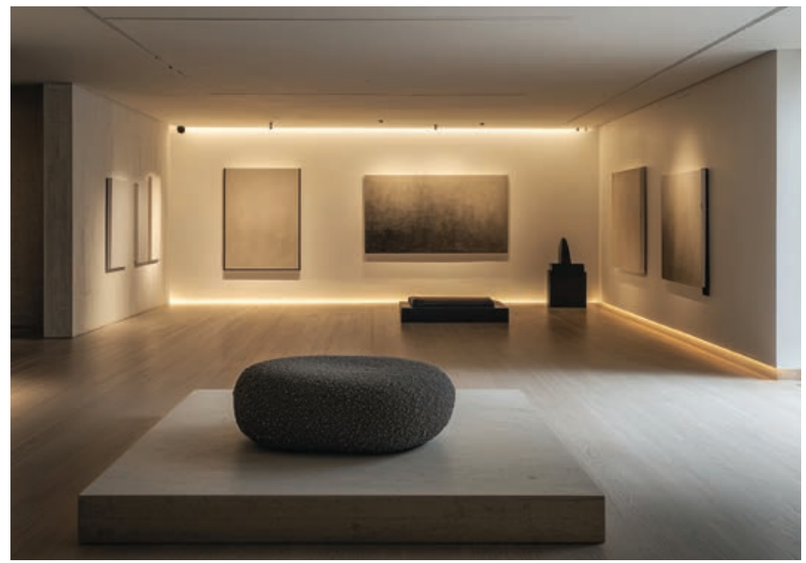

## SLIM SMD 24V






| Voltage | Beam Angle | IP | Mounting Type |
|---|---|---|---|
| 24V | 120° | IP20 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Roll | Width | IP | SKU |
|---|---|---|---|---|---|---|
| 4.8W | 2700K | 560lm/m | 5m | 4mm | IP20 | ILAR-03075 |
| | 3000K | 580lm/m | | | | ILAR-03076 |
| | 4000K | 600lm/m | | | | ILAR-03077 |
| | 6000K | 600lm/m | | | | ILAR-03078 |
| 9.6W | 2700K | 1140lm/m | 5m | 6mm | IP20 | ILAR-03079 |
| | 3000K | 1160lm/m | | | | ILAR-03080 |
| | 4000K | 1180lm/m | | | | ILAR-03081 |
| | 6000K | 1180lm/m | | | | ILAR-03082 |

**Options (Not included)**



Connector
6mm ILAR-03308




Connector-Cable Single Color
6mm ILAR-03309



Connector-Cable-Connector Single Color
6mm ILAR-03310

## LARGE SMD 24V







| Voltage | Beam Angle | IP | Mounting Type |
|---|---|---|---|
| 24V | 120° | IP20 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Roll | Width | IP | SKU |
|---|---|---|---|---|---|---|
| 25W | 2700K | 2625lm/m | 5m | 30mm | IP20 | ILAR-03206 |
| | 3000K | 2625lm/m | | | | ILAR-03207 |
| | 4000K | 2875lm/m | | | | ILAR-03208 |
| | 6000K | 2875lm/m | | | | ILAR-03209 |



## COB 24V






| Voltage | Beam Angle | IP | Mounting Type |
|---|---|---|---|
| 24V | 120° | IP20 / IP67 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Roll | Width | IP | SKU |
|---|---|---|---|---|---|---|
| 10W | 2700K | 950lm/m | 5m | 8mm | IP20 | ILAR-01393 |
| | 2700K | 950lm/m | 50m | | IP20 | ILAR-02662 |
| | 3000K | 1000lm/m | 5m | | IP20 | ILAR-02905 |
| | 4000K | 1000lm/m | 5m | | IP20 | ILAR-01394 |
| | 4000K | 1000lm/m | 50m | | IP20 | ILAR-02664 |
| | 6000K | 1050lm/m | 5m | | IP20 | ILAR-01395 |
| 10W | 2700K | 902lm/m | 5m | 10mm | IP67 | ILAR-01396 |
| | 3000K | 1000lm/m | 5m | | IP67 | ILAR-03519 |
| | 4000K | 950lm/m | 5m | | IP67 | ILAR-01397 |
| | 6000K | 998lm/m | 5m | | IP67 | ILAR-02509 |
| 15W | 2700K | 1380lm/m | 5m | 10mm | IP20 | ILAR-01401 |
| | 2700K | 1380lm/m | 50m | | IP20 | ILAR-02665 |
| | 3000K | 1500lm/m | 5m | | IP20 | ILAR-02908 |
| | 4000K | 1455lm/m | 5m | | IP20 | ILAR-01402 |
| | 4000K | 1455lm/m | 50m | | IP20 | ILAR-02666 |
| | 6000K | 1530lm/m | 5m | | IP20 | ILAR-01403 |
| 15W | 2700K | 1311lm/m | 5m | 12mm | IP67 | ILAR-01404 |
| | 3000K | 1000lm/m | 5m | | IP67 | ILAR-03131 |
| | 4000K | 1382lm/m | 5m | | IP67 | ILAR-01405 |
| | 6000K | 1453lm/m | 5m | | IP67 | ILAR-02508 |

**Options (Not included)**



Connector Single Color 9 in 1
8mm ILAR-03311
10mm ILAR-03319



Connector with Screw “T” and “L”
8mm ILAR-03312
10mm ILAR-03320



Connector with Screw
8mm ILAR-03313
10mm ILAR-03321



Connector with Screw Single Color
8mm ILAR-03314
10mm ILAR-03322



Connector “L” Single Color
8mm ILAR-03315
10mm ILAR-03323



Connector Single Color
8mm ILAR-03316
10mm ILAR-03324



Connector-Cable Single Color
8mm ILAR-03317
10mm ILAR-03325



Connector-Cable-Connector Single Color
8mm ILAR-03318
10mm ILAR-03326



Double Connector 2 Pin
8mm ILAR-01416
10mm ILAR-01417



Connector IP67
12mm
ILAR-01961



Inicial Connector IP67
12mm
ILAR-01962



Connector IP67
10mm
ILAR-01966



Connector+Cable


ILAR-01969




Connector-Cable-Connector
12mm IP67 ILAR-01967

## SCOB 24V






| Voltage | Beam Angle | IP | Mounting Type |
|---|---|---|---|
| 24V | 120° | IP20 / IP67 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Roll | Width | IP | SKU |
|---|---|---|---|---|---|---|
| 15W | 2700K | 1950lm/m | 5m | 10mm | IP20 | ILAR-03146 |
| | 3000K | 1950lm/m | 5m | | IP20 | ILAR-03147 |
| | 4000K | 1950lm/m | 5m | | IP20 | ILAR-03148 |
| | 6000K | 1950lm/m | 5m | | IP20 | ILAR-03149 |
| 15W | 2700K | 1950lm/m | 5m | 12mm | IP67 | ILAR-03150 |
| | 3000K | 1950lm/m | 5m | | IP67 | ILAR-03151 |
| | 4000K | 1950lm/m | 5m | | IP67 | ILAR-03152 |
| | 6000K | 1950lm/m | 5m | | IP67 | ILAR-03153 |

**Options (Not included)**



Connector-Cable-Connector
8mm IP20 ILAR-01965



Connector-Cable-Connector
12mm IP67 ILAR-01967



Connector Single Color 9 in 1
10mm ILAR-03319



Connector with Screw “T” and “L”
10mm ILAR-03320



Connector with Screw
10mm ILAR-03321



Connector with Screw Single Color
10mm ILAR-03322



Connector “L” Single Color
10mm ILAR-03323



Connector Single Color
10mm ILAR-03324



Connector-Cable Single Color
10mm ILAR-03325




Connector-Cable-Connector Single Color
10mm ILAR-03326





## FREE CUT COB 24V






| Voltage | Beam Angle | IP | Mounting Type |
|---|---|---|---|
| 24V | 120° | IP20 / IP65 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Roll | Width | IP | SKU |
|---|---|---|---|---|---|---|
| 13W | 2700K | 845lm/m | 5m | 8mm | IP20 | ILAR-03095 |
| | 3000K | 949lm/m | 5m | | IP20 | ILAR-03096 |
| | 4000K | 962lm/m | 5m | | IP20 | ILAR-03097 |
| | 6000K | 962lm/m | 5m | | IP20 | ILAR-03098 |
| 13W | 2700K | 760lm/m | 5m | 8mm | IP65 | ILAR-03099 |
| | 3000K | 854lm/m | 5m | | IP65 | ILAR-03100 |
| | 4000K | 865lm/m | 5m | | IP65 | ILAR-03101 |
| | 6000K | 865lm/m | 5m | | IP65 | ILAR-03102 |

**Options (Not included)**



Connector Single Color 9 in 1
8mm ILAR-03311



Connector with Screw “T” and “L”
8mm ILAR-03312



Connector with Screw
8mm ILAR-03313



Connector with Screw Single Color
8mm ILAR-03314



Connector “L” Single Color
8mm ILAR-03315



Connector Single Color
8mm ILAR-03316



Connector-Cable Single Color
8mm ILAR-03317



Connector-Cable-Connector Single Color
8mm ILAR-03318

## COB SLIM 24V









| Voltage | Beam Angle | IP | Mounting Type |
|---|---|---|---|
| 24V | 120° | IP20 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Roll | Width | IP | SKU |
|---|---|---|---|---|---|---|
| 7W | 2700K | 679lm/m | 2.5m | 3mm | IP20 | ILAR-03087 |
| | 3000K | 735lm/m | 2.5m | | | ILAR-03088 |
| | 4000K | 756lm/m | 2.5m | | | ILAR-03089 |
| | 6000K | 756lm/m | 2.5m | | | ILAR-03090 |
| 7W | 2700K | 721lm/m | 5m | 5mm | IP20 | ILAR-03091 |
| | 3000K | 721lm/m | 5m | | | ILAR-03092 |
| | 4000K | 740lm/m | 5m | | | ILAR-03093 |
| | 6000K | 740lm/m | 5m | | | ILAR-03094 |

**Options (Not included)**



Connector “L” Single Color
5mm ILAR-03528



Connector Single Color
5mm ILAR-03529



Connector-Cabo Single Color
5mm ILAR-03530



Connector-Cabo-Connector Single Color
5mm ILAR-03531

## COB LARGE 24V






| Voltage | Beam Angle | IP | Mounting Type |
|---|---|---|---|
| 24V | 120° | IP20 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Roll | Width | IP | SKU |
|---|---|---|---|---|---|---|
| 40W | 2700K | 3600lm | 5m | 30mm | IP20 | ILAR-03202 |
| | 3000K | 3800lm | | | | ILAR-03203 |
| | 4000K | 4160lm | | | | ILAR-03204 |
| | 6000K | 4160lm | | | | ILAR-03205 |

## SMD CCT CHANGE 24V






| Voltage | Beam Angle | IP | Mounting Type |
|---|---|---|---|
| 24V | 120° | IP20 / IP65 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Roll | Width | IP | SKU |
|---|---|---|---|---|---|---|
| 19W | 1800K-3000K | 800-900lm/m | 5m | 10mm | IP20 | ILAR-03103 |
| 19W | 1800K-3000K | 720-810lm/m | 5m | 10mm | IP65 | ILAR-03104 |

## CSP CCT TUNABLE 24V






| Voltage | Beam Angle | IP | Mounting Type |
|---|---|---|---|
| 24V | 120° | IP20 / IP67 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Roll | Width | IP | SKU |
|---|---|---|---|---|---|---|
| 19W | CCT 2700K-6000K | 1750lm/m | 5m | 10mm | IP20 | ILAR-01686 |
| 19W | CCT 2700K-6000K | 1750lm/m | 5m | 10mm | IP67 | ILAR-01687 |

**Options (Not included)**



Connector "L" CCT
10mm ILAR-03330



Connector CCT
10mm ILAR-03331



Connector-Cabo CCT
10mm ILAR-03332



Connector-Cabo-Connector CCT
10mm ILAR-03333



Connector CCT
10mm ILAR-01972



Connector-Cabo CCT
10mm ILAR-01973



Connector CCT IP67
10mm ILAR-01974



Connector-Cabo CCT IP67
10mm ILAR-01975



## PROSTRIP SMD RGB 24V






| Voltage | Beam Angle | IP | Mounting Type |
|---|---|---|---|
| 24V | 120° | IP20 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Roll | Width | IP | SKU |
|---|---|---|---|---|---|---|
| 14.4W | RGB | 500lm/m | 5m | 10mm | IP20 | ILAR-00638 |
| 14.4W | RGB | 500lm/m | 5m | 10mm | IP65 | ILAR-00831 |

**Options (Not included)**



Double Connector-Cabo
4 Pin RGB
10mm ILAR-00641



Double Connector
4 Pin RGB
10mm ILAR-00642



Connector
RGB
10mm ILAR-03487




Connector-Cabo
RGB
10mm ILAR-03488



Connector-Cabo-Connector
RGB
10mm ILAR-03489

## COB RGB 24V






| Voltage | Beam Angle | IP | Mounting Type |
|---|---|---|---|
| 24V | 120° | IP20 / IP67 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Roll | Width | IP | SKU |
|---|---|---|---|---|---|---|
| 20W | RGB | 750lm/m | 5m | 10mm | IP20 | ILAR-03136 |
| 20W | RGB | 750lm/m | 5m | 12mm | IP67 | ILAR-03137 |

**Options (Not included)**



Connector
RGB
10mm ILAR-03490



Connector-Cabo
RGB
10mm ILAR-03491



Connector-Cabo-Connector
RGB
10mm ILAR-03492

## SMD RGBW 24V






| Voltage | Beam Angle | IP | Mounting Type |
|---|---|---|---|
| 24V | 120° | IP20 / IP67 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Roll | Width | IP | SKU |
|---|---|---|---|---|---|---|
| 20W | RGBW | 1600lm/m | 5m | 12mm | IP20 | ILAR-03132 |
| 20W | RGBW | 1600lm/m | 5m | 14mm | IP67 | ILAR-03133 |

**Options (Not included)**



Connector
RGBW
12mm ILAR-03493




Connector-Cabo
RGBW
12mm ILAR-03494




Connector-Cabo-Connector
RGBW
12mm ILAR-03495

## COB PRO RGBW (4000K) 24V






| Voltage | Beam Angle | IP | Mounting Type |
|---|---|---|---|
| 24V | 120° | IP20 / IP67 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Roll | Width | IP | SKU |
|---|---|---|---|---|---|---|
| 20W | RGBW (4000K) | 900lm/m | 5m | 12mm | IP20 | ILAR-01410 |
| 20W | RGBW (4000K) | 900lm/m | 50m | 12mm | IP20 | ILAR-02667 |
| 20W | RGBW (4000K) | 900lm/m | 5m | 14mm | IP67 | ILAR-01688 |

**Options (Not included)**



Connector
RGBW
ILAR-01970



Connector
RGBW
12mm ILAR-03496



Connector-Cabo
RGBW
12mm ILAR-03497



Connector-Cabo-Connector
RGBW
12mm ILAR-03498



## SMD RGB+CCT (2700-6500K) 24V






| Voltage | Beam Angle | IP | Mounting Type |
|---|---|---|---|
| 24V | 120° | IP20 / IP65 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Roll | Width | IP | SKU |
|---|---|---|---|---|---|---|
| 20W | RGB+CCT (2700-6500K) | 70-1555lm/m | 5m | 12mm | IP20 | ILAR-01689 |
| 20W | RGB+CCT (2700-6500K) | 70-1555lm/m | 5m | 12mm | IP65 | ILAR-01690 |

**Options (Not included)**



Connector IP20
RGB+CCT
12mm ILAR-01978



Connector-Cable
RGB+CCT
12mm ILAR-01979



Connector
RGB+CCT
12mm ILAR-03499




Connector-Cabo
RGB+CCT
12mm ILAR-03500




Connector-Cabo-Connector
RGB+CCT
12mm ILAR-03501

## COB RGB+CCT 24V






| Voltage | Beam Angle | IP | Mounting Type |
|---|---|---|---|
| 24V | 120° | IP20 / IP67 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Roll | Width | IP | SKU |
|---|---|---|---|---|---|---|
| 20W | RGB+CCT | 1200lm/m | 5m | 12mm | IP20 | ILAR-03134 |
| 20W | RGB+CCT | 1200lm/m | 5m | 14mm | IP67 | ILAR-03135 |

**Options (Not included)**



Connector
RGB+CCT
12mm ILAR-03502



Connector-Cabo
RGB+CCT
12mm ILAR-03503



Connector-Cabo-Connector
RGB+CCT
12mm ILAR-03504





# SPECIAL LED STRIP

24V

ALL LIGHTING SOLUTIONS

## EXTRA WARM 24V









| Voltage | Beam Angle | IP | Mounting Type |
|---|---|---|---|
| 24V | 120° | IP20 / IP67 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Roll | Width | IP | SKU |
|---|---|---|---|---|---|---|
| 14W | 1800K | 1190lm/m | 5m | 10mm | IP20 | ILAR-01399 |
| | 2200K | 1218lm/m | | | IP20 | ILAR-01400 |
| | 2500K | 1260lm/m | | | IP20 | ILAR-03128 |
| 14W | 1800K | 1130lm/m | 5m | 10mm | IP67 | ILAR-01514 |
| | 2200K | 1157lm/m | | | IP67 | ILAR-01515 |
| | 2500K | 1260lm/m | 5m | 12mm | IP67 | ILAR-03129 |

**Options (Not included)**



Connector Single Color
10mm ILAR-03319



Connector with Screw “T” and “L”
10mm ILAR-03320



Connector with Screw
10mm ILAR-03321



Connector with Screw Single Color
10mm ILAR-03322



Connector “L” Single Color
10mm ILAR-03323



Connector Single Color
10mm ILAR-03324



Connector-Cable Single Color
10mm ILAR-03325




Connector-Cable-Connector Single Color
10mm ILAR-03326



Double Connector 2 Pin
10mm ILAR-01417



Connector+Cable
ILAR-01969

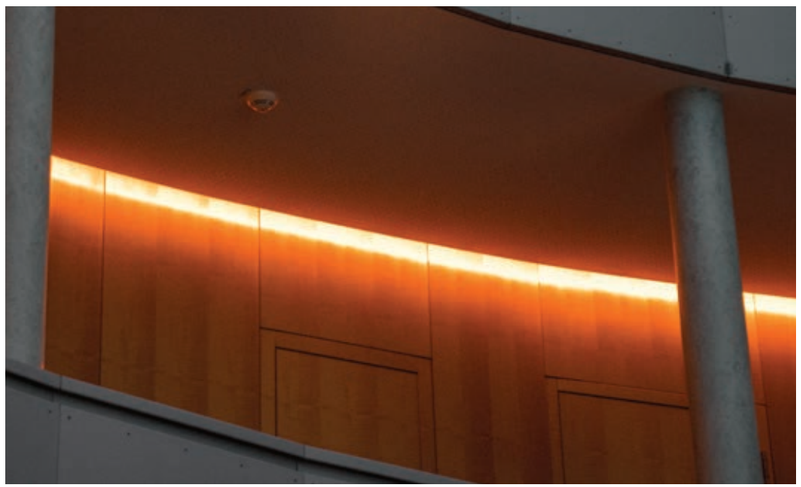



## ZIGUEZAGUE 24V



| Voltage | Beam Angle | IP | Mounting Type |
|---|---|---|---|
| 24V | 120° | IP20 / IP65 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Roll | Width | IP | SKU |
|---|---|---|---|---|---|---|
| 4.8W | 2700K | 460lm/m | 5m | 6mm | IP20 | ILAR-03083 |
| | 3000K | 480lm/m | 5m | | | ILAR-03084 |
| | 4000K | 505lm/m | 5m | | | ILAR-03085 |
| | 6000K | 505lm/m | 5m | | | ILAR-03086 |
| 8W | RGB | 480lm/m | 5m | 10mm | IP65 | ILAR-03154 |
| 12W | 2700K | 876lm/m | 3m | 6mm | IP20 | ILAR-03198 |
| | 3000K | 972lm/m | 3m | | | ILAR-03199 |
| | 4000K | 996lm/m | 3m | | | ILAR-03200 |
| | 6000K | 996lm/m | 3m | | | ILAR-03201 |

## SIDEVIEW 24V









| Voltage | Beam Angle | IP | Mounting Type |
|---|---|---|---|
| 24V | 120° | IP20 / IP67 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Roll | Width | IP | SKU |
|---|---|---|---|---|---|---|
| 15W | 2700K | 1650lm/m | 5m | 10mm | IP20 | ILAR-03138 |
| | 3000K | 1650lm/m | | | | ILAR-03139 |
| | 4000K | 1650lm/m | | | | ILAR-03140 |
| | 6000K | 1650lm/m | | | | ILAR-03141 |
| 15W | 2700K | 1650lm/m | 5m | 12mm | IP67 | ILAR-03142 |
| | 3000K | 1650lm/m | | | | ILAR-03143 |
| | 4000K | 1650lm/m | | | | ILAR-03144 |
| | 6000K | 1650lm/m | | | | ILAR-03145 |

## DIM TO WARM 24V






| Voltage | Beam Angle | IP | Mounting Type |
|---|---|---|---|
| 24V | 120° | IP20 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Roll | Width | IP | SKU |
|---|---|---|---|---|---|---|
| 10W | 1900K-3000K | 60-1100lm/m | 5m | 10mm | IP20 | ILAR-03072 |

## SAUNA 24V



| Voltage | Beam Angle | IP | Mounting Type |
|---|---|---|---|
| 24V | 120° | IP67 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Roll | Width | IP | SKU |
|---|---|---|---|---|---|---|
| 10W | 2700K | 840lm/m | 5m | 10mm | IP67 | ILAR-02326 |
| | 4000K | 980lm/m | | | | ILAR-02327 |
| | 6500K | 980lm/m | | | | ILAR-02328 |
| 10W | 2700K | 840lm/m | 5m | 12mm | IP67 | ILAR-02621 |
| | 4000K | 980lm/m | | | | ILAR-02622 |
| | 6500K | 980lm/m | | | | ILAR-02623 |

**Options (Not included)**



End Cap
10mm ILAR-02554



Connector-Cabo Jumper - 20cm
12mm ILAR-02555



Connector-Cabo
12mm ILAR-02556



End Cap
12mm ILAR-02624






## SPI DIGITAL COB/SMD 24V











| Voltage | Beam Angle | IP | Mounting Type |
|---|---|---|---|
| 24V | 120° | IP20 | Surface |

| Model | Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Roll | Width | IP | SKU |
|---|---|---|---|---|---|---|---|
| COB | 12W | 2700K | 807lm/m | 5m | 10mm | IP20 | ILAR-03249 |
| COB | 12W | 3000K | 807lm/m | | 10mm | IP20 | ILAR-03250 |
| COB | 12W | 4000K | 892lm/m | | 12mm | IP20 | ILAR-03064 |
| COB | 12W | 6000K | 843lm/m | | 10mm | IP20 | ILAR-03251 |
| COB | 12W | CCT 2700K-6500K | 843lm/m | | 10mm | IP20 | ILAR-03252 |
| SMD | 11W | RGBW | 460lm/m | 5m | 10mm | IP20 | ILAR-01703 |
| SMD | 22W | RGB | 880lm/m | | 10mm | IP20 | ILAR-02334 |
| SMD | 22W | RGB | 600lm/m | | 12mm | IP20 | ILAR-02335 |

**Options (Not included)**



Connector COB
ILAR-02510



Connector-Cabo-Connector COB
ILAR-02511



Connector SMD
ILAR-02512



Connector-Cabo SMD
ILAR-02513



Connector-Cabo COB
ILAR-02594



Connector-Cabo SMD
ILAR-02595



# NEON

## TUBES

ALL LIGHTING SOLUTIONS

### TUBO NEON 360° Ø25MM 24V






| Voltage | Beam Angle | IP | Mounting Type |
|---|---|---|---|
| 24V | 360° | IP67 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Roll | Width | IP | SKU |
|---|---|---|---|---|---|---|
| 20W | RGB | 1320lm/m | 5m | Ø25mm | IP67 | ILAR-01691 |
| | RGB | 1320lm/m | 10m | Ø25mm | IP67 | ILAR-02303 |
| 20W | 2700K | 1320lm/m | 5m | Ø25mm | IP67 | ILAR-01692 |
| | 2700K | 1320lm/m | 10m | Ø25mm | IP67 | ILAR-02304 |
| 20W | 4000K | 1495lm/m | 5m | Ø25mm | IP67 | ILAR-01693 |
| | 4000K | 1495lm/m | 10m | Ø25mm | IP67 | ILAR-02305 |

**Options (Not included)**




Inicial Cap
ILAR-01694



Clip
ILAR-01695

### TUBO NEON 160° 13X12MM 24V






| Voltage | Beam Angle | IP | Mounting Type |
|---|---|---|---|
| 24V | 160° | IP67 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Roll | Width | IP | SKU |
|---|---|---|---|---|---|---|
| 10W | 2400K | 714lm/m | 5m | 13x12mm | IP67 | ILAR-01696 |
| | 4000K | 850lm/m | 5m | 13x12mm | IP67 | ILAR-01697 |
| 10W | 2400K | 714lm/m | 10m | 13x12mm | IP67 | ILAR-02307 |
| | 4000K | 850lm/m | 10m | 13x12mm | IP67 | ILAR-02308 |
| 10W | RGB | 850lm/m | 5m | 13x12mm | IP67 | ILAR-01698 |
| | RGB | 850lm/m | 10m | 13x12mm | IP67 | ILAR-02306 |

**Options (Not included)**



Kit Inicial/End Cap
ILAR-01699



Clip
ILAR-01700

## NEON WALL WASHER 24V



| Voltage | Beam Angle | IP | Mounting Type |
|---|---|---|---|
| 24V | 20°/ 15x40° | IP67 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Roll | Width | IP | SKU |
|---|---|---|---|---|---|---|
| - | 3000K | 1956lm/m | 5m | 24x18mm | IP67 | ILAR-03243 |
| | RGBW | 490lm/m | 5m | 24x18mm | IP67 | ILAR-03244 |

**Options (Not included)**



Track 1M
ILAR-03557



Bendable Track 1M
ILAR-03558



Clip
ILAR-03559



End Cap
ILAR-03560

## MODULAR WALL WASHER FLEXIBLE 24V






| Voltage | Beam Angle | IP | Mounting Type |
|---|---|---|---|
| 24V | 20° / 15x40° | IP67 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Beam Angle | Roll | Width | IP | SKU |
|---|---|---|---|---|---|---|---|
| - | 3000K | 2600lm/m | 20° | 2.4m | 30x21mm | IP67 | ILAR-03245 |
| | 3000K | 2226lm/m | 15x40° | 2.4m | 30x21mm | IP67 | ILAR-03246 |
| | RGBW | 585lm/m | 20° | 2.4m | 30x21mm | IP67 | ILAR-03247 |
| | RGBW | 440lm/m | 15x40° | 2.4m | 30x21mm | IP67 | ILAR-03248 |

**Options (Not included)**



Bendable Track 1.2m
ILAR-03561



Clip Wall
ILAR-03562



Anti-Glare Cover
ILAR-03563



## NEON 16X16 24V



| Voltage | Beam Angle | IP | Mounting Type |
|---|---|---|---|
| 24V | - | IP67 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Cut | Width | IP | SKU |
|---|---|---|---|---|---|---|
| 16W/m | 2700K | 1600lm/m | m* | 16x16mm | IP67 | ILAR-03210 |
| 16W/m | 3000K | 1632lm/m | m* | | IP67 | ILAR-03211 |
| 16W/m | 4000K | 1664lm/m | m* | | IP67 | ILAR-03212 |
| 16W/m | 6000K | 1664lm/m | m* | | IP67 | ILAR-03213 |
| 10W/m | RGB | 250lm/m | m* | | IP67 | ILAR-03214 |
| 16W/m | 2700K | 1600lm/m | 5m | 16x16mm | IP67 | ILAR-03334 |
| 16W/m | 3000K | 1632lm/m | 5m | | IP67 | ILAR-03442 |
| 16W/m | 4000K | 1664lm/m | 5m | | IP67 | ILAR-03436 |
| 16W/m | 6000K | 1664lm/m | 5m | | IP67 | ILAR-03440 |
| 10W/m | RGB | 250lm/m | 5m | | IP67 | ILAR-03441 |
| 10W/m | 2700K | 650lm/m | 20m | 16x16mm | IP67 | ILAR-03215 |
| 10W/m | 3000K | 670lm/m | 20m | | IP67 | ILAR-03216 |
| 10W/m | 4000K | 700lm/m | 20m | | IP67 | ILAR-03217 |
| 10W/m | 6000K | 700lm/m | 20m | | IP67 | ILAR-03218 |

*Cutting Patterns - 2 To 3 Weeks for Delivery

**Options (Not included)**



Input Cap Straight
ILAR-03465



Input Cap Botton
ILAR-03466



End Cap
ILAR-03467



Bracket
ILAR-03468



Bendable Track 1M
ILAR-03469



Track 1M
ILAR-03470



Input Cable 2x 0.75mm 2-0,35m
ILAR-03456



Input Cable RGB 4x0.5mm 2-0,35m
ILAR-03457



## NEON SIDE VIEW 10X18 24V



| Voltage | Beam Angle | IP | Mounting Type |
|---|---|---|---|
| 24V | - | IP67 | Surface |

| Model | Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Cut | Width | SKU |
|---|---|---|---|---|---|---|
| Side View | 14W | 2700K | 560lm/m | m* | 10x18mm | ILAR-03223 |
| Side View | 14W | 3000K | 565lm/m | m* | 10x18mm | ILAR-03224 |
| Side View | 14W | 4000K | 580lm/m | m* | 10x18mm | ILAR-03225 |
| Side View | 14W | 6000K | 580lm/m | m* | 10x18mm | ILAR-03226 |
| Side View | 14W | 2700K | 560lm/m | 5m | 10x18mm | ILAR-03437 |
| Side View | 14W | 3000K | 565lm/m | 5m | 10x18mm | ILAR-03438 |
| Side View | 14W | 4000K | 580lm/m | 5m | 10x18mm | ILAR-03439 |
| Side View | 14W | 6000K | 580lm/m | 5m | 10x18mm | ILAR-03443 |
| Side View Long Range | 9.6W | 2700K | 400lm/m | 20m | 10x18mm | ILAR-03230 |
| Side View Long Range | 9.6W | 3000K | 419lm/m | 20m | 10x18mm | ILAR-03231 |
| Side View Long Range | 9.6W | 4000K | 439lm/m | 20m | 10x18mm | ILAR-03232 |
| Side View Long Range | 9.6W | 6000K | 439lm/m | 20m | 10x18mm | ILAR-03233 |
| Side View CCT Change | 19.2W | CCT 2700-6000K | 500-511lm/m | m* | 10x18mm | ILAR-03227 |
| Side View CCT Change | 19.2W | CCT 2700-6000K | 500-511lm/m | 5m | 10x18mm | ILAR-03444 |
| Side View | 14W | RGB | 193lm/m | m* | 10x18mm | ILAR-03228 |
| Side View | 14W | RGB | 193lm/m | 5m | 10x18mm | ILAR-03445 |
| Side View | 14W | RGBW (3000K) | 180lm/m | 5m | 10x18mm | ILAR-03446 |
| Side View SPI Digital | 14W | RGB | 52lm/w | m* | 10x18mm | ILAR-03234 |
| Side View SPI Digital | 14W | RGB | 52lm/w | 5m | 10x18mm | ILAR-03447 |

*Cutting Patterns - 2 To 3 Weeks for Delivery

**Options (Not included)**



Input Cap Straight
ILAR-03471



Input Cap Botton
ILAR-03472



Input Cap Side
ILAR-03473



End Cap
ILAR-03474



Bracket
ILAR-03475



Track 1m
ILAR-03476



Bendable Track 1m
ILAR-03477



Input Cable 2x 0.75mm 2-0,35m
ILAR-03456



Input Cable
2x 0.75mm 2-0,35m
ILAR-03458



Input Cable
3x 0.75mm 2-0,35m
ILAR-03459



Input Cable RGB
4x 0.5mm 2-0,35m
ILAR-03460



Input Cable RGBW
5x 0.3mm 2-0,35m
ILAR-03461



Input Cable RGB SPI
4x 0.5mm 2-0,35m
ILAR-03462



## NEON SIDE VIEW 10X18 230V



| Voltage | Beam Angle | IP | Mounting Type |
|---|---|---|---|
| 230V | - | IP65 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Cut | Width | IP | SKU |
|---|---|---|---|---|---|---|
| 14W/m | 2700K | 490lm/m | m* | 10x18mm | IP65 | ILAR-03219 |
| 14W/m | 3000K | 504lm/m | m* | 10x18mm | IP65 | ILAR-03220 |
| 14W/m | 4000K | 532lm/m | m* | 10x18mm | IP65 | ILAR-03221 |
| 14W/m | 6000K | 532lm/m | m* | 10x18mm | IP65 | ILAR-03222 |

*Cutting Patterns - 2 To 3 Weeks for Delivery

## NEON TOP VIEW 06X06 24V



| Voltage | Beam Angle | IP | Mounting Type |
|---|---|---|---|
| 24V | - | IP67 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Cut | Width | IP | SKU |
|---|---|---|---|---|---|---|
| 8W/m | 2700K | 440lm/m | m* | 06x06mm | IP67 | ILAR-03235 |
| 8W/m | 3000K | 455lm/m | m* | 06x06mm | IP67 | ILAR-03236 |
| 8W/m | 4000K | 470lm/m | m* | 06x06mm | IP67 | ILAR-03237 |
| 8W/m | 6000K | 470lm/m | m* | 06x06mm | IP67 | ILAR-03238 |
| 8W/m | 2700K | 440lm/m | 5m | 06x06mm | IP67 | ILAR-03448 |
| 8W/m | 3000K | 455lm/m | 5m | 06x06mm | IP67 | ILAR-03449 |
| 8W/m | 4000K | 470lm/m | 5m | 06x06mm | IP67 | ILAR-03450 |
| 8W/m | 6000K | 470lm/m | 5m | 06x06mm | IP67 | ILAR-03451 |

*Cutting Patterns - 2 To 3 Weeks for Delivery

**Options (Not included)**



Input Cable 2 Wires - 0,35m
ILAR-03463



Input Cap Straight
ILAR-03482



Input Cap Botton
ILAR-03483



End Cap
ILAR-03484



Bracket
ILAR-03485



Track 1m
ILAR-03486

## NEON SIDE VIEW 03X08 24V



| Voltage | Beam Angle | IP | Mounting Type |
|---|---|---|---|
| 24V | - | IP67 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Cut | Width | IP | SKU |
|---|---|---|---|---|---|---|
| 6W/m | 2700K | 120lm/m | m* | 03x08mm | IP67 | ILAR-03239 |
| 6W/m | 3000K | 135lm/m | m* | 03x08mm | IP67 | ILAR-03240 |
| 6W/m | 4000K | 135lm/m | m* | 03x08mm | IP67 | ILAR-03241 |
| 6W/m | 6000K | 135lm/m | m* | 03x08mm | IP67 | ILAR-03242 |
| 6W/m | 2700K | 120lm/m | 5m | 03x08mm | IP67 | ILAR-03452 |
| 6W/m | 3000K | 135lm/m | 5m | 03x08mm | IP67 | ILAR-03453 |
| 6W/m | 4000K | 135lm/m | 5m | 03x08mm | IP67 | ILAR-03454 |
| 6W/m | 6000K | 135lm/m | 5m | 03x08mm | IP67 | ILAR-03455 |

*Cutting Patterns - 2 To 3 Weeks for Delivery

**Options (Not included)**



Input Cable 2 Wires - 0,2m
ILAR-03464



Input Cap Straight
ILAR-03478



End Cap
ILAR-03479



Bracket
ILAR-03480



Track 1M
ILAR-03481

## NEON PISCINA 24V



| Voltage | Beam Angle | IP | Mounting Type |
|---|---|---|---|
| 24V | - | IP68 | Surface |

| Power | Colour Temperature (CCT) | Total Luminous Flux (±5%) | Roll | Width | IP | SKU |
|---|---|---|---|---|---|---|
| 10W | 2700K | 770lm/m | 5m | 15x10.5mm | IP68 | ILAR-02329 |
| 10W | 4000K | 880lm/m | 5m | 15x10.5mm | IP68 | ILAR-02330 |
| 10W | 2700K | 770lm/m | 10m | 15x10.5mm | IP68 | ILAR-02331 |
| 10W | 4000K | 880lm/m | 10m | 15x10.5mm | IP68 | ILAR-02332 |
| 10W | RGB | 525lm/m | 5m | 15x10.5mm | IP68 | ILAR-02333 |

**Options (Not included)**



Clip
ILAR-02514



Track Polycarbonate 1,22M
ILAR-02515



# CONTROLLERS

## CONTROLADORES

## WIRELESS (RF)



| | Kit 2 in 1<br>Single Color |
|---|---|
| Working Voltage | 12-24V |
| Output | 12A/Channel |
| Total Output | Max 12A |
| RF | 2.4GHz |
| Control Distance | 30m |
| Voltage Remote | 3V (AAA *2pcs) |
| SKU | ILAR-02887 |



| | Kit 3 in 1<br>RGB/RGBW/RGB+CCT |
|---|---|
| Working Voltage | 12-24V |
| Output | 6A/Channel |
| Total Output | Max 12A |
| RF | 2.4GHz |
| Control Distance | 30m |
| Voltage Remote | 3V (AAA *2pcs) |
| SKU | ILAR-02578 |



| | 2 in 1<br>1 Color/CCT |
|---|---|
| Working Voltage | 12-24V |
| Output | 12A/Channel |
| Total Output | Max 12A |
| RF | 2.4GHz |
| Control Distance | 30m |
| Voltage Remote | - |
| SKU | ILAR-01776 |



| | 3 in 1<br>RGB/RGBW/RGB+CCT |
|---|---|
| Working Voltage | 12-24V |
| Output | 6A/Channel |
| Total Output | Max 12A |
| RF | 2.4GHz |
| Control Distance | 30m |
| Voltage Remote | - |
| SKU | ILAR-01779 |



| | 5 in 1 - 1 Color/CCT/<br>RGB/RGBW/RGB+CCT |
|---|---|
| Working Voltage | 12-24-48V |
| Output | 6A/Channel |
| Total Output | Max 15A |
| RF | 2.4GHz |
| Control Distance | 30m |
| Voltage Remote | - |
| SKU | ILAR-01428 |



| | Fast 2 in 1<br>1 Color/CCT |
|---|---|
| Working Voltage | 12-24V |
| Output | 12A/Channel |
| Total Output | Max 12A |
| RF | 2.4GHz |
| Control Distance | 30m |
| Control Option | - |
| SKU | ILAR-02280 |



| | Fast 3 in 1<br>RGB/RGBW/RGB+CCT |
|---|---|
| Working Voltage | 12-24V |
| Output | 6A/Channel |
| Total Output | Max 12A |
| RF | 2.4GHz |
| Control Distance | 30m |
| Control Option | - |
| SKU | ILAR-02279 |



| | 1 Color<br>0/1-10V+Push Dim |
|---|---|
| Working Voltage | 12-24V |
| Output | 12A/Channel |
| Total Output | Max 12A |
| RF | 2.4GHz |
| Control Distance | 30m |
| Control Option | 0/1-10V / Push Dimming |
| SKU | ILAR-01445 |



| | Panel<br>1 Color |
|---|---|
| Working Voltage | 12-24V |
| Output | 5A/Channel |
| Total Output | 10A |
| RF | 2.4GHz |
| Control Distance | 30m |
| Control Option | - |
| SKU | ILAR-01725 |



| | Panel<br>CCT |
|---|---|
| Working Voltage | 12-24V |
| Output | 5A/Channel |
| Total Output | 10A |
| RF | 2.4GHz |
| Control Distance | 30m |
| Control Option | - |
| SKU | ILAR-01726 |



| | Panel 3 in 1<br>RGB/RGBW/RGB+CCT |
|---|---|
| Working Voltage | 12-24V |
| Output | 10A |
| Total Output | 10A |
| RF | 2.4GHz |
| Rated Power | - |
| Control Distance | 30m |
| Control Option | - |
| SKU | ILAR-01727 |



| | Din 1 Color/CCT/RGB/<br>RGBW/CCT |
|---|---|
| Working Voltage | 12-24V |
| Output | 6A/Channel |
| Total Output | Max 10A |
| RF | 2.4GHz |
| Rated Power | - |
| Control Distance | 30m |
| Control Option | - |
| SKU | ILAR-01994 |



| | Module<br>Triac+Push Dim 300W |
|---|---|
| Working Voltage | AC220~240V |
| Output | AC220~240V |
| Total Output | Max 1.36A |
| RF | 2.4GHz |
| Rated Power | Max 300W |
| Control Distance | 30m |
| Control Option | Push Dimming |
| SKU | ILAR-01447 |



| | Module<br>Triac+Push Dim 500W |
|---|---|
| Working Voltage | AC220~240V |
| Output | AC220~240V |
| Total Output | Max 2.27A |
| RF | 2.4G |
| Rated Power | Max 500W |
| Control Distance | 30m |
| Control Option | Push dimming |
| SKU | ILAR-02608 |



| | 1 Color<br>High Voltage |
|---|---|
| Working Voltage | AC220~240V |
| Output | DC 220V |
| Total Output | Max 1.82A |
| RF | 2.4GHz |
| Rated Power | Max 400W |
| Control Distance | 30m |
| Control Option | - |
| SKU | ILAR-01995 |



| | CCT<br>High Voltage |
|---|---|
| Working Voltage | AC220~240V |
| Input | - |
| Output | DC 220V |
| Total Output | Max 1.82A |
| RF | 2.4GHz |
| Rated Power | Max 400W |
| Control Distance | 30m |
| SKU | ILAR-01996 |



| | RGB<br>High Voltage |
|---|---|
| Working Voltage | AC220~240V |
| Input | - |
| Output | DC 220V |
| Total Output | Max 1.82A |
| RF | 2.4GHz |
| Rated Power | Max 400W |
| Control Distance | 30m |
| SKU | ILAR-01997 |



| | Gateway<br>Wireless |
|---|---|
| Working Voltage | - |
| Input | DC5V/500mA (Type-C) |
| Output | - |
| Total Output | - |
| RF | 2.4GHz+WiFi |
| Rated Power | - |
| Control Distance | 30m |
| SKU | ILAR-02600 |



## WIRELESS + WIFI



| | 2 in 1<br>1 Color/CCT |
|---|---|
| Working Voltage | 12-24V |
| Output | 12A/Channel |
| Total Output | Max 12A |
| RF | 2.4GHz |
| Control Distance | 30m |
| Wifi/Bluetooth | WiFi/Bluetooth 4.2 |
| SKU | ILAR-01885 |



| | 5 in 1 - 1 Color/CCT/<br>RGB/RGBW/RGB+CCT |
|---|---|
| Working Voltage | 12-24V |
| Output | 6A/Channel |
| Total Output | Max 15A |
| RF | 2.4GHz |
| Control Distance | 30m |
| Wifi/Bluetooth | WiFi/Bluetooth 4.2 |
| SKU | ILAR-01427 |



| | Fast 2 in 1<br>1 Color/CCT |
|---|---|
| Working Voltage | 12-24V |
| Output | 12A/Channel |
| Total Output | Max 12A |
| RF | 2.4GHz |
| Control Distance | 30m |
| Wifi/Bluetooth | WiFi/Bluetooth 4.2 |
| SKU | ILAR-01986 |



| | Fast 3 in 1<br>RGB/RGBW/RGB+CCT |
|---|---|
| Working Voltage | 12-24V |
| Output | 12A/Channel |
| Total Output | Max 12A |
| RF | 2.4GHz |
| Control Distance | 30m |
| Wifi/Bluetooth | WiFi/Bluetooth 4.2 |
| SKU | ILAR-01987 |



| | 5 in 1 - 1 Color/CCT/<br>RGB/RGBW/RGB+CCT |
|---|---|
| Working Voltage | 12-24-48V |
| Output | 10A/Channel |
| Total Output | Max 20A |
| RF | 2.4GHz |
| Control Distance | 30m |
| Wifi/Bluetooth | WiFi/Bluetooth 4.2 |
| SKU | ILAR-02272 |



| | 5 in 1 - 1 Color/CCT/<br>RGB/RGBW/RGB+CCT |
|---|---|
| Working Voltage | 12-24-48V |
| Output | 15A/Channel |
| Total Output | Max 30A |
| RF | 2.4GHz |
| Control Distance | 30m |
| Wifi/Bluetooth | WiFi/Bluetooth 4.2 |
| SKU | ILAR-02273 |



| | 5 in 1 - 1 Color/CCT/<br>RGB/RGBW/RGB+CCT IP67 |
|---|---|
| Working Voltage | 12-24-48V |
| Output | 10A/Channel |
| Total Output | Max 20A |
| RF | 2.4GHz |
| Control Distance | 30m |
| Wifi/Bluetooth | WiFi/Bluetooth 4.2 |
| SKU | ILAR-01619 |



| | 1 Color With<br>Power SUPPLY 75W |
|---|---|
| Working Voltage | AC220~240V |
| Output | 24Vdc |
| Total Output | Max 3A |
| RF | 2.4GHz |
| Control Distance | 30m |
| Wifi/Bluetooth | WiFi/Bluetooth 4.2 |
| SKU | ILAR-01437 |



| | RGB + CCT With<br>Power Supply 75W |
|---|---|
| Working Voltage | AC220~240V |
| Output | 24Vdc |
| Total Output | Max 3A |
| RF | 2.4GHz |
| Control Distance | 30m |
| Wifi/Bluetooth | WiFi/Bluetooth 4.2 |
| SKU | ILAR-01438 |



| | RGBW With<br>Power Supply 75W |
|---|---|
| Working Voltage | AC220~240V |
| Output | 24Vdc |
| Total Output | Max 3A |
| RF | 2.4GHz |
| Control Distance | 30m |
| Wifi/Bluetooth | WiFi/Bluetooth 4.2 |
| SKU | ILAR-01618 |



| | 1 Color With Power<br>Supply 150W IP67 |
|---|---|
| Working Voltage | AC220~240V |
| Output | 24V |
| Total Output | Max 6.25A |
| RF | 2.4GHz |
| Control Distance | 30m |
| Control Option | Push dimming |
| Wifi/Bluetooth | WiFi/Bluetooth 4.2 |
| SKU | ILAR-01616 |



| | Controller 5 in 1 With<br>Power Supply 150W |
|---|---|
| Working Voltage | AC220~240V |
| Output | 24V |
| Total Output | Max 6.25A |
| RF | 2.4GHz |
| Control Distance | 30m |
| Control Option | Push dimming |
| Wifi/Bluetooth | WiFi/Bluetooth 4.2 |
| SKU | ILAR-03582 |



| | Module Triac+Push<br>Dim 300W |
|---|---|
| Working Voltage | AC220~240V |
| Output | AC220~240V |
| Total Output | Max 1.36A (300W) |
| RF | 2.4GHz |
| Control Distance | 30m |
| Control Option | Push dimming |
| Wifi/Bluetooth | WiFi/Bluetooth 4.2 |
| SKU | ILAR-01993 |



| | Module Triac+Push<br>Dim+Wireless |
|---|---|
| Working Voltage | AC220~240V |
| Output | AC220~240V |
| Total Output | Max 2.27A (500W) |
| RF | 2.4GHz |
| Control Distance | 30m |
| Control Option | Push dimming |
| Wifi/Bluetooth | WiFi/Bluetooth 4.2 |
| SKU | ILAR-02609 |

## WIRELESS + ZIGBEE



| | 2 in 1<br>1 Color/CCT |
|---|---|
| Working Voltage | 12-24V |
| Output | 12A/Channel |
| Total Output | Max 12A |
| RF | 2.4GHz |
| Control Distance | 30m |
| Conection Mode | ZigBee |
| SKU | ILAR-01777 |



| | 3 in 1<br>RGB/RGBW/RGBCCT |
|---|---|
| Working Voltage | 12-24V |
| Output | 6A/Channel |
| Total Output | Max 12A |
| RF | 2.4GHz |
| Control Distance | 30m |
| Conection Mode | ZigBee |
| SKU | ILAR-01787 |



| | 5 in 1<br>1 Color/CCT/RGB/RGBCCT |
|---|---|
| Working Voltage | 12-24-48V |
| Output | 6A/Channel |
| Total Output | Max 15A |
| RF | 2.4GHz |
| Control Distance | 30m |
| Conection Mode | ZigBee |
| SKU | ILAR-01620 |



| | Fast 2 in 1<br>1 Color/CCT |
|---|---|
| Working Voltage | 12-24V |
| Output | 12A/Channel |
| Total Output | Max 12A |
| RF | 2.4GHz |
| Control Distance | 30m |
| Conection Mode | ZigBee |
| SKU | ILAR-02277 |



| | Fast 3 in 1<br>RGB/RGBW/RGB+CCT |
|---|---|
| Working Voltage | 12-24V |
| Output | 12A/Channel |
| Total Output | Max 12A |
| RF | 2.4GHz |
| Control Distance | 30m |
| Conection Mode | ZigBee |
| SKU | ILAR-02276 |

## WIRELESS + ZIGBEE






| | 5 in 1 - 1 Color/CCT/ RGB/RGBW/RGB+CCT | Module Triac+Push Dim 300W | Module Triac+Push Dimm+Wireless+ZigBee | Gateway Zigbee Zigbee 3.0 + BLE |
|---|---|---|---|---|
| **Working Voltage** | 12-24-48V | AC220~240V | AC220~240V | 5V (1A) MICRO USB |
| **Output** | 10A/Channel | AC220~240V | AC220~240V | - |
| **Total Output** | Max 20A | Max 1.36A (300W) | Max 2.27A (500W) | - |
| **RF** | 2.4GHz | 2.4GHz | 2.4G | ZigBee |
| **Control Distance** | 2.4G 30m / Zigbee 100m | 2.4G 30m / Zigbee 100m | 2.4G 30m / Zigbee 100m | 30m Indoor / 100m Outdoor |
| **Conection Mode** | ZigBee | ZigBee | ZigBee | WiFi |
| **SKU** | ILAR-02278 | ILAR-01615 | ILAR-02610 | ILAR-01780 |

## WIRELESS







| | Remote 1 Color | Remote 1 Color | Remote CCT | Remote CCT | Remote CCT |
|---|---|---|---|---|---|
| **Working Voltage** | 3V (CR2033 Battery-1pc) | 3V (CR2033 Battery-1pc) | 3V (CR2032 Battery-1pc) | 3V (CR2032 Battery-1pc) | 3V (CR2032 Battery-1pc) |
| **RF** | 2.4GHz | 2.4GHz | 2.4GHz | 2.4GHz | 2.4GHz |
| **Control Distance** | 30m | 30m | 30m | 30m | 30m |
| **Color** | White | Black | White | Black | White |
| **SKU** | ILAR-01448 | ILAR-01449 | ILAR-01991 | ILAR-01992 | ILAR-02281 |







| | Remote CCT | Remote 1 Color | Remote 1 Color/CCT | Remote 1 Color/CCT 4 Zones | Remote RGB + CCT |
|---|---|---|---|---|---|
| **Working Voltage** | 3V (CR2033 Battery-1pc) | 3V (AAA Battery-2pcs) | 3V (AAA Battery-2pcs) | 3V (AAA Battery-2pcs) | 3V (AAA Battery-2pcs) |
| **RF** | 2.4GHz | 2.4GHz | 2.4GHz | 2.4GHz | 2.4GHz |
| **Control Distance** | 30m | 30m | 30m | 30m | 30m |
| **Color** | Black | White | White | White | White |
| **SKU** | ILAR-02313 | ILAR-01429 | ILAR-02471 | ILAR-01989 | ILAR-02049 |







| | Remote RGB/RGBW/ RGB+CCT 4 Zones | Panel RGB+CCT | Panel 1 Color 4 Zones | Panel 1 Color 4 Zones | Panel 1 Color 4 Zones |
|---|---|---|---|---|---|
| **Working Voltage** | 3V (AAA Battery-2pcs) | 3V (AAA Battery-2pcs) | 3V (AAA Battery-2pcs) | 3V (AAA Battery-2pcs) | AC220~240V |
| **RF** | 2.4GHz | 2.4GHz | 2.4GHz | 2.4GHz | 2.4GHz |
| **Control Distance** | 30m | 30m | 30m | 30m | 30m |
| **Color** | White | White | White | White | White |
| **SKU** | ILAR-01990 | ILAR-01431 | ILAR-02051 | ILAR-01430 | ILAR-01439 |



## WIRELESS







| | Panel CCT 4 Zones | Panel CCT 4 Zones | Panel RGBW 4 Zones | Panel RGBW 4 Zones | Panel RGB+CCT 4 Zones |
|---|---|---|---|---|---|
| **Working Voltage** | 3V (AAA Battery-2pcs) | AC220~240V | 3V (AAA Battery-2pcs) | AC220~240V | 3V (AAA Battery-2pcs) |
| **RF** | 2.4GHz | 2.4GHz | 2.4GHz | 2.4GHz | 2.4GHz |
| **Control Distance** | 30m | 30m | 30m | 30m | 30m |
| **Color** | White | White | White | White | White |
| **SKU** | ILAR-01622 | ILAR-01720 | ILAR-01988 | ILAR-01440 | ILAR-01911 |







| | Panel RGB+CCT 4 Zones | Panel RGB+CCT 8 Zones | Remote RGB+CCT 4 Zones | Remote RGB+CCT 8 Zones | CCT (Rotate) 4 Zones |
|---|---|---|---|---|---|
| **Working Voltage** | AC220~240V | 3V (AAA 2Pcs) / DC3.3V | 3V (AAA Battery-2pcs) | 3V (AAA Battery-2pcs) | 3V (AAA Battery-2pcs) |
| **RF** | 2.4GHz | 2.4GHz | 2.4GHz | 2.4GHz | 2.4GHz |
| **Control Distance** | 30m | 30m | 30m | 30m | 30m |
| **Color** | White | White | White | White | White |
| **SKU** | ILAR-01912 | ILAR-01882 | ILAR-01672 | ILAR-01872 | ILAR-01883 |







| | CCT 4 Zones | Dimming & CCT Change | ON/OFF - Smart Plug & Switch | Remote Wireless C3(Dimming & CCT Change) | Remote Wireless C4 RGB+CCT |
|---|---|---|---|---|---|
| **Working Voltage** | 3V (AAA Battery-2pcs) | 3V (AAA 2Pcs) / DC3.3V | 3V (AAA Battery-2pcs) | 3V (AAA Battery-2pcs) | 3V (AAA Battery-2pcs) |
| **RF** | 2.4GHz | 2.4GHz | 2.4GHz | 2.4GHz | 2.4GHz |
| **Control Distance** | 30m | 30m | 30m | 30m | 30m |
| **Color** | White | Black | Black | Black | Black |
| **SKU** | ILAR-01884 | ILAR-02275 | ILAR-02274 | ILAR-03583 | ILAR-03584 |



| | RGB+CCT 433MHZ |
|---|---|
| **Working Voltage** | 3V (AAA Battery-2pcs) |
| **RF** | 433MHz |
| **Control Distance** | 2000m (open area) |
| **Color** | White |
| **SKU** | ILAR-01881 |

## OTHER CONTROLLERS

| | Pixel/SPI RGB/RGBW Wifi+Wireless | Remote Pixel/SPI RGB/ RGBW | Controller SPI Single Colour+Remote | Controller SPI CCT Change+Remote | Mini Controller SPI Single/RGB/RGBW |
|---|---|---|---|---|---|
| **Working Voltage** | 5-24V | 3VDC (CR2032) | 12-24V | 12-24V | DC5V~24V |
| **Output** | SPI | - | SPI | SPI | SPI |
| **Total Output** | Max 12A | - | - | - | Max 6A |
| **RF** | 2.4GHz | 2.4GHz | 2.4GHz | 2.4GHz | 2.4GHz |
| **Control Distance** | 30m | 30m | 30m | 30m | 30m |
| **Conection Mode** | - | - | - | - | - |
| **Wifi/Bluetooth** | WiFi/Bluetooth 4.2 | - | - | - | - |
| **SKU** | ILAR-02092 | ILAR-02093 | ILAR-03155 | ILAR-03288 | ILAR-03269 |

| | Controller Fita SPI Single/RGB/RGBW | Remote Wireless Single/RGB/RGBW | Remote Wireless Single/RGB/RGBW | Controller SPI 5 in 1 | Remote Wireless SPI Black C9-B |
|---|---|---|---|---|---|
| **Working Voltage** | DC5V~24V | 3V (AAA*2PCS) | 3V (AAA*2PCS) | DC5V~24V | 3V (AAA*2PCS) |
| **Output** | SPI | - | - | SPI | - |
| **Total Output** | Max 10A | - | - | Max 10A | - |
| **RF** | 2.4GHz | 2.4GHz | 2.4GHz | 2.4GHz | 2.4GHz |
| **Control Distance** | 30m | 30m | 30m | 30m | 30m |
| **Conection Mode** | - | - | - | - | - |
| **Wifi/Bluetooth** | - | - | - | WiFi | - |
| **SKU** | ILAR-03268 | ILAR-03272 | ILAR-03273 | ILAR-03512 | ILAR-03513 |

| | Remote Wireless SPI | Controller SPI 5 in 1 4Ch | Remote Wireless SPI Black C10-B | Controller Stair Single Color | Controller Stair Single Color |
|---|---|---|---|---|---|
| **Working Voltage** | 3V(2*AAA) / DC3.3V | DC5V~24V | 3V (AAA*2PCS) | DC5V~24V | 5-24VDC |
| **Output** | - | SPI 4Channel | - | DC5V~24V | 32 (5-24) VDC |
| **Total Output** | - | Max 10A | - | - | - |
| **RF** | 2.4GHz | 2.4GHz | 2.4GHz | - | - |
| **Control Distance** | 30m | 30m | 30m | 3m | 3m |
| **Conection Mode** | - | - | - | - | - |
| **Wifi/Bluetooth** | - | WiFi | - | - | - |
| **SKU** | ILAR-03514 | ILAR-03749 | ILAR-03750 | ILAR-03277 | ILAR-03278 |

| | Controller Stair Bth+2.4CHz | Module 0-10V/1-10V RF+Push Dimmer | Module 0-10V/1-10V WIFI+RF+Push Dimmer | Module 0-10V/1-10V 2 CH/ WIFI+RF+Push Dimmer | Regulator 0-10V Basic - Black |
|---|---|---|---|---|---|
| **Working Voltage** | DC24V | AC220~240V | AC220~240V | AC220~240V | 0-10V |
| **Output** | - | 0-10V (20mA) | 0-10V (20mA) | 2x 0/1-10V | 0-10V |
| **Total Output** | - | - | - | Max 3A | - |
| **RF** | 2.4GHz | RF 2.4GHz + Push Dim | Tuya APP + RF + Push Dim | Tuya APP + RF + Push Dim | - |
| **Control Distance** | 30m | 30m | 30m | 30m | - |
| **Conection Mode** | - | - | - | - | - |
| **Wifi/Bluetooth** | Bluetooth | - | - | - | - |
| **SKU** | ILAR-03274 | ILAR-01900 | ILAR-01901 | ILAR-02021 | ILAR-02828 |



## OTHER CONTROLLERS

| | Module 0-10V/1-10V Zigbee+RF+Push Dimmer | Regulator Panel RF&DMX512 (230V) | Regulator Panel RF&0/1-10V (230V) | Panel RF&0/1-10V 4 Zones (230v) | Gateway WiFi 433MHz |
|---|---|---|---|---|---|
| **Working Voltage** | AC220~240V | AC220~240V | AC220~240V | AC220~240V | DC5V/500MA (5.5x2.1mm) |
| **Output** | 0-10V (20mA) | DMX512, RF 2.4GHz | Max. 3A (AC) | 0-10V (20mA) | 15dBm |
| **Total Output** | - | - | - | 20mA/CH | - |
| **RF** | Tuya APP + RF + Push Dim | Rotary knob+RF 2.4GHz | Rotary knob+RF 2.4GHz | Touch key+RF 2.4GHz | 433MHz |
| **Control Distance** | 30m | 10m | 30m | 10m | 50m / 1000m |
| **Conection Mode** | - | - | - | - | WiFi |
| **Wifi/Bluetooth** | - | - | - | - | - |
| **SKU** | ILAR-01902 | ILAR-01903 | ILAR-01904 | ILAR-01905 | ILAR-02283 |

| | Mini Switch WiFi+2.4GHz 10A | PIR Sensor (120°) ZigBee | Module Mini Triac 2CH WiFi+Push | Module DALI+Push Dimm DBUS100mA | 5 in 1 - 1 Color/CCT/RGB/ RGBCCT) DALI DT8 |
|---|---|---|---|---|---|
| **Working Voltage** | AC220~240V | CR123A 3V BATTERY | AC220~240V | AC220~240V | 12-24V |
| **Output** | AC220~240V | - | AC220~240V | 16VDC-100mA | 6A/Channel |
| **Total Output** | Max 10A | - | 2x100W | - | Max 20A |
| **RF** | 2.4GHz | - | APP Tuyasmart/Smart Life | - | - |
| **Control Distance** | 30m | Detection Distance 7m | 10m | - | - |
| **Conection Mode** | - | Zigbee 802.15.4 | WiFi 2.4GHz | DALI + Push Button | DALI |
| **Wifi/Bluetooth** | - | - | - | - | - |
| **SKU** | ILAR-01998 | ILAR-01624 | ILAR-02033 | ILAR-03010 | ILAR-01442 |

| | Module DALI WiFi+RF (24V) DT6/DT7/DT8 | Module DALI&Push Triac 200W | Module DALI&Push Triac 200W | Painel Regulador Triac&RF | Painel Regulador WiFi+RF&TRIAC |
|---|---|---|---|---|---|
| **Working Voltage** | 24VDC | AC220~240V | AC220~240V | AC220~240V | AC220~240V |
| **Output** | - | AC220~240V | AC220~240V | AC220~240V | AC220~240V |
| **Total Output** | - | 200W | 200W | 200W | 200W |
| **RF** | 2.4GHZ | - | - | 2.46GHz | 2.4GHz |
| **Control Distance** | - | - | - | - | - |
| **Conection Mode** | WiFi + RF 2.4GHZ + DALI | DALI to Triac | DALI to Triac | - | WiFi + Rotary knob |
| **Wifi/Bluetooth** | - | - | - | - | - |
| **SKU** | ILAR-03011 | ILAR-03012 | ILAR-02669 | ILAR-03013 | ILAR-03014 |

| | Module DALI&Push 0/1-10V | Mini Switch WiFi 16A Power Meter | Curtain Module WiFi (Módulo Para Estores) | Module Estores/Cortinas 2 saídas ZigBee | Converter 1-10V for DALI with 12v line |
|---|---|---|---|---|---|
| **Working Voltage** | DALI bus | AC220~240V | AC220~240V | AC220~240V | 12V |
| **Output** | 0/1-10V, 20mA | AC220~240V | AC220~240V | AC220~240V | - |
| **Total Output** | - | 16A | 2x 3A | 2x 3A | - |
| **RF** | - | - | - | - | - |
| **Control Distance** | - | - | - | - | - |
| **Conection Mode** | DALI to 0/1-10V | Push Button | Push Button | Push Button | DALI to 0/1-10V |
| **Wifi/Bluetooth** | - | WiFi | WiFi | ZigBee | - |
| **SKU** | ILAR-03015 | ILAR-02060 | ILAR-02032 | ILAR-02916 | ILAR-01753 |

## OTHER CONTROLLERS

| |  |  |  |
|---|---|---|---|
| | **Converter 1-10V for DALI IP67 without 12v line** | **Disjuntor WiFi Smart 10A with Power Meter** | **Disjuntor WiFi Smart 16A with Power Meter** |
| **Working Voltage** | DALI bus | AC220~240V | AC220~240V |
| **Output** | - | AC220~240V | AC220~240V |
| **Total Output** | - | 10A | 16A |
| **RF** | - | - | - |
| **Control Distance** | - | - | - |
| **Conection Mode** | DALI to 0/1-10V | - | - |
| **Wifi/Bluetooth** | - | WiFi | WiFi |
| **SKU** | ILAR-01754 | ILAR-02918 | ILAR-02919 |

## DALI/DMX

| |  |  |  |  |  |
|---|---|---|---|---|---|
| | **Controller Master Parede DMX X4 RGBW** | **Controller Master Parede DMX X5 RGB+CCT** | **Controller Master Parede DMX X3 RGB** | **1 Color DMX512 RDM** | **RGB DMX512 RDM** |
| **Working Voltage** | 100-240V~ 50/60Hz | 100-240V~ 50/60Hz | 100-240V~ 50/60Hz | 12-24V | 12-24V |
| **Output** | - | - | - | - | 3A/Channel |
| **Total Output** | - | - | - | Max 20A | Max 18A |
| **RF** | 2.4GHz | 2.4GHz | 2.4GHz | Dmx512, RDM | Dmx512, RDM |
| **Conection Mode** | - | - | - | Occupy 1 DMX Address | Occupy 3 DMX Address |
| **SKU** | ILAR-02569 | ILAR-02606 | ILAR-02607 | ILAR-02123 | ILAR-01785 |

| |  |  |
|---|---|---|
| | **RGBW DMX512 RDM** | **RGB+CCT DMX512 RDM** |
| **Working Voltage** | 12-24V | 12-24V |
| **Output** | 4A/Channel | 5A/Channel |
| **Total Output** | Max 20A | Max 20A |
| **RF** | Dmx512, RDM | Dmx512, RDM |
| **Conection Mode** | Occupy 4 DMX Address | Occupy 5 DMX Address |
| **SKU** | ILAR-01613 | ILAR-01786 |



# POWER SUPPLY

12V / 24V / 48V

## POWER SUPPLY 12V



| Voltage | Body Material |
|---|---|
| 176-264 50-60Hz | Aluminium |

| Power | V-out | I-out Max | IP | SKU |
|---|---|---|---|---|
| 36W | 12V | 3A | IP20 | ILAR-00900 |
| 60W | 12V | 5A | IP20 | ILAR-00901 |
| 100W | 12V | 8.3A | IP67 | ILAR-02566 |
| 150W | 12V | 12.5A | IP67 | ILAR-02567 |

## POWER SUPPLY 24V



| Voltage | Body Material |
|---|---|
| 176-264 50-60Hz | Aluminium |

| Power | V-out | I-out Max | IP | SKU |
|---|---|---|---|---|
| 36W | 24V | 1.5A | IP20 | ILAR-00902 |
| 60W | 24V | 2.5A | IP20 | ILAR-00903 |
| 80W | 24V | 3.33A | IP20 | ILAR-00989 |
| 100W | 24V | 4.17A | IP20 | ILAR-00904 |
| 120W | 24V | 5A | IP20 | ILAR-00905 |
| 150W | 24V | 6.3A | IP20 | ILAR-00906 |
| 200W | 24V | 8.3A | IP20 | ILAR-00907 |
| 250W | 24V | 10A | IP20 | ILAR-01147 |
| 320W | 24V | 13.3A | IP20 | ILAR-01148 |

## DIMMABLE TRIAC 0-10V



| Voltage | Body Material |
|---|---|
| 175-240 50-60Hz | Aluminium |

| Power | V-out | I-out Max | IP | SKU |
|---|---|---|---|---|
| 60W | 24V | 2.5A | IP20 | ILAR-01175 |
| 100W | 24V | 4.1A | IP20 | ILAR-01176 |
| 150W | 24V | 6.2A | IP20 | ILAR-01177 |
| 200W | 24V | 8.3A | IP20 | ILAR-01178 |

## POWER SUPPLY 24V IP67



| Voltage | Body Material |
|---|---|
| 175-240 50-60Hz | Aluminium |

| Power | V-out | I-out Max | IP | SKU |
|---|---|---|---|---|
| 36W | 24V | 1.5A | IP67 | ILAR-01181 |
| 60W | 24V | 2.5A | IP67 | ILAR-01182 |
| 100W | 24V | 4.17A | IP67 | ILAR-01183 |
| 150W | 24V | 6.25A | IP67 | ILAR-01243 |
| 200W | 24V | 8.3A | IP67 | ARDV-01029 |

## POWER SUPPLY SERIE M 24V IP67



| Voltage | Body Material |
|---|---|
| 175-240 50-60Hz | ABS + PC |

| Power | V-out | I-out Max | IP | SKU |
|---|---|---|---|---|
| 36W | 24V | - | IP67 | ILAR-03262 |
| 60W | 24V | | IP67 | ILAR-03263 |
| 100W | 24V | | IP67 | ILAR-03264 |
| 150W | 24V | | IP67 | ILAR-03265 |
| 200W | 24V | | IP67 | ILAR-03266 |



## ARON PRO LINEAR



| Voltage | Body Material |
|---|---|
| 176-264 50-60Hz | Aluminium |

| Power | V-out | I-out Max | IP | SKU |
|---|---|---|---|---|
| 40W | 12V | - | IP67 | ILAR-03585 |
| 100W | 12V | | IP67 | ILAR-03586 |
| 200W | 12V | | IP67 | ILAR-03587 |
| 100W | 24V | | IP67 | ILAR-02066 |
| 200W | 24V | | IP67 | ILAR-02067 |
| 250W | 24V | | IP67 | ILAR-02068 |
| 40W | 48V | | IP67 | ILAR-03588 |
| 100W | 48V | | IP67 | ILAR-03589 |
| 200W | 48V | | IP67 | ILAR-03590 |

## ARON PRO



| Voltage | Body Material |
|---|---|
| 176-264 50-60Hz | Aluminium |

| Power | V-out | I-out Max | IP | SKU |
|---|---|---|---|---|
| 100W | 24V | - | IP20 | ILAR-02069 |
| 250W | 24V | | IP20 | ILAR-02070 |
| 350W | 24V | | IP20 | ILAR-02071 |

## ARON PRO DALI+PUSH+0-10V



| Voltage | Body Material |
|---|---|
| 176-264 50-60Hz | Aluminium |

| Power | V-out | I-out Max | IP | SKU |
|---|---|---|---|---|
| 100W | 24V | - | IP67 | ILAR-02072 |
| 200W | 24V | | IP67 | ILAR-02073 |
| 250W | 24V | | IP67 | ILAR-02074 |
| 100W | 24V | | IP67 | ILAR-03591 |
| 200W | 24V | | IP67 | ILAR-03592 |
| 300W | 24V | | IP67 | ILAR-03593 |

## ARON PRO TRIAC/0-10V/1-10V



| Voltage | Body Material |
|---|---|
| 176-264 50-60Hz | Aluminium |

| Power | V-out | I-out Max | IP | SKU |
|---|---|---|---|---|
| 100W | 24V | - | IP67 | ILAR-02075 |
| 200W | 24V | | IP67 | ILAR-02076 |
| 300W | 24V | | IP67 | ILAR-02077 |

## POWER SUPPLY MEANWELL 24V IP20



| Voltage | Body Material |
|---|---|
| 176-264 50-60Hz | Aluminium |

| Power | V-out | I-out Max | IP | SKU |
|---|---|---|---|---|
| 35W | 24V | - | IP20 | ILDV-00445 |
| 52.8W | 24V | 2.2A | IP20 | ILDV-00033 |
| 75W | 24V | 5A | IP20 | ILDV-00444 |
| 108W | 24V | 5A | IP20 | ILDV-00034 |
| 156W | 24V | 6.5A | IP20 | ILDV-00035 |
| 200W | 24V | - | IP20 | ILDV-00442 |
| 350W | 24V | - | IP20 | ILDV-00443 |
| 500W | 24V | 21A | IP20 | ILDV-01138 |

## POWER SUPPLY MEANWELL 24V IP67



| Voltage | Body Material |
|---|---|
| 176-264 50-60Hz | Aluminium |

| Power | V-out | I-out Max | IP | SKU |
|---|---|---|---|---|
| 201.6W | 24V | 8.4A | IP67 | ILDV-00036 |
| 350.4W | 24V | 14.6A | IP67 | ILDV-00037 |
| | | | | |
| 75W | 24V | 3.1A | IP67 | ILDV-00038 |
| 100W | 24V | 4A | IP67 | ILDV-00039 |
| 150W | 24V | 6.25A | IP67 | ILDV-00040 |
| 200W | 24V | 8.3A | IP67 | ILDV-00041 |
| | | | | |
| 20W | 24V | | IP67 | ILDV-00446 |
| 35W | 24V | | IP67 | ILDV-00048 |
| 60W | 24V | | IP67 | ILDV-00439 |
| 100W | 24V | | IP67 | ILDV-00440 |
| 150W | 24V | | IP67 | ILDV-00441 |
| 480W | 24V | 20A | IP67 | ILDV-01137 |



# PROFILE LED



ALUMINUM PROFILE

## ALUMINUM PROFILE FOR LED STRIP

| | | Installation | Length | Width | Height | Interior | Housing Colour | Body Material | SKU |
|---|---|---|---|---|---|---|---|---|---|
|  | Profile Aluminium/Opal | Surface | 2M | 15mm | 8mm | 8mm | Aluminium | Aluminium | ILAR-01033 |
|  | Profile Aluminium/Opal | Surface | 2M | 13mm | 6.9mm | 10mm | White | Aluminium | ILAR-02122 |
|  | Profile Aluminium/Opal | Surface | 2M | 17.5mm | 8mm | 15mm | Aluminium | Aluminium | ILAR-00469 |
|  | Profile Aluminium/Opal | Surface | 2M | 17.3mm | 7.6mm | 12.3mm | White | Aluminium | ILAR-02314 |
|  | Profile Aluminium/Opal | Surface | 2M | 17.3mm | 7.6mm | 12.3mm | Black | Aluminium | ILAR-02315 |
|  | Profile Aluminium/Opal | Surface | 2M | 17.5mm | 14mm | 12mm | Aluminium | Aluminium | ILAR-01034 |
|  | Profile Aluminium/Opal | Surface | 2M | 25mm | 15mm | 23mm | Aluminium | Aluminium | ILAR-03290 |
|  | Profile Aluminium/Opal | Surface | 2M | 20mm | 21mm | 17mm | Aluminium | Aluminium | ILAR-01229 |
|  | Profile Aluminium/Opal | Surface | 2M | 23.5mm | 10mm | 20mm | Aluminium | Aluminium | ILAR-02103 |
|  | Profile “U” Aluminium/Opal | Surface | 2M | 55mm | 33mm | 50mm | Aluminium | Aluminium | ILAR-01038 |



## ALUMINUM PROFILE FOR LED STRIP

| | | Installation | Length | Width | Height | Interior | Cut-out | Housing Colour | Body Material | SKU |
|---|---|---|---|---|---|---|---|---|---|---|
|  | Profile Aluminium/Opal | Recessed | 2M | 24.5mm | 7.5mm | 12mm | 17.5mm | Aluminium | Aluminium | ILAR-00465 |
|  | Profile Aluminium/Opal | Recessed | 2M | 24.5mm | 7.69mm | 12.3mm | 17.5mm | White | Aluminium | ILAR-02316 |
|  | Profile Aluminium/Opal | Recessed | 2M | 24.5mm | 7.69mm | 12.3mm | 17.5mm | Black | Aluminium | ILAR-02317 |
|  | Profile Aluminium/Opal | Recessed | 2M | 25mm | 14mm | 12mm | 16mm | Aluminium | Aluminium | ILAR-01035 |
|  | Profile Aluminium/Opal | Recessed | 2M | 25mm | 14.4mm | 14mm | 17.4mm | White | Aluminium | ILAR-02318 |
|  | Profile Aluminium/Opal | Recessed | 2M | 24.99mm | 14.47mm | 14.3mm | 17mm | Black | Aluminium | ILAR-03329 |
|  | Profile Aluminium/Opal | Recessed | 2M | 30mm | 10mm | 20.7mm | 23mm | Aluminium | Aluminium | ILAR-01251 |
|  | Profile Aluminium/Opal | Recessed | 2M | 43mm | 20mm | 28mm | 30mm | Aluminium | Aluminium | ILAR-01199 |
|  | Profile “U” Aluminium/Opal | Recessed | 2M | 62mm | 35.3 | 45mm | 48.5mm | Aluminium | Aluminium | ILAR-01037 |

| | | Installation | Length | Width | Height | Interior | Cut-out | Angle | Housing Colour | Body Material | SKU |
|---|---|---|---|---|---|---|---|---|---|---|---|
|  | Profile Aluminium/Opal | Recessed | 2M | 55mm | 12mm | 12.8mm | 15.35mm | - | Aluminium | Aluminium | ILAR-02746 |
|  | Profile Aluminium/Opal | Recessed | 2M | 58mm | 12mm | 21.07mm | 23mm | - | Aluminium | Aluminium | ILAR-02747 |
|  | Profile Aluminium/Opal | Recessed | 2M | 51mm | 12.5mm | 13mm | 15mm | - | Aluminium | Aluminium | ILAR-03046 |
|  | Profile Aluminium/Opal | Recessed | 2M | 56mm | 12.5mm | 18mm | 20mm | - | Aluminium | Aluminium | ILAR-03047 |
|  | Profile Aluminium/Opal | Recessed | 2M | 90mm | 35mm | 21.3mm | 46.8mm | 115° | White | Aluminium | ILAR-01508 |

## ALUMINUM PROFILE FOR LED STRIP

| | Installation | Length | Width | Height | Interior | Housing Colour | Body Material | SKU |
|---|---|---|---|---|---|---|---|---|
|  Profile Aluminium Round Corner/Opal | Surface | 2M | 16mm | 16mm | 10mm | Aluminium | Aluminium | ILAR-00467 |
|  Profile Aluminium Square Corner/Opal | Surface | 2M | 16mm | 16mm | 10mm | Aluminium | Aluminium | ILAR-00466 |

| | Installation | Length | Width | Height | Interior | Housing Colour | Body Material | SKU |
|---|---|---|---|---|---|---|---|---|
|  Profile Aluminium/Opal Flexible | Surface | 2M | 18mm | 6.4mm | 13.2mm | Aluminium | Aluminium | ILAR-02104 |
|  Profile Aluminium/Opal Tube Round (320°) | Surface Pendant | 2M | Ø30mm | Ø30mm | 21mm | Aluminium | Aluminium | ILAR-02319 |
|  Profile Aluminium/Opal Baseboard | Surface | 2M | 18mm | 80mm | 12.5mm | Aluminium | Aluminium | ILAR-01507 |

## ACCESSORIES FOR LED STRIP

| | SKU |
|---|---|
|  Touch Sensor ON/OFF and Dimmer | ILDV-00008 |
|  Sensor PIR | ILDV-00009 |
|  Hand Sensor ON/OFF and Dimmer | ILDV-00010 |





Copyright © Aronlight, 2026
All rights reserved. No part of this catalogue may be reproduced in any form on by an electronic or mechanical means, including information storage and retrieval systems, without permission in writing from Aronlight.

*Todos os direitos reservados. Nenhuma parte deste catálogo pode ser reproduzida de qualquer forma por meios eletrônicos ou mecânicos, incluindo sistemas de armazenamento e recuperação de informações, sem a permissão por escrito da Aronlight.*

*Reservados todos los derechos. Ninguna parte de este catálogo se puede reproducir de ninguna forma por medios electrónicos o mecánicos, incluidos los sistemas de almacenamiento y recuperación de información, sin el permiso por escrito de Aronlight.*

*Tutti i diritti riservati. Nessuna parte di questo catalogo può essere riprodotta in qualsiasi forma con mezzi elettronici o meccanici, compresi i sistemi di archiviazione e recupero delle informazioni, senza l'autorizzazione scritta di Aronlight.*

*Tous droits réservés. Aucune partie de ce catalogue ne peut être reproduite sous quelque forme que ce soit, par des moyens électroniques ou mécaniques, y compris les systèmes de stockage et de récupération d'informations, sans l'autorisation écrite d'Aronlight.*

## CONTACTS

**Office - Lisboa**
Estrada Outurela, 131A
2790-118 - Carnaxide
Portugal

**Office - Centro de Negócios da Maia - Porto**
Rua Albino José Domingues, 62
4470-557, Moreira-Maia
Portugal

**Office - Madrid**
Calle Velazquez, 24, 2° Izda
28001, Madrid
Spain

**Office - Roma**
Via Paganico, 56
00049, Velletri
Italy

**Logistics - Sintra**
Sítio das Algadroeiras
Rua do Porteval
2705-841, Godigana
Portugal

www.aronlight.com

comercial@aronlight.pt
export@aronlight.com

DOWNLOAD CATALOG

Cofinanciado pela União Europeia

ARON